



HOME POWER

THE HANDS-ON JOURNAL OF HOME-MADE POWER

ISSUE #87

February / March 2002

\$6.95 U.S.


\$10.95 CAN.

Display until April 1


Growing a Solar-Electric System from Scratch

The Basics: How to Wire Solar Panels

Solar Powered Chocolate Factory

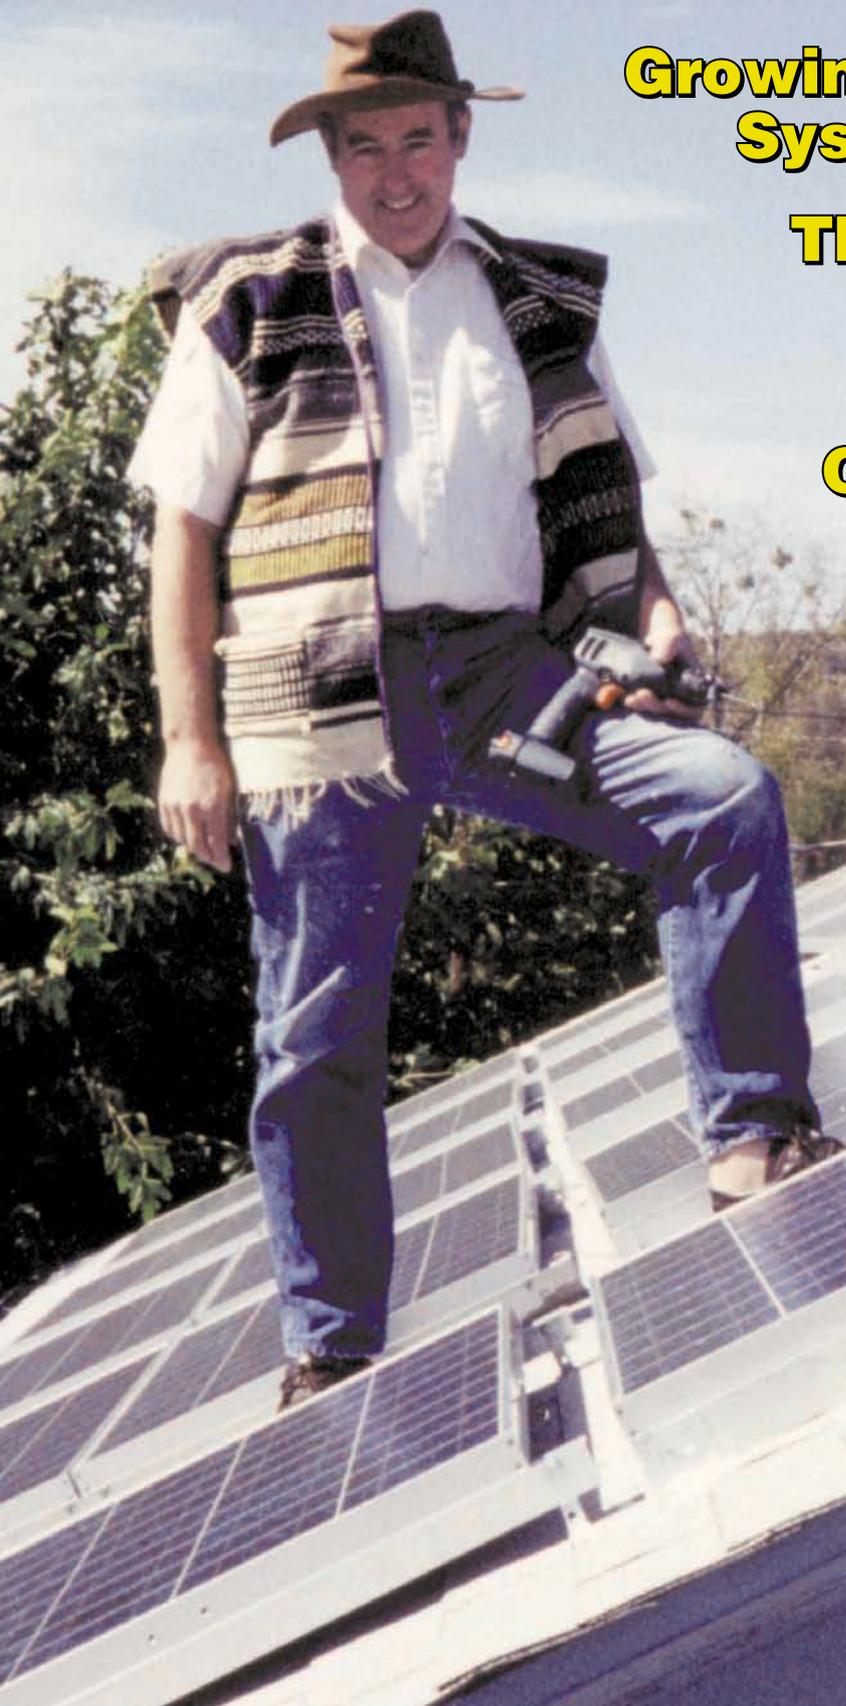

SOLAR ELECTRIC GENERATORS
 WIND POWERED GENERATORS
 SOLAR WATER HEATERS
 SOLAR POOL HEATERS

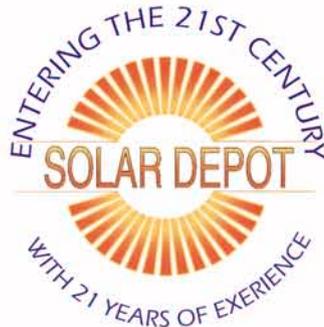

Quality Products
 Technical Support
 Huge Inventory
 On-Line Catalog
 On-Line Ordering
 Staff Engineers
 System Design



SOLAR DEPOT - SAN RAFAEL
 61 PAUL DRIVE
 SAN RAFAEL, CA 94903
 415.499.1333
 FAX 415.499.0316
 ORDER LINE 800.822.4041

SOLAR DEPOT - SACRAMENTO
 8605 FOLSOM BLVD.
 SACRAMENTO, CA 95826
 916.381.0235
 FAX 916.381.2603
 ORDER LINE 800.321.0101

SOLAR DEPOT - SoCAL
 1520-H COMMERCE STREET
 CORONA, CA 92880
 909.737.SOLAR (7652)
 FAX 909.737.7630
 ORDER LINE (800) 680-7922

UTILITY INTER-TIE EXPERTS RESIDENTIAL & COMMERCIAL

Our packaged systems are well thought out and time-tested

Easy to set-up, code compliant & complete with everything you need for a functional system.

All system components have UL listing and all required approvals to qualify for California Cash Rebates.

We Offer Owner-Builder Discounts

Performance and Reliability at Great Prices

Referral to the Solectrogen Dealer-Installer in your area (call us)

Dealer Inquiries Welcome. Free Catalogs to Dealers

WWW.SOLARDEPOT.COM

The Sun Tie XR is available now consult your local distributor



Connect the power of the sun to your utility meter with Xantrex's all new Sun Tie XR inverter. The Sun Tie XR features our new Sunsweep™ Maximum Power Point Technology and an optional remote meter. Harvest the most energy possible from your array and monitor your inverter's power production from the comfort of your home or office. The Sun Tie XR makes producing green power easier than ever before.

tel: 360-435-8826 ext 703 • fax: 360-435-2229
Arlington, Washington USA
www.xantrex.com or www.tracegridtie.com

Low cost, All-in-one design
Works with any type of PV technology

Purchase with Confidence

xantrex
Certified Dealer
RENEWABLE POWER SYSTEMS

www.xantrex.com/REdealers

The BP Solar

advantage

Premium Performance Crystalline

Laser Grooved Monocrystalline

- World leading efficiency—ideal for maximizing power and reducing installation cost
- Market leading energy generating kWh/kWp performance demonstrated in third party tests
- Leading commercial laser cell processing provides a power boost over other technologies
- Superior power tolerance
- Standard 25 year power warranty and 5 year materials and workmanship warranty.

Performance Crystalline

Enhanced Monocrystalline and Multicrystalline

- High power performance achieved through enhanced cell processing technology
- High efficiency and reliability for diverse grid and off-grid applications
- Widest selection of module sizes from 5 to 160 W
- Specialized frame and voltage options for small modules
- Standard 20 or 25 year power warranty.*

High Performance Crystalline

Premium Enhanced Multicrystalline

- Superior energy generating kWh/kWp performance
- Excellent efficiency and reliability through enhanced cell processing technology
- Superior power tolerance
- Attractive dark frame appearance
- Standard 25 year power warranty and 5 year materials and workmanship warranty.

High Performance Thin Film

Advanced Millennia™ & Apollo® Thin Film Technology

- Most cost-effective power output where space is not a constraint
- Market leading thin film efficiencies
- Superior energy generating kWh/kWp performances
- Aesthetic appearance: glass over uniform black substrate easily fits into a building's design
- Standard 20 year power warranty for Millennia™ and 10 year power warranty for Apollo®.

www.bpsolar.com

* Modules 50w and below have power warranties of 20 years or less.

USA
Alternative Solar Products -
California
Toll Free: 800.229.7652
Phone: 909.308.2366
E-mail: mark@alternativesolar.com
Internet: www.alternativesolar.com

Atlantic Solar Products, Inc. -
Maryland
Toll Free: 800.807.2857
Phone: 410.686.2500
E-mail: mail@atlanticsolar.com
Internet: www.atlanticsolar.com

Dankoff Solar Products -
New Mexico
Toll Free: 888.396.6611
Phone: 505.473.3800
E-mail: pumps@dankoffsolar.com
Internet: www.dankoffsolar.com

Effective Solar Products - Louisiana
Toll Free: 888.824.0090
Phone: 504.537.0090
E-mail: esp@effectivesolar.com
Internet: www.effectivesolar.com

Hutton Communications - Georgia
Toll Free: 877.896.2806
Phone: 770.963.1380
Fax: 770.963.9335
E-mail: sales@huttonsolar.com
Internet: www.huttonsolar.com

Intermountain Solar Technologies -
Utah
Toll Free: 800.671.0169
Phone: 801.501.9353
E-mail: orin@intermountainsolar.com
Internet:
www.intermountainwholesale.com

Polar Wire - Alaska
Phone: 907.561.5955
Fax: 907.561.4233
E-mail: sales@polarwire.com
Internet: www.polarwire.com

Schott Applied Power Corp. -
California
Toll Free: 800.777.7075
Phone: 707.923.2277
E-mail: sales@appliedpower.com
Internet: www.appliedpower.com



Superior technologies and the widest choice of solar electric solutions

Wherever and whenever you need power, **BP Solar has the right solution for you.**

As a world leader in solar energy, not only does BP Solar offer the widest range of products and technologies to meet your energy needs, we're also located close to wherever you need us. Our extensive, highly experienced distributor network is ready to serve you, wherever you are, offering quality products and the highest level of customer support.

As a premier solar manufacturer with three decades of experience backed by one of the largest energy companies in the world, the BP Solar name is synonymous with quality, reliability, performance and trust.



the natural source for electricity®

BP Solar means choice.

BP Solar means performance.

BP Solar means solutions.

Solar Depot, Inc. - California
Toll Free: 800.822.4041
Phone: 415.499.1333
E-mail: info@solardepot.com
Internet: www.solardepot.com

Southwest PV Systems - Texas
Toll Free: 800.899.7978
Phone: 281.351.0031
E-mail: swpv@southwestpv.com
Internet: www.southwestpv.com

Sun Amp Power Company - Arizona
Toll Free: 800.677.6527
Phone: 480.922.9782
E-mail: sunamp@sunamp.com
Internet: www.sunamp.com

TalImage Solar Engineering, Inc. -
Solar Market - Maine
Toll Free: 877.785.0088
Phone: 207.985.0088
E-mail: sm@solarmarket.com
Internet: www.solarmarket.com

CANADA
Powersource Energy Systems -
Alberta
Toll Free: 888.291.9039
Phone: 403.291.9039
E-mail: info@powersourceenergy.com
Internet: www.powersourceenergy.com

Powersource Energy Systems -
British Columbia
Toll Free: 888.544.2115
Phone: 250.544.2115
E-mail: info@powersourceenergy.com
Internet: www.powersourceenergy.com

Powersource Energy Systems -
Ontario
Toll Free: 866.730.5570
Phone: 705.730.5570
E-mail: info@powersourceenergy.com
Internet: www.powersourceenergy.com

Trans-Canada Energie - Quebec
Toll Free: 800.661.3330
Phone: 450.348.2370
E-mail: rozonbatteries@yahoo.com
Internet: www.worldbatteries.com



NOW in the US!

Sunny Boy 2500

- SMA, the leading supplier of grid tied PV systems in Europe, is now in the US!
- Get to know our trend setting technology of String Inverters
- We have over 60 MW AC of total "Sunny Boy String Inverter" power installed so far
- Over 40,000 Sunny Boy String Inverters sold up to now

**Now UL Listed to UL 1741
for Grid Interactive Inverters**



Join our Sunny Family and benefit from our Sunny Boy String Inverters with ...

- 5 Year Warranty - reliable and safe!
- Our Sunny Boys meet highest quality requirements - see our results in high-quality tests!
- Easy Outdoor Mounting with Protection Class NEMA 4X / IP 65
- Easy to install by using a three-point mounting system
- Multiple Communications and data collections that can be customized for any system



SMA America, Inc.
20830 Red Dog Road
Grass Valley, CA 95945

Phone 530 - 273 - 4895
Fax 530 - 274 - 7271

**Advanced System Technology for
the Successful Photovoltaic Future**

SMA
www.SMA-AMERICA.com • www.SMA.de

RECYCLED POWER



At U.S. Battery, we're committed to doing our part in keeping the environment clean and green for future generations, as well as providing you with premium deep cycle products guaranteed to deliver your power requirements when you need them.



**DON'T SETTLE
FOR ANYTHING LESS
THAN U.S. BATTERY
PRODUCTS!**

1675 Sampson Ave. Corona, CA 91719 (800) 695-0945 / 653 Industrial Park Dr., Evans, GA 30809 (800) 522-0945



HOME POWER

THE HANDS-ON JOURNAL OF HOME-MADE POWER

Issue #87

February / March 2002


Features



10 Solar Chocolate!
Moth Green discovered the golden ticket—sunshine. His chocolate cooperative on the island of Grenada uses local beans and solar power to make some powerful good candy.




24 Solar Evolution
Simon Wheaton-Smith suffered a grid outage—that got him started with solar. Now, an admitted hobbyist, he loves his plug-and-play system with 2,630 watts of PV and five inverters.

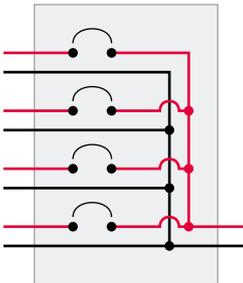

36 Out of the Box Basics
Wiring a PV array is not as tricky as you'd think, once you've made some basic decisions. Joe Schwartz explains the basics of nominal system voltage and series & parallel PV wiring.



44 The Truth about Payback
Solar installers are often asked about the payback period on renewable energy systems. Here, the pros get philosophical with the real justifications for going solar.



54 The Diet of the Beast
Energy analyst and activist Randy Udall lays out the implications of data from a DOE graph of the ins and outs of U.S. energy flow.

Energy Fairs

58 Energy Expo—Iowa
The Franciscan Center in Hiawatha was a natural and RE-worthy setting for this tenth annual fair hosted by the Iowa Renewable Energy Association.

64 RE Roundup—Texas
Forget oil. The Texas Renewable Energy Industries Association and the Texas Solar Energy Society team up for a celebration of the state's new energy odyssey.

70 Solar Fiesta—New Mexico
The Autumnal Equinox was a perfect weekend for over 2,000 folks to converge on the Pueblo Cultural Center in Albuquerque for this RE extravaganza. Thanks to the New Mexico Solar Energy Association for hosting.

GoPower

74 Good Things Come in Small Packages
City Cars are the urban solution—faster and with more range than an NEV, yet still electric, and compact compared to even the smallest of gas machines.

94 Wire Gauges
Mike Brown tells how to connect these necessary windows into EV operation.

Simon Wheaton-Smith and PVs in the sunny Southwest. Inset: Kids in Grenada score on the solar powered chocolate.

Guerrilla Solar

- 82** **Guerrilla 0018**
960 watts of PV fill the batts and backfeed the grid. This guerrilla enjoys the freedom of free electricity.

One More Feature

- 86** **RE Chronology**
PV systems are modular and expandable. As Cliff Millsapps has moved around the country, he's been able to take his solar-electric system along with him.

Book Review

- 120** **Buying Rural**
Finding and Buying Your Place in the Country hasn't landed Eric property yet, but he'll know it when he sees it.

Columns

- 100** **Word Power**
Electricity analogy.
- 102** **Power Politics**
Michael Welch and his cohorts just say "no" to U.S. pipe dreams in Afghanistan and Siberian nuke dumps.
- 108** **Independent Power Providers**
Don Loweburg mixes up a power potpourri.

More Columns

- 112** **Code Corner**
John Wiles talks about changes to the National Electrical Code.
- 116** **Woodst Thou?**
Kathleen solves her woodshed problem, at least for now. Also, tips on coziness through combustion.
- 124** **The Wizard**
Water, water everywhere, and not a drop to electrolyze.
- 136** **Ozonal Notes**
You can buy from a wrench or a dot commer, but you need to evaluate your RE abilities.

Regulars

- 8** **From Us to You**
- 80** **HP's Subscription Form**
- 81** **Home Power's Biz Page**
- 122** **Happenings—RE Events**
- 126** **Letters to Home Power**
- 135** **Writing for Home Power**
- 139** **Q&A**
- 142** **MicroAds**
- 144** **Index to Advertisers**

Access and Info

Access Data

Home Power
PO Box 520
Ashland, OR 97520 USA

Editorial:

Phone: 530-475-3179
Fax: 530-475-0836

Subscriptions and Back Issues:
800-707-6585 VISA / MC
541-512-0201 Outside USA

Advertising:

Phone: 800-707-6585
or 541-512-0201 Outside USA
Fax: 541-512-0343

Email: hp@homepower.com

Web: www.homepower.com

Paper and Ink Data

Cover paper is 50% recycled (10% postconsumer / 40% preconsumer) Recovery Gloss from S.D. Warren Paper Company.

Interior paper, Pinewood Web Dull, a 55# 50% postconsumer, ECF, manufactured by Crown Vantage, a peroxide/oxygen based mill in St. Francisville, Louisiana.

Printed using low VOC vegetable based inks.

Printed by

St. Croix Press, Inc.,
New Richmond, Wisconsin

Legal

Home Power (ISSN 1050-2416) is published bi-monthly for \$22.50 per year at PO Box 520, Ashland, OR 97520. International surface subscription for US\$30. Periodicals postage paid at Ashland, OR, and at additional mailing offices. POSTMASTER send address corrections to *Home Power*, PO Box 520, Ashland, OR 97520.

Copyright ©2002 *Home Power*, Inc.

All rights reserved. Contents may not be reprinted or otherwise reproduced without written permission.

While *Home Power* magazine strives for clarity and accuracy, we assume no responsibility or liability for the use of this information.



This paper is recycled and recycleable.

Solar City

People

Tom Bishop
Mike Brown
Sam Coleman
Moth Green
Eric Grisen
Kathleen Jarschke-Schultze
Rose Marie Kern
Stan Krute
Don Kulha
Don Lowebug
Cliff Millsapps
Ken Olson
Stephany Owen
Karen Perez
Richard Perez
Linda Pinkham
Jason Powell
Shari Prange
Benjamin Root
Connie Said
Joe Schwartz
Allan Sindelar
Randy Udall
Michael Welch
Simon Wheaton-Smith
John Wiles
Dave Wilmeth
Jennifer Wine
Ian Woofenden
Rue Wright
Solar Guerrilla 0018

“Think about it...”

*“Is there any man,
is there any woman,
let me say any child here
that does not know that the seed
of war in the modern world
is industrial and commercial rivalry?”*

—President Woodrow Wilson,
a year after the first world war ended

Photo courtesy of Charlene Rosenblum

The Northern Californian poet Gary Snyder once wrote, “Revolution begins in the country.” For the last two decades, the solar revolution has been quietly taking place in tens of thousands of off-grid homes in the U.S. Well, the solar revolution just moved to the big city.

On November 6, 2001, San Francisco residents voted for solar and wind energy, and they did it in a big way. Seventy-three percent of those voting just said “yes” to the Solar Revenue Bond, better known as Proposition B. The vote gave the green light to a US\$100 million dollar investment in city-owned solar and wind generation facilities and energy efficiency programs.

Proposition B took a creative economic approach. The Solar Revenue Bond will be repaid exclusively by the city’s future savings in expenditures on electricity. Unlike general obligation bonds typically used to fund libraries or parks, revenue bonds are not funded by an increase in property or other state taxes. For the financial details on the Solar Revenue Bond, check out: www.votesolar.org/the_proposal/budget_analysis.htm.

The bond will fund an estimated 10 to 12 *megawatts* (MW) of photovoltaic generation. The PVs will be installed over the next two to four years on city-owned buildings in sunnier areas of this city known for its foggy weather.

San Francisco’s decision to go solar is likely to have a strong impact on the U.S. photovoltaic industry. In the year 2000, U.S. manufacturers produced 75 MW of photovoltaics. Over 50 MW of these PVs were exported, primarily to Germany and Japan. The PVs required to implement Proposition B equal close to 50 percent of the PV capacity installed in the U.S. in 2000.

In addition, Proposition B will also fund the development of 30 MW of city-owned wind turbines scheduled to be installed in Alameda and San Mateo counties. For comparison, the entire U.S. may have as much as 4,500 MW of industrial-scale wind generation installed by the end of 2001.

The past year has left Californians reeling as skyrocketing energy costs and iffy power supplies threatened to bankrupt the state treasury. The City of San Francisco’s expenditures on electricity jumped from US\$7 million in 1998–1999 to US\$39 million in 2000–2001. As a result, San Franciscans have come to realize the value of locally owned and operated electricity generation.

If San Francisco’s overwhelming commitment to renewable energy is well administered and skillfully implemented, the city could serve as a model for large cities across the U.S. Above all else, the San Francisco vote signals that mainstream America is ready for renewables.

—Joe Schwartz for the *Home Power* crew

Most Power Now

NOMAD 1500

Portable Solar Power System

No tools needed

A modular, portable system that's ideal for backup power or remote electrification.

- Charge protection
- 1500 watt inverter
- AC 110v and DC 12v
- 60 amp hour battery (easily expanded)
- 32 to 240 watts of PV



ALSO AVAILABLE



NOMAD 300

NOMAD 600

**Complete portable systems
from \$279**

**Shown with 240 watts of
Kyocera PV**

\$1930 USD + S&H


Also available with Uni-Solar

Toll Free **1-877-797-6527**
www.SolarSense.com

SolarSense.com
A Division of ARISE Technologies Corporation

SOLAR POWERED CHOCOLATE FACTORY


Moth Green
©2012 Moth Green

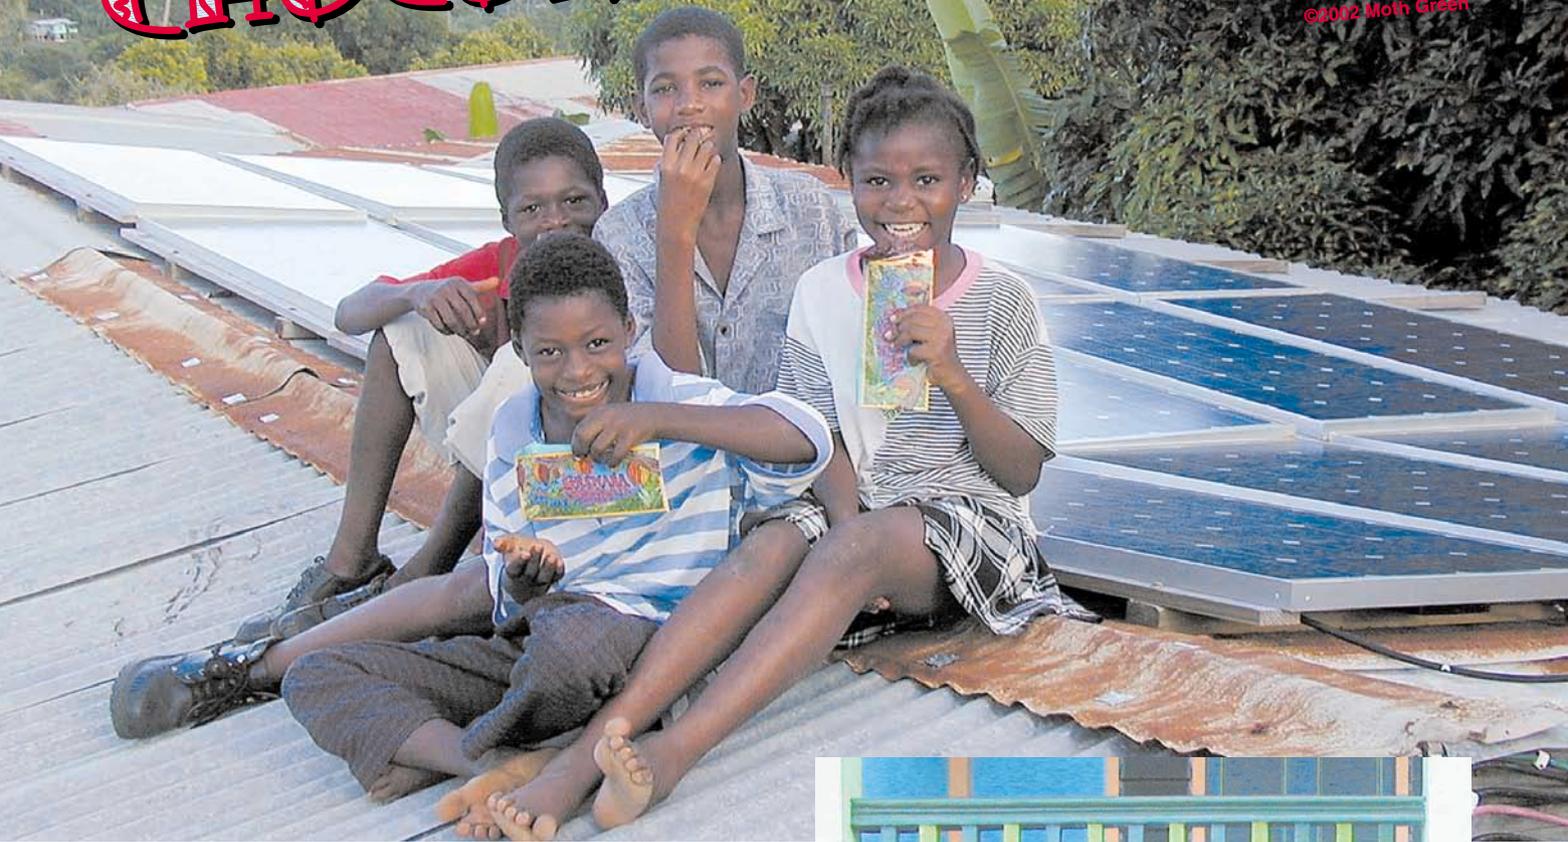

Local kids get a taste of local chocolate and local energy.

While doing PV and intermediate technology volunteer work on the island of Grenada, I became fascinated with the cocoa tree. My favorite pastime became simple, kitchen-style processing of cocoa beans into luscious hot chocolate. After a while, I began to dream of creating a solar powered chocolate factory in the lush, cocoa-producing southern Caribbean.

Grenada Chocolate Co. founders Edmond Brown, Moth Green, and Doug Browne in front of their cottage factory.

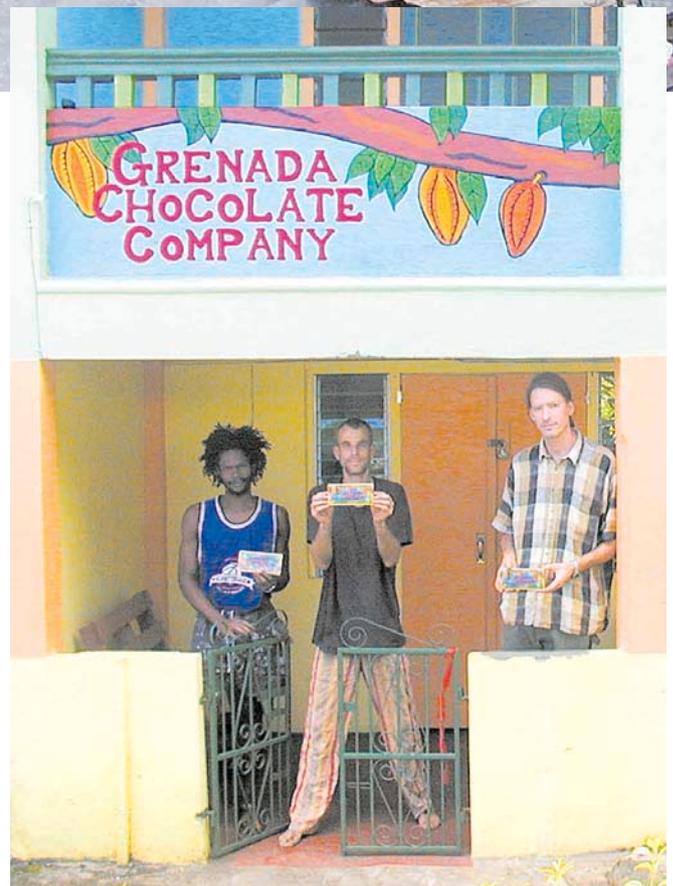

The price for cocoa beans paid to Grenadian producers is marginal compared to the price of fancy chocolate. So I began to fantasize about making dark chocolate with a cooperative that would actually benefit the cocoa farmers. Grenada's world famous cocoa would be used to create top quality, nonexploitive chocolate bars right in Grenada. Four years ago, together with two partners and a startup loan, I embarked on this chocolaty journey.

Fine chocolate making is a rather complex process involving several different machines. Fresh, pulpy cocoa beans are first harvested from the pods growing on cocoa trees. They are then fermented in a large wooden box for about seven days, and sun dried. The fermentation gives rise to all the chocolate flavors.

The dry cocoa beans are roasted, shelled, and ground together with sugar into a "liquidy" paste. Pure cocoa butter, pressed from other roasted cocoa beans, is added to this paste, and the mixture is further ground, tumbled, and slow-cooked for up to 48 hours. The resulting finished liquid chocolate is then tempered, molded, and cooled into chocolate bars.

The machines used in the process are the roaster, winnower, melangeur (chocolate grinder), cocoa butter press, refiner/conche, tempering kettle, and vibration table.

The melangeur is a refurbished antique chocolate grinding machine with two, 500 pound (227 kg), solid granite rollers. It has a retrofitted, 24 volt permanent magnet motor, and crushes the roasted cocoa beans.



Sixteen, 120 watt AstroPower modules provide power directly to DC-driven, chocolate making machines.

The Research Stage

The first step in our chocolate odyssey was to convince a couple of big U.S. chocolate factories to allow us to see their process and machines. Later, we located a couple of textbooks on chocolate manufacturing. Quickly it became clear to us that small-scale machinery for quality chocolate making is no longer manufactured. The conversion of cocoa beans to bulk chocolate is only done at very large factories with very large machines these days.

My chocolate dreams and my renewable energy instincts inevitably collided. My new vision was to build a solar powered chocolate factory. We wanted the most efficient machines possible, because chocolate making is a very energy-intensive process for a PV system to handle. For over two years, we experimented with designing our own chocolate making machines, as well as refurbishing a couple of antique machines.


On all these machines, we used DC, permanent magnet motors, which allow efficient direct powering from the PVs or batteries. In my partner Doug's barn in Oregon, we built and tested several generations of machines, including wood-fired roasters, winnowers, grinders, and cocoa butter presses. We tested them by processing cocoa beans we imported from Grenada.

After many months, lots of brainstorming, and a few dead ends, we had a machine line we were happy with, and chocolate we were addicted to. We packed up all our machinery and solar-electric equipment, and sent it on a ship to Grenada about two years ago.

Building the Factory

It was natural to create our little factory in the countryside village that I had lived in over the years. I built a bamboo house in this village, and had created independent appropriate technology projects here, such as teaching solar cooker and hand-powered water

THE CHOCOLATE PROCESS

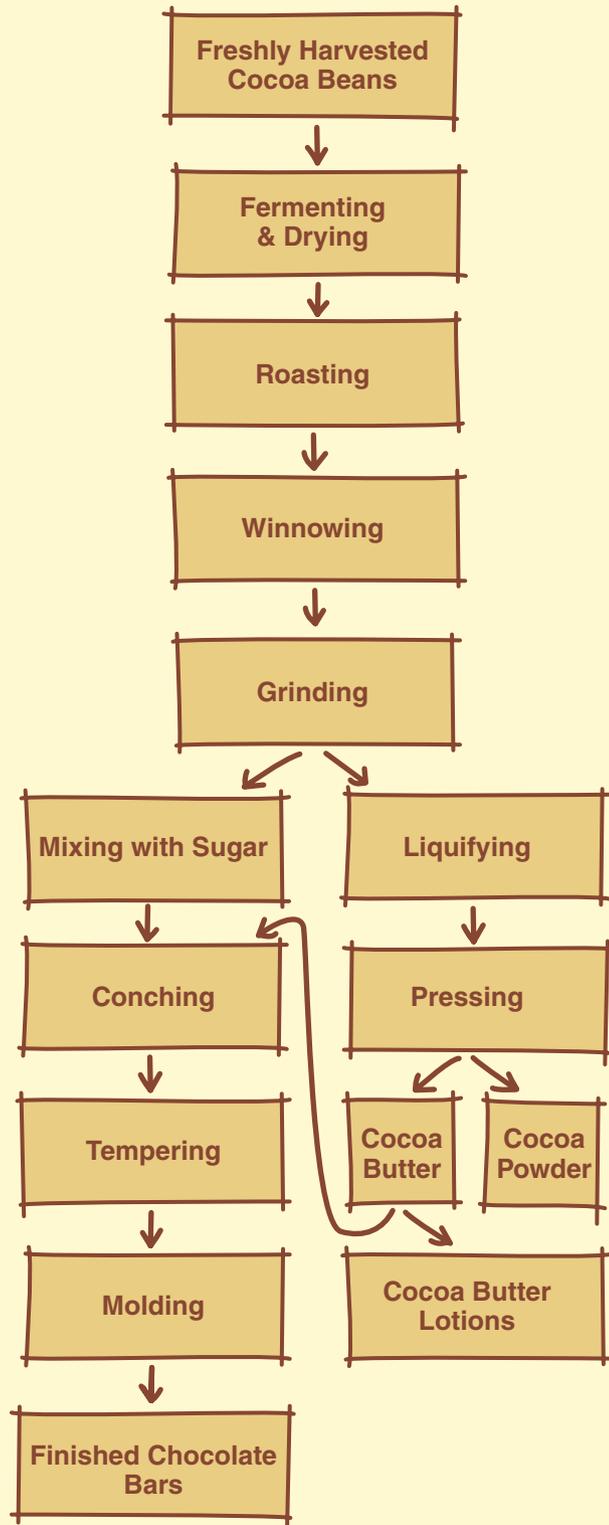

The author pouring cocoa beans into a homemade roaster. A 24 volt DC motor powers the tumbler, which allows the beans to roast uniformly.

pump design in schools and to farmers. I also helped several far-from-the-grid people get acquainted with small photovoltaic power systems for lighting and radio playing in their houses. This village, Hermitage, is also in the heart of the cocoa-growing belt of Grenada.

Together with my two partners, one from Oregon and one from the same village, I started the Grenada Chocolate Company. We began the transformation of an old, abandoned, concrete building into our chocolate "cottage factory." We redesigned the interior of the building to suit our needs piece by piece, simultaneously assembling and wiring our machines.

Because of the hot, humid, tropical climate here, we required air conditioning in two special rooms, one for molding and wrapping chocolate bars, and one for storing chocolate for its crucial aging period. We used efficient, mini-split, ductless-type air conditioners (Lennox LX WM 10F-AFAB).

This type of room air conditioner is common in Asia and Europe. They are relatively efficient because the compressor is located outside the building. They are similar to central air conditioning systems, but are ductless. The coolant simply circulates through pipes in and out of the building, expanding and getting cold in front of a blower inside, but losing its heat in the compressor outside the building.



Refurbished antique winnowing machine, retrofitted with 24 volt DC motors (one motor for vibration and one motor for a powerful fan), removes the outer shell of the roasted cocoa beans.

One interesting thing about designing and implementing our electric system was that we did not have to worry about following codes here in Grenada. There are codes for regular AC wiring, but DC systems are so rare that they never made or adopted any codes for DC wiring and PV installation. We simply did a solid and safe job by our own standards, and we were able to create a suitable system for our unique situation.

Power System

The chocolate factory is on the grid, and there is no provision in Grenada to sell power to the utility. But the grid power is not reliable enough to count on. It can go off for an entire day once or twice a month, and it goes off for fairly brief periods every couple of days. Not only does the grid go off unexpectedly, but the grid transformers around the country are often overloaded. The electric grid in Grenada is designed to run at 230 VAC, 50 Hz. But overloading regularly brings line voltage down as low as 195 V.

Sometimes we need to run the generator even when the grid is on to get a sufficient voltage to run our battery charger and refiner machine effectively. We also have to watch out for very low voltage when the grid first comes back on. We had to replace an electronic temperature

control unit on our refiner/conche machine, which we suspect died this way.

We designed most of the factory's loads to run on DC power directly, using the grid to charge our batteries when the PVs cannot provide sufficient energy. When the grid fails unexpectedly, we don't have to worry about any type of backup system switchover to keep our machines moving and prevent our chocolate from burning. Unlike the grid, the batteries won't fail abruptly. We also have some AC loads, such as lights and the air conditioners, which we power either with an inverter, the grid directly, or an engine generator.

PVs & Wiring

We installed sixteen AstroPower, 120 watt PV modules (1.9 KW rated total, at 25°C; 77°F) on our roof, configured for 24 volts. We made our own mounting system out of treated 2 by 3 lumber. Essentially, we installed another set of rafters on top of the corrugated metal roofing, directly over the actual rafters underneath. We lag bolted them together through the metal.

The PVs were first mounted on 1 by 3s the length of the modules, and then laid down and lag bolted across the 2 by 3s. This provided a sturdy mounting and a cooling air gap underneath the modules. It does have the disadvantage of making it less convenient to check the connections in the PV junction boxes.

The PVs are interconnected with #10 (5 mm²) stranded wire that is tucked underneath the panels to hide it from

Wendy-Ann Edgar pouring sugar into the antique melangeur.





Edmond Brown works the cocoa butter press. A 24 volt homemade blender (not shown) blends up hot, ground liquid cocoa to feed the press.

the extreme UV. The array is split into two separate 24 V subarrays, each with two #4 (21 mm²) wires attached. The subarrays each have their own 45 amp DC breaker going into the charge controller in the load center.

The dual breaker system offers the convenience of comparing the total number of incoming solar amps from the two subarrays by turning one off at a time. This is a nice way to gain some instant reassurance that all the PVs are functioning the same and, therefore, properly.

Because the chocolate factory is wired for DC as well as AC, a variety of wiring was used. Several 24 VDC and a couple of 12 VDC circuits for the machines are wired using single conductor, stranded #12, #10, #8, and #6 (3, 5, 8, and 13 mm²) wire from the load center. Romex type

wire was used for the two different kinds of 120 VAC and the 230 VAC circuits.

Balance of Systems

The system also includes four Trojan L-16 high-capacity batteries (395 AH at 6 VDC each), a Heliotrope SolPan 110 load center/control system with a Heliotrope CC-120, 120 amp charge controller; a Quick Charge 60 amp, 24 volt forklift battery charger; and a Honda propane powered engine generator.

The battery bank capacity is relatively small (395 amp-hours at 24 V) because, for now, we don't have enough solar generating capacity to cover the total consumption of the factory anyway. So the batteries get used as a buffer (a voltage stabilizer), powering loads day and night, while being simultaneously charged by some combination of the PVs and the battery charger.

We use a manual-start 5 KW engine generator that we converted to be fueled with propane with a spud/regulator kit. The 230 VAC (our grid voltage here in Grenada) output of the generator is connected through a homemade isolation/transfer system that uses two 60 amp receptacles and one 60 amp plug wired to the grid panel. With this setup, the 230 VAC loads can easily be manually switched between the grid and the generator.


A 2,400 watt Trace modified square wave inverter is powered by the battery bank. The inverter output is wired to a separate 120 VAC, 60 Hz breaker panel. We wired special inverter-powered 120 VAC receptacles from this panel at various places around the building where we need them.

Controls & Warnings

The battery charger cycles on and off automatically as needed, using a power relay and a commercial voltage sensing switch. This sensing switch has two setpoints. We set it to turn the charger on when the battery

Chocolate Factory Loads

<i>DC Load</i>	<i>Volts</i>	<i>Amps</i>	<i>Watts</i>	<i>Average Hrs./Day</i>	<i>Average WH/Day</i>
Granite stone chocolate grinder	24	40.0	960	8.0	7,680
Inverter (for AC loads)	24	19.0	456	11.0	5,016
Chocolate temper kettle	24	43.0	1,032	4.0	4,128
19 DC CF lights	24	10.5	252	10.0	2,520
2 Vent fans	24	1.3	30	24.0	720
Cocoa bean winnower	24	33.3	799	0.8	599
Cocoa butter press	24	4.0	96	2.0	192
2 Mold cooling fans	24	2.0	48	4.0	192
Cocoa bean roaster	12	5.0	60	2.0	120
Chocolate mold vibrator	12	1.5	18	3.0	54
				<i>Total</i>	21,221

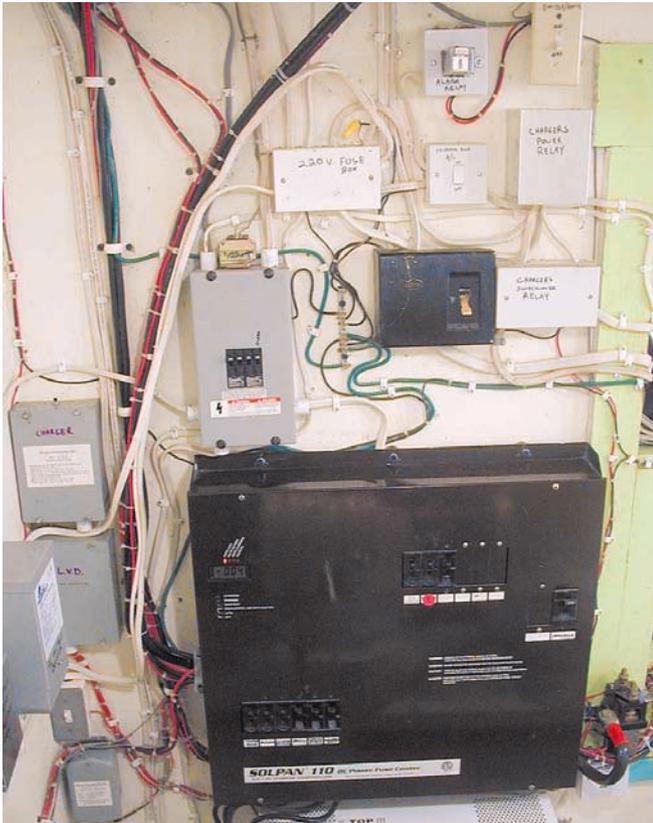

The power wall including the SolPan 110 DC load center, which contains a Heliotrope CC-120 charge controller.

voltage drops to 23 volts DC, and to shut off when the voltage reaches 26 volts DC.

Because some of the loads are running constantly, we don't try to use the AC charger to top off the batteries. The energy used to raise the voltage of the system higher than necessary for powering the loads would just be lost as heat in the motors and batteries.

We also don't want the charger to come on at too high a voltage, so the PVs always get the first chance to power the factory. The batteries seem to stay healthy because, naturally, once in a while we stop making chocolate. Then the PVs get a chance to top off the batteries.

The Heliotrope charge controller has an adjustable voltage regulation setpoint, over which it switches to pulse width modulation mode to keep that voltage steady by controlling the current. Below this setpoint, the charger allows the full current from the PVs to enter the batteries. For the first six months, we had the setpoint at 29 volts. This seemed safe and practical for our Trojan L-16 deep-cycle batteries.

But we found that the batteries were drying fast, needing watering quite often, presumably due to the very high average ambient temperature here. We have since lowered the setpoint to 28 volts to avoid



The AC charger, used for grid backup, sits atop the vented battery box that holds four Trojan L-16Hs.

shortening our batteries' lives. We put in an override switch as well, so we can also use the battery charger to top off the batteries in case of bad weather.

An alarm, powered by the battery bank, of course, warns us when the grid goes down. It is activated by a

Two 230 V receptacles allow a choice between utility or generator power. The LED and stereo indicate a hot grid.





The voltage sensors and controls for the low voltage disconnect and AC battery charger.

normally closed relay that is usually held open by power from the grid panel. When the grid goes off, the relay closes the alarm circuit, telling us that we need to watch what is going on and start the generator if necessary.

If a grid outage went unnoticed, the battery bank could be depleted after some hours, and our low voltage disconnect system (LVD) would come into play. For our LVD system, we use another voltage controlled switch and an electric car contactor. After the low voltage disconnection, if it gets sunny enough or the generator is started and the battery charger comes on, the voltage goes right up, and the contactor turns on the factory.

Not only do we have to be alerted when the grid goes off, but we also need a “grid-back-on-alarm.” Without it, we wouldn’t know when we could stop the generator and save propane. So we installed a fused, 230 V LED outlet directly to the large, grid powered receptacle of the transfer system. When the grid comes back on, this special outlet turns on. Either the lit LED or a radio plugged into the outlet alerts us that the grid is on again.

The Loads

We use several types of electricity at the factory. Our larger DC loads, including the chocolate grinder (melangeur), the tempering kettle, the cocoa butter

press, and the winnowing machine, are routed through 75, 75, 45, and 30 amp DC-rated breakers, respectively, in the load center.

We also added two, five-circuit fuse blocks inside the load center. One is used for additional, low power 24 VDC loads such as the roaster’s rotation motor and DC lights. A Solar Converters, 24 to 12 volt buck converter (DC-to-DC voltage converter) powers a few small 12 VDC loads via the second fuse block. The inverter’s DC input is routed through a 175 amp breaker, which is also located inside the load center.

The generator produces 230 VAC at 60 Hz. The air conditioners are 230 VAC, 50 Hz. The AC compact fluorescents (CFs) are 120 VAC, 60 Hz. We are mixing and matching frequencies between several of our appliances except for the AC CFs, which are always powered by the 120 VAC, 60 Hz inverter. Our loads don’t seem to care.

In Grenada, tools and appliances and the like are imported from both the U.S. and Europe, so you never know what you might find. Many houses have 230 to 120 VAC transformers to run their fridges, TVs, stereos, etc. Some of our tools, as well as some of the components we put into our chocolate machines, need 120 VAC.


To cover all situations, we wired the factory with two types of 120 VAC. Some 120 VAC outlets are powered by the inverter, and others are powered by the grid or the generator through a step-down transformer (so we have 120 volts at 50 Hz from the grid or 60 Hz from the inverter).

Some of our lights in the factory are powered by the inverter. Other lights are DC. All the lights are compact

Chocolate Factory System Costs

<i>Item</i>	<i>Cost (US\$)</i>
16 AstroPower 120 W modules	\$8,640
Trace DR2424 modified square wave inverter	1,285
Honda EG5000X generator	1,200
Heliotrope load center w/ controller	1,175
4 Trojan L-16H batteries, 395 AH	840
Quick Charge battery charger	520
2 Solar Converters voltage-sensing switches	300
U.S. Carburetion propane fuel adaptor kit	275
KTA Services electric car contactor	145
Solar Converters buck converter, 24/12 V	140
Charger turn-on relay	32
Alarm activation relay	11
Total	\$14,563

GRENADA CHOCOLATE COMPANY SYSTEM

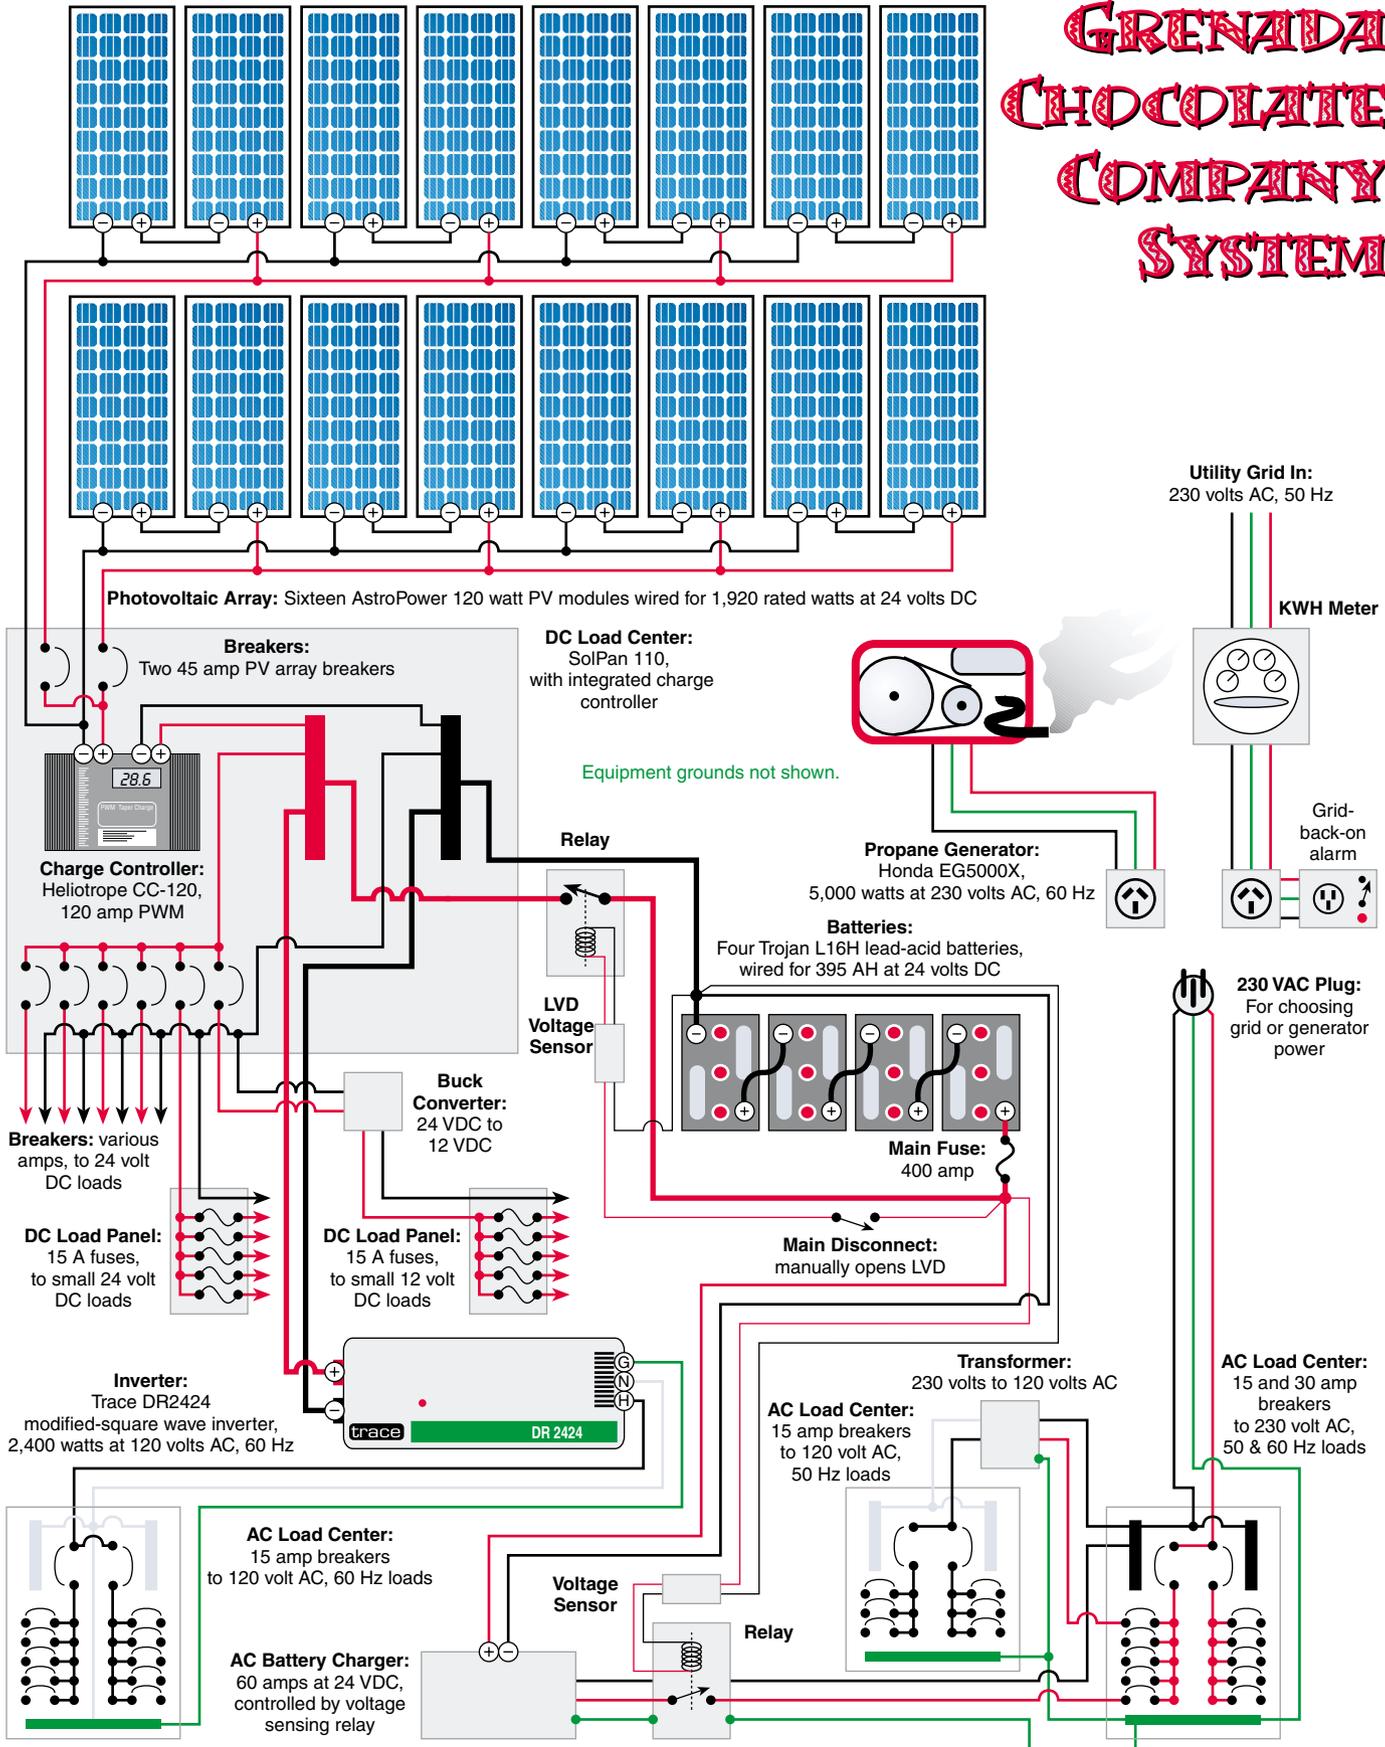

fluorescents, of course. Our chocolate refiner (conche) machine, the battery charger, and the air conditioners run on 230 VAC directly off the grid or generator.

Four Voltages

With all the various requirements for our factory's equipment, we actually ended up having four different voltages and two frequencies of 120 VAC! The grid and our air conditioners are 230 VAC. Our inverter and our transformer provide us with 120 VAC modified square wave 60 Hz, and 120 VAC sine wave 50 Hz, respectively. We have various components, controls, and tools that use 120 VAC. Some of them prefer 60 Hz, while others would rather have a true sine wave at 50 Hz to operate properly.

Most of the machines and lights use 24 VDC, our system's nominal voltage. But one of the permanent magnet gear motors that we needed was only available in 12 VDC. That's why we installed the 12 VDC fuse block inside the load center. It is handy anyway because a lot of the DC tools and appliances we can find, such as fans, are 12 V.

Being situated on a little island in the sea causes us to end up with motors and other devices imported from all over the world with various voltages. By having all the common voltages, we can cover almost any situation as we continue to tinker and figure out the best way to expand our operation's output. It's a complicated system, and not something I'd recommend in most cases.

Future Solar Plans

Who said it's not practical to power air conditioners with PVs? The mini-split type we use is quite efficient. Our 9,000 BTU per hour unit only draws 970 watts, and cycles off quite often in our small insulated room.

My ballpark estimate is that each air conditioner is on about a quarter of the time on the average, or a total of twelve hours per day for the two units. This gives an approximate total of 11.6 kilowatt-hours per day. With a large 230 volt inverter and another 6 kilowatts of PV, we should be able to solar power the entire factory, including the air conditioners, most days of the year down here in the sunny Caribbean.

SOLAR POWERED CHOCOLATE COOLER

We needed a way to keep our chocolate at about 70°F (21°C) when selling at beach parties. Thermoelectric coolers, commonly used by truck drivers to keep drinks cool, are perfect for use with PVs because they cool mildly and use little power.

A phenomenon known as the Peltier effect causes one side of a thermoelectric module to get hot and the other cold when electric current is applied. When the module is coupled with a heat sink on one side and a heat conductive plate on the other, it acts like a heat pump, keeping the inside of the cooler cool.

We added thermoelectric cooling to a regular cooler (Coleman, US\$55) by incorporating an aluminum plate (scrap yard, US\$8), a Peltier cooling module (US\$15), a block of aluminum (scrap yard, US\$6), a heat sink (US\$10), and a 12 V muffin fan (US\$9) into one wall of the cooler. A square chunk of the cooler wall and insulation was cut out to accommodate the unit. The 2 by 2 inch (5 x 5 cm) Peltier module and the block of aluminum were placed where the insulation was, with the cold side of the module facing in against the aluminum plate, which was mounted on the inside of the cooler.

The hot side of the module faces out against the aluminum block. The other side of the aluminum block contacts the heat sink, mounted on the outside of the cooler, with the fan attached. Thermal conductive compound was applied to all meeting surfaces. A 55 watt Siemens PV module (US\$330) is connected directly to the positive and negative

terminals of the thermoelectric module and the fan in parallel, using #12 (3.3 mm²) wire.

The nice thing about a PV powered thermoelectric unit is that the more current available to the module, the colder it will get. When it is sunniest and hottest, we get the most cooling power. The maximum cooling happens at 5.5 amps for this thermoelectric module. So we get less than half its full effect from the single 55 watt PV module, which seems to be enough if we are in the shade. If we need extra cooling power, we could just add another PV module.

Peltier effect cooler and PV panel.



Another difficulty is that we have to store sacks of cocoa beans for months during the off-season. They spoil quickly in this very hot, humid, tropical environment. There is certainly not enough space in our little air conditioned rooms to store cocoa beans. So we plan to get a small cargo ship container and convert it into an independently PV powered, air conditioned, cocoa bean storage unit.

We'll need approximately 2 kilowatts of PV (which will shade the roof of the container as well), another 230 volt inverter, a separate set of batteries, and another mini-split air conditioner. Large PV systems like this are expensive, of course, but if the loans to acquire them are attainable, we see them as buying our chocolate making energy long in advance.

Chocolate Power!

Finally, after years of tinkering, munching on chocolate, and sweating profusely, we have completed the factory and successfully tested all systems. Our little chocolate making cooperative can crank out about 300 pounds (136 kg) of chocolate and cocoa powder every week, enough for the local and tourist markets.

One month after our product launching, we are feeling very encouraged. The foreigners and tourists are impressed with our products, since they are used to dark chocolate. Grenadians themselves are just getting used to the idea. Only low quality milk chocolate has ever been imported, and we are the first chocolate company in Grenada. It's fun that people here can finally enjoy the luxury of high quality chocolate after supplying the fancy European chocolate companies with cocoa beans for over a century.

Grenada's cocoa is some of the strongest in the world. It is also particularly clean cocoa, very rarely sprayed with pesticides. Eventually we will export our chocolate, but for now, we will just be keeping up with the local market. We are probably the smallest chocolate factory in the world, and perhaps the only solar powered one.

Access

Moth Green, The Grenada Chocolate Company, Ltd., Hermitage, St. Patrick's, Grenada, West Indies
473-442-0050 • moth@grenadachocolate.com
www.grenadachocolate.com

AstroPower, Inc., Solar Park, 461 Wyoming Rd., Newark, DE 19716 • 866-218-2797 or 302-366-0400
Fax: 302-368-6474 • sales@astropower.com
www.astropower.com • PV modules

Trojan Battery Company, Inc., 12380 Clark St., Santa Fe Springs, CA 90670 • 800-423-6569 or 562-946-8381
Fax: 562-906-4033 • marketing@trojanbattery.com
www.trojan-battery.com • Batteries



Doug Browne and Wendy-Ann Edgar wrap finished solar powered chocolate, and try not to eat too much.

Xantrex Technology, Inc., Distributed Residential and Commercial Markets, 5916 195th St. NE, Arlington, WA 98223 • 360-435-8826 • Fax: 360-435-2229
inverters@traceengineering.com • www.xantrex.com
Inverter

Solar Converters, Inc., C1-199 Victoria Rd. S., Guelph, ON, Canada, N1E 6T9 • 519-824-5272
Fax: 519-823-0325 • info@solarconverters.com
www.solarconverters.com • Voltage controlled switches (model VCS-2) and buck converter, 24 to 12 volts (model EQ 12/24-20)

KTA Services, Inc., 944 West 21st St., Upland, CA 91784 • 909-949-7914 • Fax: 909-949-7916
www.kta-ev.com • Electric car contactor and main battery fuse.

Quick Charge Corp., 1032 S.W. 22nd St., Oklahoma City, OK 73109 • 800-658-2841 or 405-634-2120
Fax: 405-632-5667 • contact@quickcharge.com
www.quickcharge.com • Forklift battery charger

Honda Power Equipment Group, 4900 Marconi Dr., Alpharetta, GA 30005 • 800-426-7701 or 770-497-6400
Fax: 678-339-2670 • www.honda.com • Generator

U.S. Carburetion, Inc., HC79, Box 130, Building B-1, Canvas, WV 26662 • 800-553-5608 or 304-872-7098
Fax: 304-872-3359 • sales@uscarburetion.com
www.propane-generators.com • Propane fuel conversion spud kit

Leeson Electric Corporation, PO Box 241, Grafton, WI 53024 • 262-377-8810 • Fax: 262-377-9025
leeson@leeson.com • www.leeson.com • Motors

Scott Motor Company, 2401 S. Virginia St., Reno, NV
 89502 • 888-550-0270 or 775-332-4000
 Fax: 775-332-4005 • info@scottmotors.com
 www.scottmotors.com • Motors

W. W. Grainger, Inc., 100 Grainger Parkway, Lake
 Forest, IL 60045 • 847-535-1000
 postoffice@grainger.com • www.grainger.com
 Dayton motors

McMaster-Carr Supply Company, Inc., PO Box 740100,
 Atlanta, GA 30374 • 404-346-7000 • Fax: 404-349-9091
 atl.sales@mcmaster.com • www.mcmaster.com
 Various relays, pulleys, sprockets, and other assorted
 machine-building supplies

Lennox Air Conditioning, PO Box 799900, Dallas, TX
 75379 • 800-9-LENNOX or 972-497-5000
 Fax: 972-497-5331 • www.lennox.com • Mini-split
 ductless air conditioners

Backwoods Solar Electric Systems, 1395-HP Rolling
 Thunder Ridge, Sandpoint, ID 83864 • 208-263-4290
 Fax: 888-263-4290 • info@backwoodssolar.com
 www.backwoodssolar.com • Siemens PV module for
 solar cooler, SolPan load center, and CFs

Marlin P. Jones & Assoc., Inc., PO Box 12685, Lake
 Park, FL 33403 • 800-652-6733 or 561-848-8236
 Fax: 800-432-9937 • mpja@mpja.com • www.mpja.com
 Thermoelectric cooling module, muffin fan, heat sink



“HANZI” Chinese Diesel

China Diesel Generators

Water Cooling, Electric Start, 1800 rpm, 115V / 230V, 60 Hz,
 One Year Warranty. Free Parts Kit & Tools.



3 kw	\$1575
7.5 kw	\$2795
10 kw	\$2995
15 kw	\$4295

Immediate Delivery.
 All China Diesel engine parts
 available.

China Diesel Tractors

4-Wheel Drive, Power Steering, Roll Bar, Double Stage Clutch,
 & Front Loader.



25 HP, 30 HP, & 50 HP.
 Options: Front Loader
 Backhoe, Cab Turf Tires,
 & Implements.

Call now to place your order, or for more information

Newinli International, Inc.

1424 Arrow Hwy., Irwindale, CA 91706

Toll Free: 1-877-NEWINLI (1-877-639-4654)

Phone: (626) 357-9895 • Fax: (626) 357-9916

Web: www.dieselequip.com

Email: newinli@aol.com

Dealer Inquiries Welcome.

BATTERY CABINETS

ROOF & GROUND MOUNTS

TOP-OF-POLE MOUNTS

BATTERY BOXES

**CALL ABOUT OUR
 FLUSH-TO-ROOF
 COMPONENTS**

- Power Posts™
- Easy Feet™
- Power Clamps™
- Power Rails™

4000-B Vassar Dr NE • Albuquerque, NM 87107 • **800-260-3792** • Fax 505-889-3548 • Email jrandall@directpower.com

Who Are You Going To Call When The Lights Go Out?

(Guess who already did!)

SOLARTECH 3000

Offering products from...



Siemens Solar



And many others.



SOLAR NEWS | EDUCATION | PRODUCTS

Back-up Power Systems — Starting at \$1599

These complete turnkey modular critical load systems are designed for easy installation and will provide basic services from any where for a few hours to several days, depending on the system.

Residential Solar Electric Systems — Starting at \$4200

SolarTech 3000 specializes in prepackaged Solar Electric Systems for all power applications, especially residential power systems for Stand-Alone 'off-grid' homes and Utility-Interactive systems for 'grid-tie' dwellings or buildings.

We have packaged two each of the most typical system configurations in each category, however, systems requiring larger power requirements or other system components can be provided. Please call us at 877-246-8217 and we will be happy to assist you to configure a system to suit your needs. You will also find useful worksheets (under education) on our website to help you gather necessary information for configuring your system.

We also provide a large variety of other useful alternative energy products to help you through energy shortages — Solar recharged flashlights and lanterns, solar/human powered radios, solar powered PowerPaks and battery chargers.

All of this is available on our searchable, easy to navigate website. However, if you don't find what you're looking for, please call us and we'll assist you any way we can!

For these items and other residential and commercial solar equipment
Go to: <https://www.SolarTech3000.com> or call: 877.246.8217



Time was when only hippies
and astronauts used solar power.

The world is finally catching up.

Today, making your own power and
being self-reliant is mainstream thinking.

Energy Outfitters has created a new class of products
we call Rpower™ – home energy appliances.

And every home will have one.

Rpower
By Energy Outfitters Ltd

543 Northeast "E" St ▪ Grants Pass, Oregon 97526
800 GO SOLAR ▪ 800 467 6527 ▪ www.rpower.com

AIR-X

**THE REVOLUTIONARY NEW
GENERATION AIR**



AIR-X. It's not just another improvement in a wind turbine, it's an evolution in wind turbine design. The AIR-X is the first micro-processor controlled small wind turbine. In fact, the AIR-X is so smart it continuously adjusts the alternator to maximize performance and minimize noise.

LOWER STARTUP: AIR-X incorporates "peak power tracking" which allows it to begin producing electricity at half the RPM of the AIR 403 meaning more energy for your batteries.

GREATER OUTPUT: AIR-X's controller delivers maximum power to the battery by continuously adjusting the alternator loading to maximize alternator and blade efficiency. This ensures the highest possible output at all wind speeds and at all states of battery charge.

SMART CHARGE: It's not just another charge controller. As the battery approaches charge state, the AIR-X's controller will momentarily stop charging to accurately sense battery voltage. Charging stops automatically when the batteries reach the set point.

QUIET OPERATION: No more flutter control in high winds. One of the most amazing features of the AIR-X is its ability to control RPM to prevent blade flutter in high winds. This feature allows the AIR-X to operate quietly in virtually all wind speeds.




Southwest Windpower

Renewable Energy Made Simple

2131 N. First Street • Flagstaff, Arizona 86004 USA
Tel 520-779-9463 • Fax 520-779-1485
www.windenergy.com • E-mail info@windenergy.com

WORK FOR PEACE

Simon's Eclectic, Evolving, Electrical System

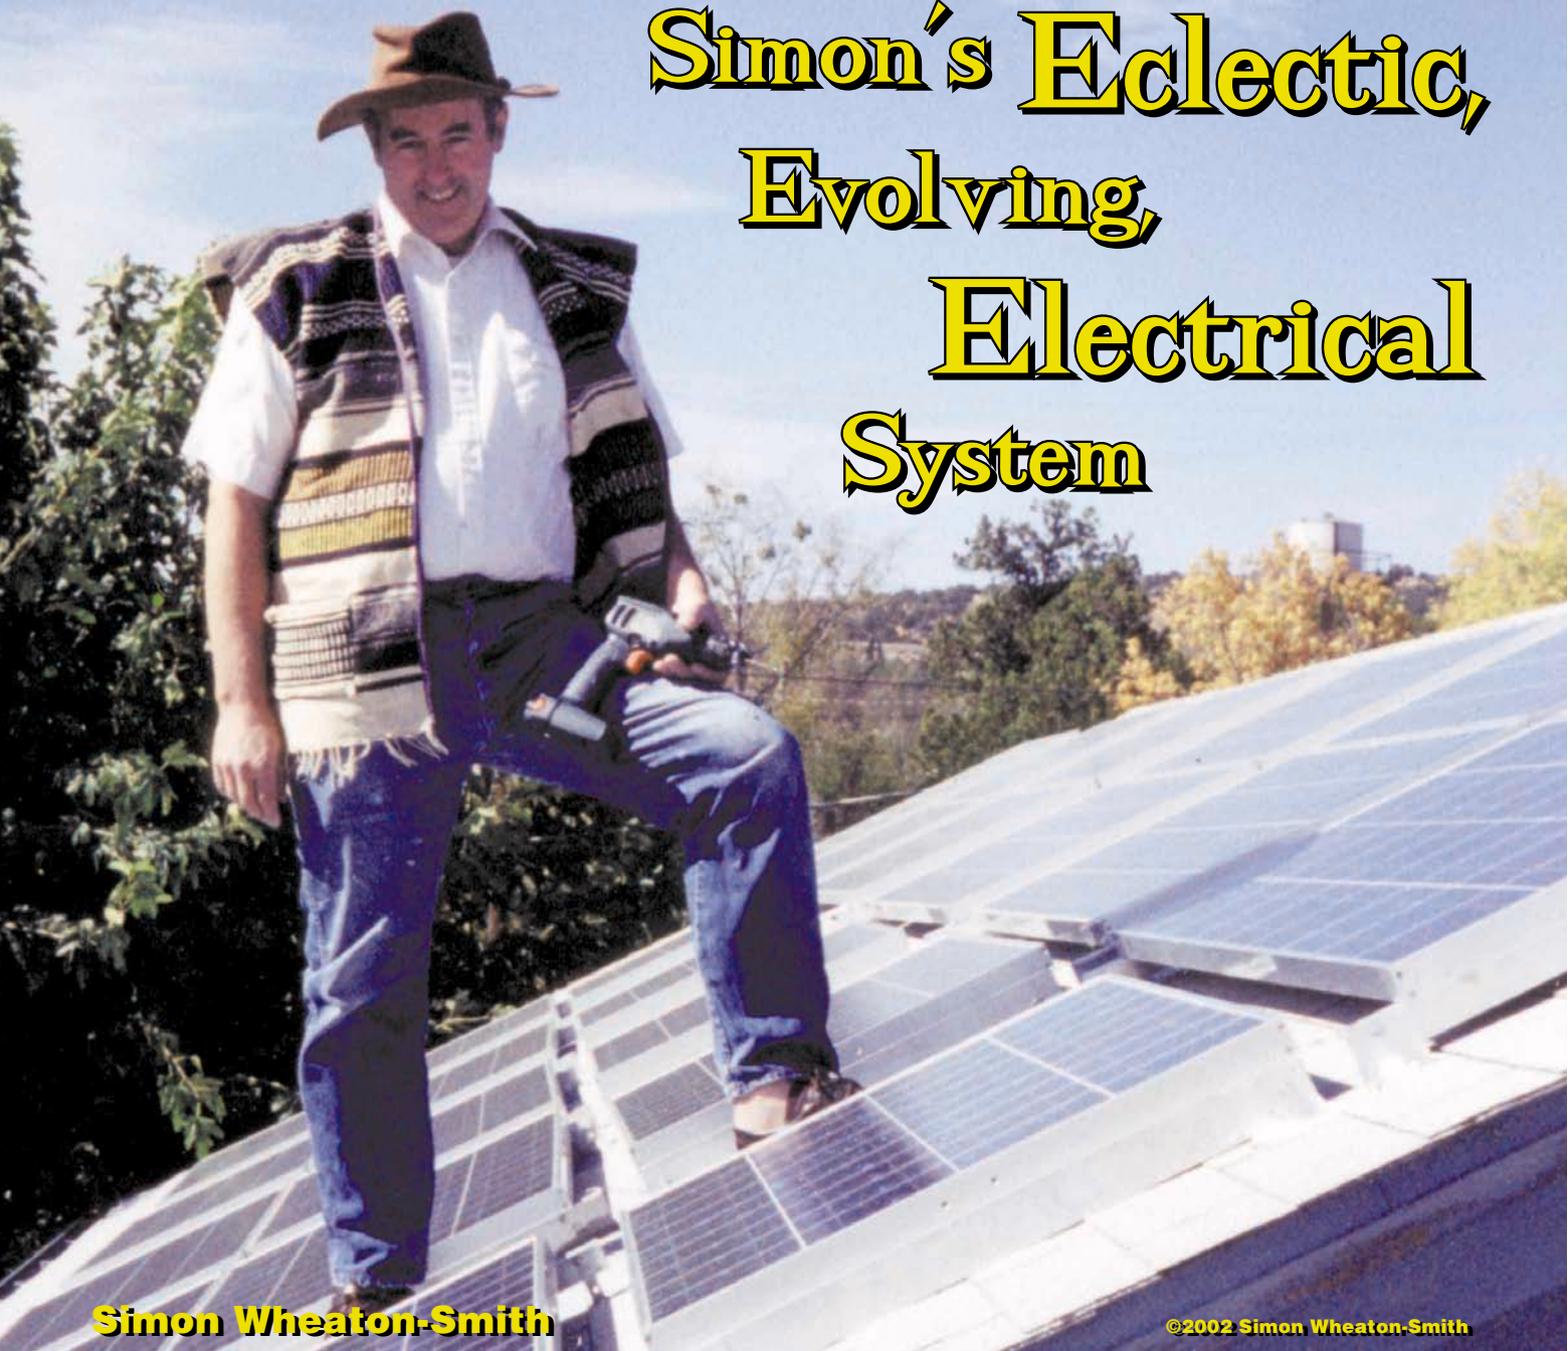

Simon Wheaton-Smith

©2002 Simon Wheaton-Smith

Simon Wheaton-Smith checks the mounts on his system's PVs.

He started his system with gear he found at a local junk store: three Kyocera panels and a Trace inverter.

I dabbled with solar hot water back in the early '70s, and it worked. I often thought about solar electricity, but decided it was too expensive. Then in early November 2000, the leaves were still green, and it snowed. Down came the branches, and next the utility lines. Amid the arcing of shorted grid wires, out went all the lights.

My 1880 house has adobe interior walls, so the heat was retained. I have hydronic heating using natural gas, but my wonderful gas boiler has a tiny little pump. It draws about 115 watts when running, but with no grid, there was no heat. Slowly the house started to cool as the hours ticked away. My three nonelectric gas heaters were fired up, and life continued. But I was determined that this was not going to happen again.

A UPS Is in Order

My solution was a UPS (uninterruptible power supply). I got the biggest and best, and the tiny little pump exhausted the UPS' small battery in a short time. "No

problem,” I said, thinking of *Home Improvement’s* bumbling Tim the Toolman, “I will build my own.”

So I got a cheap battery and a small Maxwatt 400 watt inverter, and looked for a charger. I educated myself on battery technology and charging methods. And, lo and behold, I found three Kyocera 80 watt panels in the local junk store, as well as a Trace Tiger TS512 inverter. I thought I was in business, but it was only the calm before the storm.

Modified Watt Wave?

My earlier system expanded to several Trojan T-105 batteries, a Trace C30A+ charge controller, and a Trace DR1512 inverter to power my chest freezer. The TS512 ran the security lights. Everything was running on modified square wave. I added a couple of Kyocera 120 watt panels, followed by two more.

It was at this point that I learned that my security motion detector would burn up when presented with a modified square wave from the Trace TS512 inverter. The chest freezer ran fine when the batteries were full. But as the source DC voltage got lower, the Trace DR1512 inverter wave was indigestible to my chest freezer, and it shut down. Compared to sine wave inverters, the AC output voltage of most modified square wave inverters is not as precisely regulated. So as the battery voltage drops, so does the voltage of the inverter’s AC output.

Was Darwin Right?

Before you get the impression that I can’t plan my way out of a paper bag, and know nothing about electricity, perhaps you need to learn a little about me. I got my first amateur radio license in 1962 (G3ROW), and later an American one (WB7ULT), and was a brass pounder (morse code operator) in the Royal Naval Reserves. While I was encouraged to complete my degree in special physics elsewhere than the college in which I was enrolled, I am not without forward-thinking skills. My masters is in computer science, and

I have spent thousands of hours planning systems and the like.

I switched careers about twenty years ago and flew freight Merlins and Falcons, and finally B737s for one of the top ten airlines. After that, I became an inspector for a federal agency charged with air transportation certification and surveillance. I can’t mention their three-letter name, since they think I am a bit of a maverick.

I have spent so many years planning things to the nth degree that I decided, “To hell with all that, let’s build a solar-electric system.” This is a system that proved Darwin was right—it evolved. And that took bucks—the dear kind of bucks, not the deer ones.

Conservation

I went through load measurements with a Watts up? meter, and that convinced me to switch to compact fluorescents. I also eliminated many phantom loads, such as the satellite TV receiver, VCR, several televisions, and so on.

I added external insulation to some adobe walls, triple glazed windows, and crawlspace insulation. Clothes drying is now done on a clothesline just like when I was a kid, and a crockpot works well for stews. I have a solar oven, but it doesn’t do all I would like it to do. I might use its baked bread for building blocks or solid insulation, I suppose.

I have also installed a solar air heater for the offices in the garage, and will be converting to diversion loads to use excess collectable solar electricity. The diversion load will probably either heat batteries if needed, or supplement the gas water heater.


PVs & Inverters Galore

I now have sixteen Kyocera 120 watt panels, seven Kyocera 80 watt panels, and two Siemens 75 watt

The Weil-McLain furnace with its little pump.



Part of the system's power wall, including Trace C40 and C60 charge controllers, instrumentation, and overcurrent protection.

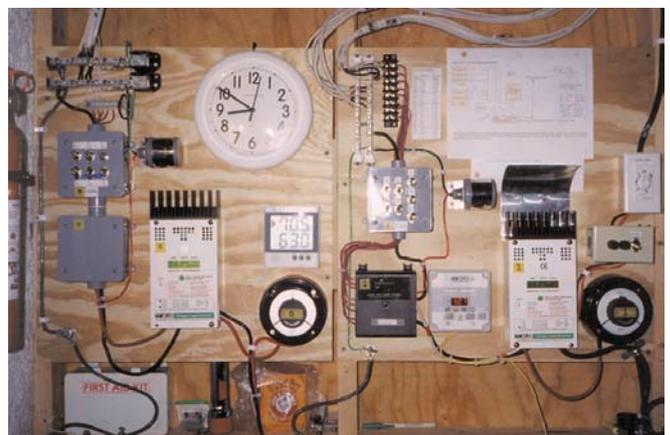



Eighteen Trojan T-105s make up this battery bank. The battery system is insulated, fused, and vented.



Three of the twelve Roll's batteries. The #4 (21 mm²) wiring shown is from the C60 controllers.

panels. Total rated PV output is 2,630 watts. PV manufacturers rate module output using an operating temperature of 25°C (77°F). But PVs often operate at temperatures closer to 50°C (122°F). And PV output drops as module temperature increases. Realistic PV output is usually about 85 percent of the manufacturer's rated output on a yearly average, or 2,200 watts in my case.

The PVs are regulated by four charge controllers. A Trace C40 handles 320 watts, two C60s handle 720 watts each, and the last C60 handles 870 watts. The C40 and a C60 regulate the charge to eighteen Trojan T-105 batteries, 2,025 amp-hours at 12 volts. These subarrays total 1,040 rated watts, and the remaining subarrays total 1,590 rated watts and charge twelve Roll's 4KS21PS batteries.

The T-105 system runs a PROsine 1,000 watt inverter for the chest freezer, which is happy now that it has a sine wave. The Trace DR1512 inverter runs the well and pressure pump, and shop tools. They are OK with the modified square wave.



The Trojan system's inverters: XP600/12, PROsine 1,000 watt, and DR1512.

The 4 volt Roll's batteries are wired three in series for 12 volts, and four sets in parallel for 4,400 amp-hours. They run an Exeltech XP600/12 true sine wave inverter, which powers the boiler pump, security lights, and some frequently used house lights. A PROsine 1800 sine wave inverter is backup, and a Trace PS2512 inverter runs the fridge, microwave, toaster, and the rest of the house lights. The batteries all have Hydrocaps to recombine gasses, and there is an exhaust fan powered by the Trace PS2512 inverter auxiliary relay.


One of the 720 watt C60 charge controllers can be switched between the Roll's and the Trojans. The inverters have excess capacity so they can back each other up.

In short, this is a system with significant reserve capacity and redundancy. It's also designed to be easily reconfigurable. I would love to say I designed it from scratch that way. I didn't—it just grew and grew. And it still is growing.

The Roll's C60 system with PROsine 1,800 watt and Trace PS2512 (off to right) inverters.

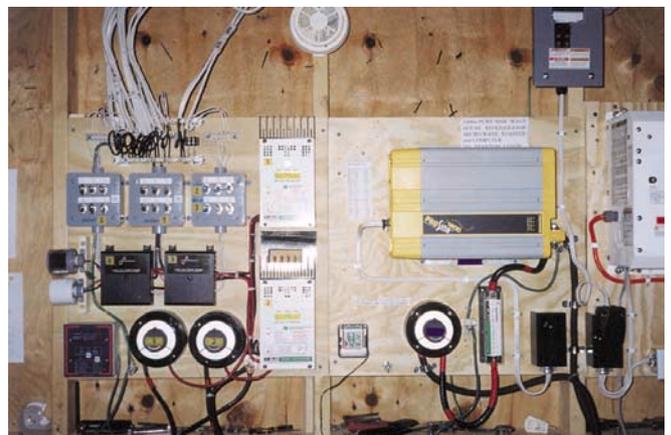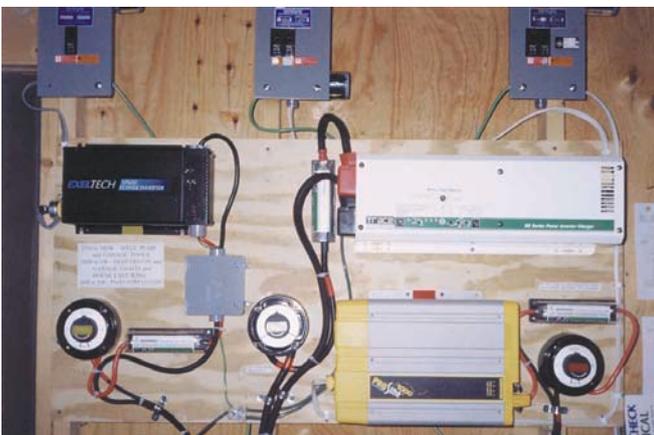

Simon's Evolving PV System

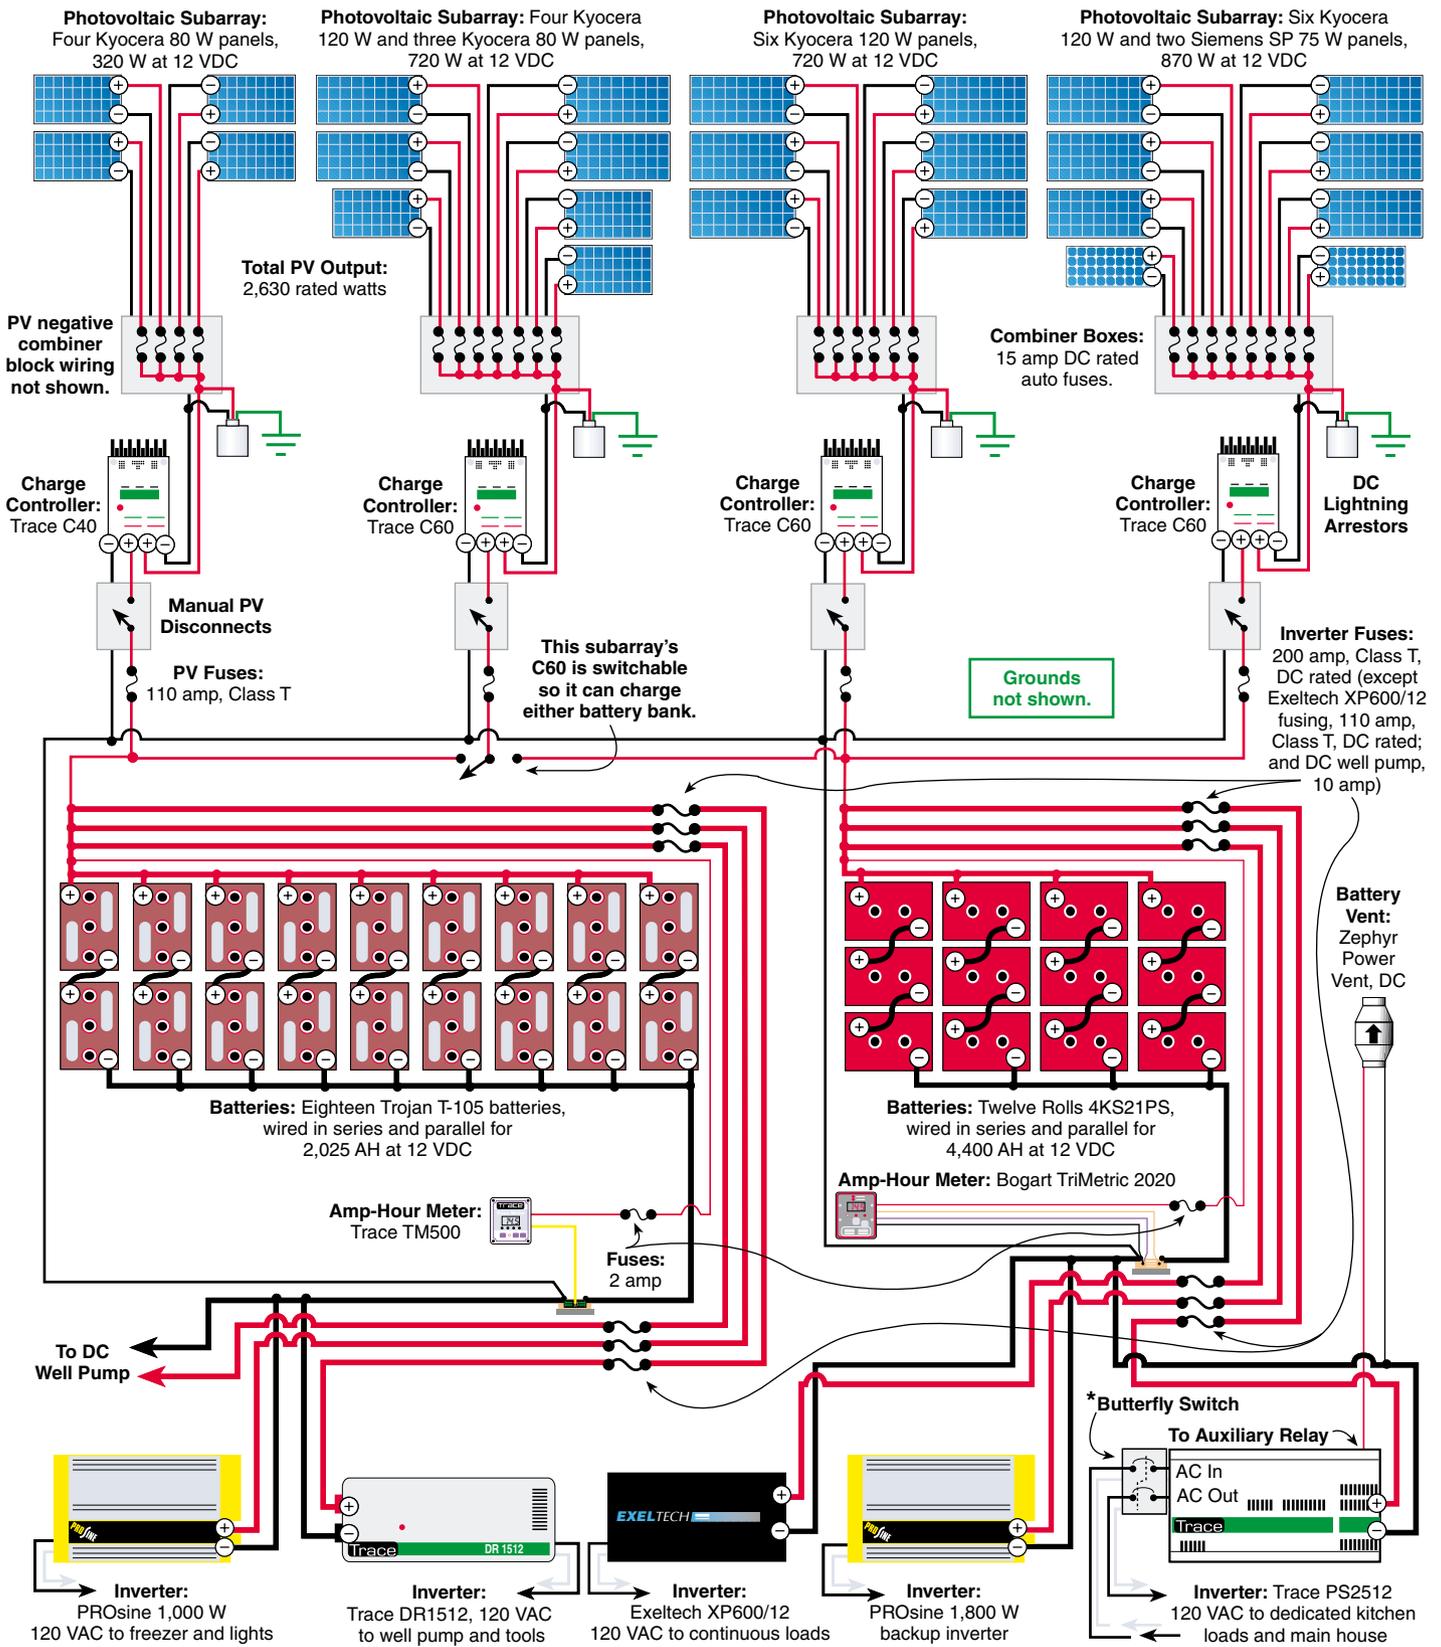

* AC input from the utility grid allows the Trace PS2512 to charge the Rolls battery bank. The butterfly switch assures that the grid is only used for battery charging. This system isn't utility-interfied.

My Friend Has a Bass Fishing Boat

And US\$30,000 later, it is a system fully charged by solar noon, running 75 to 90 percent of my electric usage. My last grid bill was US\$9.37.

What does this have to do with bass fishing? One of my colleagues asked me how I could justify this system with its switches, gadgets, meters, flashing lights, and redundancy? I knew he had just bought a bass fishing boat. So I asked him what it cost.

“\$21,000,” he said.

“And how many bass have you eaten?”

“Seven fish,” he said.

“So,” I said, “you are running \$3,000 per fish.”

To be honest, my solar-electric system is more of a hobby that runs the house, and not a cost-effective operation. However, my early unused purchases were sold as surplus to others also doing their solar thing, so my learning curve wasn't too costly.

Net Metering

While my state allows net metering, our utility company chooses to require separate meters for buying and selling, and that creates problems. They like to charge for their transmission lines, and they pay almost nothing for electricity produced by intertied systems. So while I am equipped to sell back, I am choosing instead to use all of my surplus that I can. Being fully charged by solar noon, and with very few cloudy days, I have excess to use. I am working on it.

My batteries can go five days with no sun, and three is the normal worst case here. Even when slightly overcast, I still get about 20 percent of the rated output from the PV panels.

The Trace PS2512 inverter, the AC-in breakers and isolation box. A PV amp-hour log is kept on the clipboard.



Wheaton-Smith Systems Costs

<i>Items</i>	<i>Cost (US\$)</i>
16 Kyocera KC120-1 120 W modules	\$8,720
12 Rolls 4KS21PS batteries, 4,400 AH at 12 V	6,600
7 Kyocera KC80 80 W modules	2,723
Trace PS2512 inverter & SWRC	1,825
PROsine 1800 inverter	1,015
18 Trojan T-105 batteries, 2,025 AH at 12 V	1,008
Miscellaneous wire & hardware	1,000
Trace DR1512 inverter	800
2 Siemens SP75 75 W modules	700
78 Hydrocaps	624
PROsine 1000 inverter	600
Exeltech XP600/12 inverter	570
3 Trace C60 charge controllers	555
4 Trace C-series digital displays	316
Trace TM500 meter	200
Bogart TriMetric 2020 meter	190
Trace C40 charge controller	149
<i>Total (plus shipping & handling)</i>	\$27,595

My Safety Systems

I have fire extinguishers for electrical fires at all doors to the garage, which is where this Frankenstein laboratory is. Other safety equipment includes baking soda, bottles of distilled water, eye goggles, first aid kits, and a smoke alarm.

A 12 volt, low wattage fan sucks air through a 1-1/2 inch (38 mm) duct from the two battery banks, which are in separate boxes insulated with two layers of R-19 fiberglass insulation. All connections are coated with a battery corrosion preventative spray. In addition, each cell has a Hydrocap.

Each positive inverter cable has a Class T fuse located in the battery box for overcurrent protection. Then #2/0 (67 mm²) and #4 (21 mm²) wire exits to cable quick-disconnects, bolted disconnect switches, and other fuse systems. There is a common ground bus bar, and all equipment grounds are terminated at that bus. The bus is in turn connected to buried ground rods. The battery negatives are also common; only the positives of each battery bank are isolated.

Lightning arrestors are installed in the PV output circuits before they go to their charge controllers, and each panel is individually fused. All AC systems, of which there are four, have lightning protection as well.

Measurements & Code

One of the measurements I'm really interested in is how many DC watt-hours the PVs are producing. So I



From three panels to twenty-five—the system keeps growing, and growing, and growing! The sixteen KY120, seven KY80 and two SP75 PV panels.

decided to purchase Trace's digital AH displays for each charge controller. At 8 AM every Sunday, I log the amp-hours each of the four subarrays has produced. Multiplying the total AH figure by 12.5 volts gives me the estimated collected watt-hours for the past week.

I also have a Trace TM500 amp-hour meter for monitoring the Trojan battery bank, and a Bogart TriMetric 2020 amp-hour meter for monitoring the Rolls bank. These meters compare incoming amp-hours from the PVs to amp-hours being consumed by the loads. Amp-hour meters are the most accurate and convenient way to keep track of the state of charge (SOC) of each battery bank.

Well, this is purely an experimental, evolving system. Having said that, some things are not code compliant. The positives coming in from the panels are not in conduit. And they are white wire with red tape, and black is negative. Having held two country's amateur radio licenses for forty years, I am used to that wiring convention.

For the most part, this system is code compliant, if not pretty. While it runs itself, if I ever sell the house, there will be a lot of training.

System Details

Beginning at the far east end of the garage is my 320 watt system of four Kyocera 80 watt panels. The panels are fused individually. PV output is routed through DC rated automotive fuses and then paralleled up at a combiner block. A lightning arrestor is also installed at

the combiner block. From there the combined juice goes to a C40, and then to a switch and to the Trojan batteries.

The next subarray is 720 watts—three Kyocera 80 watt panels and four Kyocera 120 watt panels, controlled by a Trace C60. These two PV systems go to a bank of eighteen Trojan T-105 batteries with Hydrocaps. Covering the batteries are sheets of Plexiglas, so that if I drop a wrench on them, there is no nuclear meltdown.

This battery bank powers the Trace DR1512 modified square wave inverter and the PROsine 1,000 watt true sine wave inverter. Each inverter powers a separate breaker box.

The next system, continuing west along the garage is the Rolls 4KS21PS battery bank, its PV array,

and its inverters. These batteries use two C60 controllers, and two subarrays. One is for six Kyocera 120 watt panels, the other has six of the same panels as well as two Siemens SP75 panels. These collect a rated 720 watts and 870 watts, respectively. The ratios of PV output and the battery amp-hour capacities of the systems match the daily inverter usage.

Inconspicuous PVs

And where are the panels? They are on the garage roof at a roof pitch of 20 degrees. This is not efficient, but I wanted the system to be pleasing to the eye. The panels were not a significant roof load. But where the bolts didn't meet solid wood beams, I attached braces to reduce wind lifting problems.

Just in case of another sort of "lifting" problem, I added an alarm system to protect the solar panels from sprouting wings. I have a continuous loop of stranded insulated wire going through at least one unused mounting hole in each panel. That closed loop goes to the normally-closed input of an old Radio Shack alarm controller, powered by the Rolls batteries.

I used the roof angle of 20 degrees for the PV arrays. Afterwards, a friend asked me if I would have sun in the winter, given the fact that the house is south of my garage roof, which has the PV arrays, and the fact that there are three large trees. My heart sank—actually stopped would be a better description.

With my solar powered computer, I went to <http://mach.usno.navy.mil>, which gave me azimuth and

Wheaton-Smith Critical Loads

Item	Phantom Watts	Normal Watts	Peak Watts	KWH per Day
Sears fridge		140	450	1.78
Chest freezer		130	130	1.12
Furnace pump	7	115	115	0.59
CF lights		25	25	0.25
Well pump		910	1,050	0.14
Security light	5	5	150	0.10
Microwave	10	1,200	1,200	0.10
Toaster		1,000	1,000	0.10
Pressure pump		360	310	*
<i>Total</i>				4.17
<i>Total Weekly</i>				29.19

*Pump only runs one minute per week.

zenith settings for any day of the year at any city. Wisely selecting my own city, I got the azimuth and zenith figures, and made a cardboard model. With a compass adjusted for magnetic variation, I found that I had a clear solar path in the winter. My heart resumed normal function.

In doing this project, I have had *no* assistance from engineers or electricians. This has been designed, built, fixed, rebuilt, modified, and installed, tested, repaired, and monitored by me.

Runs Itself

What is the system like to live with? It runs itself. I can leave it alone and it does just fine. But I like to sit and watch the flashing lights and hear the inverters hum, like the buzzing bees of summer. Nothing has failed yet, but if it does, it is very easy to reconfigure while failed items are repaired.

The AC systems use their own wiring in the house, and each is color coded. The yellow system is the Exeltech XP600/12 inverter—only plugs with yellow tape can go there. The PROsine 1000 system has red wall sockets, and only plugs with red tape can go there. Similarly with the Trace PS2512 or PROsine 1800, which run the blue system. The Trace DR1512 is the white system, similarly marked. Some plugs have several color bands, meaning they can go to different inverters.

The color coding for plugs is based on whether they need continuous power (from the XP600/12 inverter), the type of wave they can accept, and the net aggregate load for that inverter.

Critical Loads

Home Power likes to have a table of loads for system articles. That's fine if you actually planned anything. I

didn't. So I grabbed my Watts up? meter and confirmed the loads after the fact. The figures from this meter were about what my TM500 and TriMetric 2020 meters implied.

The daily KWH column adds up to 4.17 KWH a day, although I actually run below that. My most recent weekly statistics showed I used a total of 27.0 KWH (11.7 + 15.3), and the deduced depth of discharge matches my daily low voltage at rest readings. While it may appear that I use more KWH from the batteries than I put in, that is because I use 12.5 volts to derive KWH. In reality, the collection voltage is above 12.5, and the nightly load voltages are less.

The 11.7 figure above is the KWH usage from the Trojan T-105 battery system, and the 15.3 figure is the KWH usage from the Rolls battery system. The Trojans are being charged by the 320 watt array, controlled by the C40, and the 720 watt array, controlled by the C60. The Rolls batteries are charged by the 720 and 870 watt arrays via the remaining two C60s.

The daily load usages were measured over several weeks to get good daily averages. The 1,000 watt well pump when running has such a high surge load that the sun seems to grow dimmer as my well pump starts up!

The microwave from Wal-Mart said it was 650 watts, which was why I bought it. But it draws about 1,200 watts. The microwave doesn't trigger the inverter, so it is on a distribution switch with a lamp that will load the inverter out of search into running mode.

My grid usage runs around 12.8 KWH a week, and is reflected in my monthly electricity company bill. I will be running the entire house off the system when I get my transfer switch installed at the main panel, and will only use the grid for the electric oven and the clothes dryer if needed.

The author's first try at the house's east wing monitoring and distribution panel—before he added conduit.



Utility Costs & Usage

Date	Cost (US\$)	KWH Used
02/27/01	116.31	974
03/01/01	97.27	785
04/28/01	64.95	515
05/28/01	47.58	376
06/04/01	39.83	311
07/04/01	32.08	246
08/12/01	19.90	135
09/07/01	12.41	71
10/01/01	11.40	63

I eliminated phantom loads, use high-efficiency appliances and lights and a clothes drying line, and got lucky buying a Sears fridge that is fairly energy efficient. My annual grid usage has dropped significantly. March and April saw the chest freezer go off the grid, May and June the fridge, with the microwave and toaster following in July. I was running one resistive heater that I replaced with gas, and the insulation and multiple glazing reduced those loads.


Good Things, Bad Things

There are always things that could have been better. Cheaper combiner boxes that meet code would be nice, because mine are auto fuse systems. I wish the PROsine and Trace inverters had DC insulating caps for their inverters that would go around most common DC lugs.

I would like it if Statpower and Trace would respond to e-mail in the same century that I e-mailed them. Having said that, while Statpower has not been helpful over the phone, Trace has been excellent, which is strange since they are both owned by Xantrex.

Sunelco was excellent in handling door-to-door Rolls battery deliveries. No one else would do door-to-door with a truck with a lift-gate. I used a 4,000 pound (1,800 kg) capacity engine hoist costing US\$190 to move the batteries, and that same hoist lifted the Trace PS2512 to a table. I have a ceiling winch to lift the PS2512 and its wall mount panel up to the wall for fastening.

All this equipment works very well. The Exeltech XP600/12 had a problem with the remote on/off switch, and Exeltech was excellent both via e-mail and phone. I bought the Exeltech XP600/12 from RMS Electric in Boulder, Colorado, and they were very helpful. The Rolls battery people were also helpful over the phone and by e-mail on battery specs, settings, and other refinement issues.

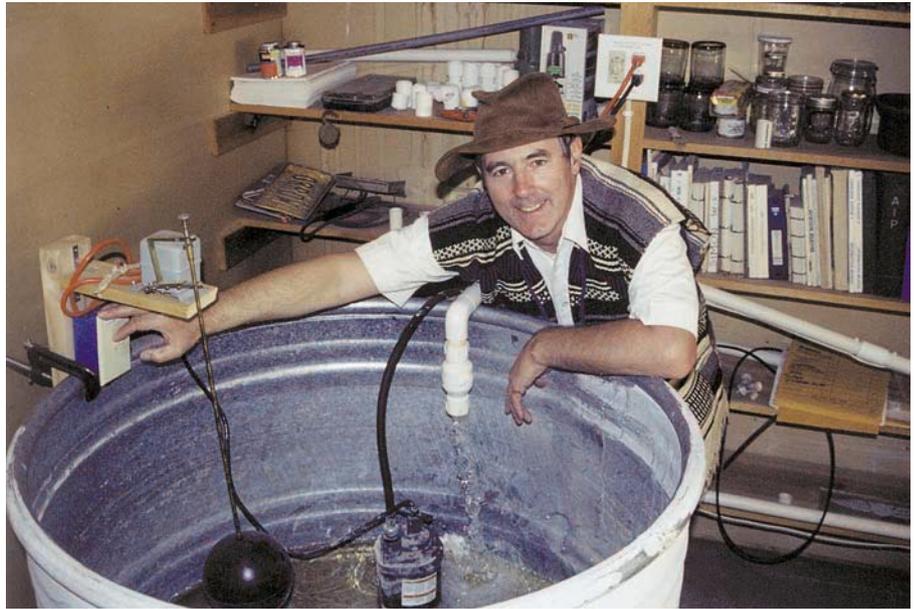

**The AC well pump moves water to this tank.
A sump pump pressurizes the irrigation water for distribution.**

Before getting the Trace PS2512 from Earth Solar, I got a PROsine 3000 inverter. It wouldn't run right out of the box; it kept going to "power down." When I found a sequence of keys to hit within five seconds to stop that, it ran fine for twelve hours when for no reason it again went to "power down." In this state, nothing will wake it up except resetting the inverter. No faults were shown and temperatures were normal.

My e-mails to Statpower, which makes the PROsine 3000, were never answered. One phone call was of no help, the rest were never returned. I later found that the PROsine 3000 burns 60 watts of overhead, the Trace PS2512 only draws 20. This is something the marketing specs didn't highlight. Earth Solar was very helpful here.

Cake with Icing

I love seeing the lights flash, hearing the inverters hum, and eating solar powered, microwaved beef stew on toast from a solar powered toaster, washed down by cold lemonade chilled by a solar powered fridge, relaxing under solar powered patio lights, while enjoying reading my most recent utility bill of US\$9.37. Knowing that it all works, is safe, and doing its bit to keep the air clean, that's the icing on the cake!

Access

Simon Wheaton-Smith, 3434 North 11th St., Suite 3, Phoenix, AZ 85014 • sam_in_silver@yahoo.com

SOLutions in Solar Electricity, Joel Davidson, PO Box 5089, Culver City, CA 90231 • 310-202-7882
Fax: 310-202-1399 • solar@solarsolar.com
www.solarsolar.com • PV modules

PV System

RMS Electric, 1844 55th St., Boulder, CO 80301
800-767-5909 or 303-444-5909 • Fax: 303-444-1615
info@rmse.com • www.rmse.com/solar.htm • Inverters

Exeltech, 2225 East Loop 820 North, Fort Worth, TX
76118 • 800-886-4683 or 817-595-4969
Fax: 817-595-1290 • info@exeltech.com
www.exeltech.com • Inverter technical support

Sunelco, The Sun Electric Company, PO Box 787,
Hamilton, MT 59840 • 800-338-6844 or 406-363-6924
Fax: 406-363-6046 • tbishop@kyocerasolar.com
www.sunelco.com • Rolls batteries, Xantrex products,
Kyocera modules, disconnect switches, battery cables.

Earth Solar, 4504 S. Georgia, Amarillo, TX 79110
800-329-3283 or 806-359-9005 • Fax: 806-355-0585
contact@earthsolar.com • www.earthsolar.com
Trace inverter

Xantrex Technology Inc., Distributed Residential and
Commercial Markets, 5916 195th St. NE, Arlington, WA
98223 • 360-435-8826 • Fax: 360-435-2229
inverters@traceengineering.com • www.xantrex.com

Statpower Technologies Partnership, 7725 Lougheed
Highway, Burnaby, BC, Canada, V5A 4V8
604-420-1585 • Fax: 604-420-1591
sales@statpower.com • www.statpower.com
PROsine inverter

GOTSOLAR.COM

Everything you need under the Sun!

GotSolar.com brings you the **BEST** equipment, at the **BEST** price!

Stop by our web store
www.gotsolar.com
Email: sales@gotsolar.com
Phone: 541-412-7276



Serving Customers Around the World Since 1979

FEATURING: Kyocera's advanced cell-processing technology and automated production facilities have produced a highly efficient multicrystal photovoltaic module. The conversion efficient of the Kyocera Model KC120-1 solar cell is 14%. These cells are encapsulated between a tempered glass cover and an EVA pottant with PVF back sheet to provide maximum protection from the severest environmental conditions. The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation. All Kyocera Solar panels come with a 25 year warranty.

KC-120 Solar panel \$540.00*
KC-80 Solar panel \$374.00*

KC-60 Solar Panel \$295.00*
KC-50 Solar Panel \$275.00*

KC-40 Solar Panel \$239.00*
KC-35 Solar Panel \$209.00*

Call us to help you design a system that will meet your current and future electrical needs. We have over 20 years of experience in design and installation, ranging from remote homes, RV's, utility tie, battery backup, telecommunications, and cathodic protection applications. Let us help you with your technical questions and designing concerns. Or give us a call for a system quote.

See our online store at www.solar-electric.com and our technical info website at www.windsun.com

2725 E Lakin Drive, Flagstaff AZ 86004 – 800-383-0195, 928-526-8017, FAX: 928-527-0729

Exclusive Authorized Dealership Program

It's business...but not as usual.

Advanced Energy Group

There's no other dealership program like it.

Full Industry Product Line – Comprehensive Expert Training

Unparalleled Technical Support – Territorial Sales Protection

Optional Commercial Web Site Package

Solar4Power.com

For more information please go to our web site.

A cash investment is required. Serious inquiries only.

**Dealer Inquiries
Welcome**

BERGEY XL.1

1000 Watt Home Wind Turbine

Features

- ▶ 5-Year Warranty (Industry's Longest)
- ▶ Maintenance Free Design
- ▶ Excellent Low Wind Performance
- ▶ Nearly Silent Operation
- ▶ Three High-Strength **PowerFlex** Fiberglass Blades, SH 3045 Airfoil*
- ▶ Neodymium Super-Magnet Alternator
- ▶ **AutoFurl** "No Worry" Storm Protection
- ▶ Fail-Safe Design, No Dump Load Required for Structural Safety
- ▶ **PowerCenter** Multi-function Controller
- ▶ **OptiCharge** Regulation for Extended Battery Life
- ▶ Easy Installation with BWC Tilt-up Towers

*Patent Pending

**24 VDC
Battery Charging**



The all new Bergey XL.1 is the most technically advanced small wind turbine ever. It combines excellent low wind performance and the legendary Bergey ruggedness, at costs well below the lightweights. It comes from the world's leading supplier of small wind turbines and is backed by the longest warranty in the business. The XL.1 delivers on value.

Compare features, performance, price, reputation, and warranties. The new Bergey XL.1 is the clear choice for your home energy system.


\$1,695

BERGEY • DIRECT

WWW.BERGEY.COM

Or, Call Toll Free:
1-866-BERGEYS

Complete AC "Plug
& Play" Systems
from \$2,995

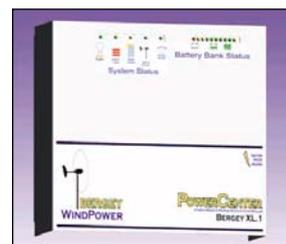

PowerCenter Controller

- 60A Wind Regulator
- 30A Solar Regulator
- 30A Optional Dump Load
- 24 VDC DC Bus
- Battery Status LEDs

Typical Performance: 5.2 kWh DC per day

4 Times More Energy Than the Air 403¹

1.8 Times More Energy Than the Whisper H40²

1—Air is a registered trademark of Southwest Windpower, Inc.

2—Whisper is a registered trademark of Southwest Windpower, Inc.

11.2 mph (5 m/s) Average Wind Speed at Hub Height, Rayleigh Distribution.

Based on manufacturer's published power curves.



SIMPLICITY • RELIABILITY • PERFORMANCE

**2001 PRIESTLEY AVE.
NORMAN, OK 73069
T: 405-364-4212
F: 405-364-2078
SALES@BERGEY.COM
WWW.BERGEY.COM**

SIEMENS

Electrifying Performance

Get the power you need with Siemens Solar

Whether you're just beginning to use solar electricity, or adding to a system, choosing Siemens Solar modules assures you of the exceptional performance, precision quality and proven reliability that have made Siemens a leader in photovoltaic energy.

Our exclusive PowerMax™ technology enables Siemens Solar modules to achieve charging power with very little sunlight. This means your system can operate from earlier to later in the day, generating more useable energy, everyday, from every watt of solar installed.

Your Siemens Solar PowerPro™ Partner has the information, experience and products you need for effective and economical solar power solutions.

Siemens Solar

Tel: 1(877) 360-1789 • siemenssolar.com • P.O.B. 6032, Camarillo, CA 93011-6032



Look For This Logo

Siemens Solar
PowerPro™
PARTNER

Dealer Inquiries Invited

Applied Power
Hitney Solar
Hutton Communications
Inter-Island Solar
Soltek Solar Energy
SunWize Technologies
Talley Communications

Go Configure

Configuring Your PV Array

Joe Schwartz

©2002 Joe Schwartz

One of the most user friendly aspects of photovoltaic (PV) technology is that it's a modular energy source. Individual PV modules can be wired together in different configurations to meet the voltage, current, and power requirements of a specific system.

The big benefit of this modularity is that an increase in energy demand can easily be met with an increase in solar production. This represents a 180 degree shift, both technically and conceptually, from the large, centralized energy sources that provide electricity to most folks' homes and workplaces.

To understand different PV configurations, or how individual PVs can be wired together, you need to have a few principles of basic electricity under your belt. Getting a handle on these concepts is an indispensable step toward designing and installing your own PV system.

Making Sense of Series & Parallel

Many electric components can be wired together in two basic configurations—series and parallel. The PVs and batteries used in renewable energy (RE) systems are typically wired together using a combination of series

and parallel connections between the individual components.


The circuitry in your home appliances also relies on networks of series/parallel connections. And series/parallel configurations are not limited to electricity. For example, the collectors and tanks used in solar thermal (hot water) systems can be plumbed in series or parallel configurations, depending on the application.

Let's take a look at a couple of simple electrical circuits to illustrate the difference between series and parallel configurations. A series configuration places all the components in a single electrical path. So the electrons flowing through a series circuit must pass through each individual component.


Series electrical connections are made by connecting the positive terminal of one component to the negative terminal of another. If we connect the positive terminal of one PV to the negative terminal of another, the output of one module is electrically tied to the output of the other. Like links in a chain, the modules are working in series to charge the battery. See the diagram below, on the left.

A parallel configuration creates multiple paths for the electrons to flow through. Once again, let's use a couple of PVs as an example. A parallel connection between two PV modules can be made by running the positive and negative output wires from each PV to combiner

PVs Wired in Series

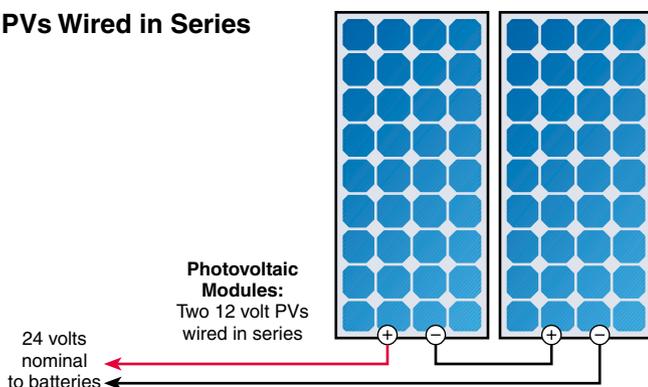

PVs Wired in Parallel

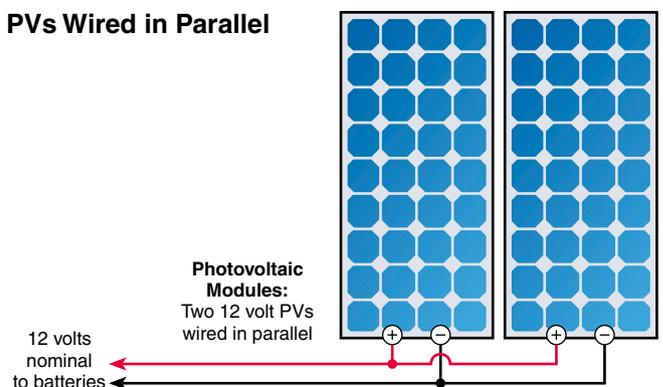

blocks. Here the positive output wires are paralleled or connected together. The negative output wires are also wired in parallel using a combiner block that's electrically isolated from the positive parallel block. See the right-hand diagram on page 36.

The positive and negative output wires from each PV run to the combiner block independently. In this case, the PV panels are working side-by-side, or in parallel, to charge the battery.

If these are new concepts to you, Ian Woofenden wrote some great descriptions of series and parallel circuits in his *Word Power* columns in *HP83* and *HP84*. Check them out.

A Simple Equation

Now that we have a basic, conceptual idea of series and parallel configurations, let's run through a simple equation that allows us to mathematically compare the results of series and parallel electrical configurations. The main thing you want to remember is that in an electrical circuit, a series connection increases voltage and a parallel connection increases current (electron flow rate). If you're a visual learner, hang in there—the illustrations are coming right up!

The power formula defines the relationship between power (watts), voltage, and current (amps). The formula goes like this:

$$P = V \times A, \text{ or}$$

$$V = P \div A, \text{ or}$$

$$A = P \div V$$

Where P is power; V is volts; and A is amps.

In residential electric systems, power is usually measured in watts (W) or kilowatts (KW). A KW equals 1,000 watts. Amps are sometimes abbreviated using an I rather than an A. And voltage is sometimes abbreviated with an E rather than a V. So if you see these abbreviations somewhere, don't let them throw you for a loop!


Again, the main thing you want to remember is that a series connection increases voltage and a parallel connection increases current. If we plug some numbers into the power formula, the relationship between voltage and current becomes pretty clear. If you double the voltage of the system, the current is cut in half, but power remains the same.

$$12 \text{ volts} \times 10 \text{ amps} = 120 \text{ watts}$$

$$24 \text{ volts} \times 5 \text{ amps} = 120 \text{ watts}$$

The power formula demonstrates that with a constant power supply (watts), voltage and current have an inversely proportional relationship—if voltage increases,

Elements of a PV Array

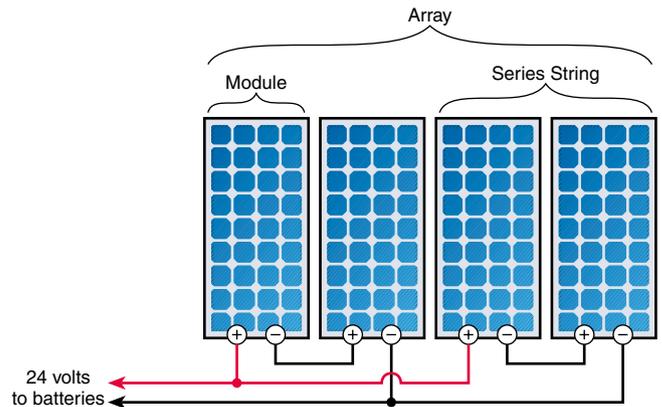

current decreases, and vice versa. The fact that you can make series and parallel connections allows you to specify the voltage and current of your PV system. It gives you some control over the power formula.

Many Pieces, One System

When you're wiring up your PVs, a single PV module represents the building block of the total power source. Once a nominal system voltage is decided on, the PVs can then be wired together to meet your system design parameters.

PVs wired in series with one another are referred to as a series string. The output of each series string is run to a combiner box. In the combiner box, the series strings are paralleled together, and make up what's called a PV array. An array is the largest unit in PV configurations. Large PV arrays can also have a number of subarrays that make up the total array.

PVs for Free!

To better understand common PV configurations, let's imagine that the U.S. government, in a display of true leadership, provided every American man, woman, and child with four PV modules to help foster America's energy independence. When your PVs arrive, you unbox one of them and check out the label on the back of the module. Not only was the government forward thinking on this groundbreaking occasion, but they were also generous. The panels they provided are rated for a 100 watt output, a nominal operating voltage of 12 volts direct current (VDC), and a rated current of 5 amps.

Since you're hip to the power formula, you're probably thinking, "Wait, 5 amps multiplied by 12 volts doesn't equal 100 watts!" Actually, a 12 VDC nominal PV rarely if ever operates at 12 VDC. With few exceptions, it will always be operating at a voltage a little higher than the battery voltage, which in this case ranges from about 12 to 15 VDC. This higher operating voltage enables the PV to fully charge a 12 VDC lead-acid battery bank to 14.2 to 14.8 VDC, depending on battery type.

Combiner Box

The output of individual series strings of PV modules should be run to a combiner box. Using a combiner box results in a code compliant and organized PV wiring network that is easy to troubleshoot and maintain should problems ever arise.

Inside the combiner box, positive and negative bus bars or combiner blocks are used to parallel the output of the individual series strings. Each PV output wire is connected to a dedicated terminal on the bus bars or combiner blocks. This allows for testing of individual series strings. It also allows for the use of overcurrent protection for each series string of PVs.


The *National Electrical Code (NEC)* requires a breaker or fuse in the positive lead of each series string of PV modules for overcurrent protection. These DC-rated breakers and fuses are typically rated at 5 to 20 amps depending on the type of modules you're using. PV manufacturers provide a specific series fuse amperage rating for each of their PV models. The fuse information is typically printed on the label on the back of the module.

Series fusing prevents the possibility of individual series strings of PVs backfeeding another paralleled series string that develops an electrical short circuit. This short circuit could theoretically develop between the string's positive and negative leads, or as a direct short within an individual module.


For years, most PVs were wired without the benefit of series fusing. And the instance of an entire array feeding a shorted series string is rare. However, the *NEC* now requires series fusing in all systems with more than one series string of modules.

Outback Power Systems and Xantrex both manufacture PV combiner boxes. You can also assemble one on your own. For a great tutorial on building your own combiner box, check out Dennis Scanlin's article in *HP78*.

Combiner Box Wiring

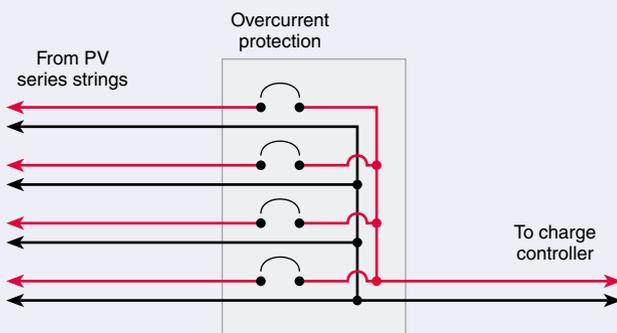

Four PV Modules Wired for 12 Volts

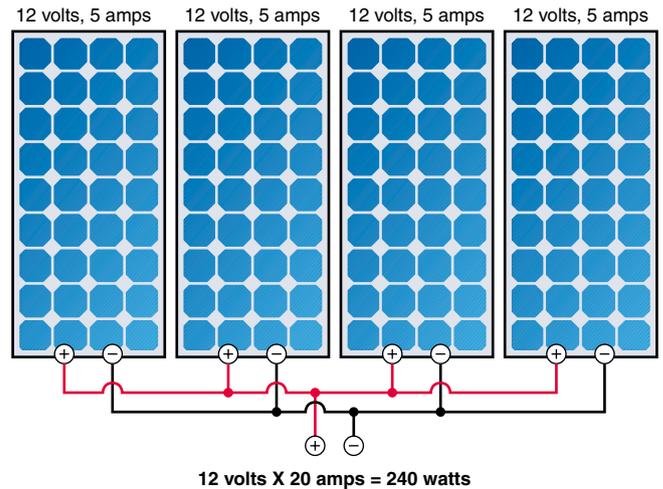

PV modules are factory rated at 25°C (77°F). But normal PV operating temperatures are often twice that, and PV voltage drops off as the operating temperature increases. The higher operating voltage allows some headroom for the voltage drop associated with realistic module operating temperatures.

In the real world, even in a well designed system, a 100 watt PV typically produces about 75 to 90 watts depending on module temperature, battery voltage, wiring losses, and whether a maximum power point tracking (MPPT) charge controller is being used.

So the actual operating current and voltage specifications of a 12 VDC nominal, 100 watt PV would be more like 5.6 amps at 17.7 VDC. But for the following examples, let's keep the mind boggling to a minimum by simplifying the numbers to 5 amps at 12 VDC.


To better illustrate the electron flow, the parallel connections in the following diagrams are shown in the junction or wiring terminal boxes. In the field, parallel PV connections should be made in a combiner box and protected from overcurrent with a series fuse or breaker. The sidebar at left provides an overview of combiner boxes.

Wire 'Em Up!

It's a sunny day outside, and you're feeling patriotic. You want to get your free PVs wired up and making electricity. Armed with a pencil and paper, you use the power formula to compare the output of your four PV modules in different configurations. Before you set to work wiring them up, you want to run the numbers for three different voltages: 12, 24, and 48 VDC nominal.

For starters, you decide to keep it simple and wire all four of your PVs together for a 12 VDC output. You know that each of your PVs operates at 12 VDC nominal, and that you need to wire the PVs in parallel to increase the


Four PV Modules Wired for 24 Volts

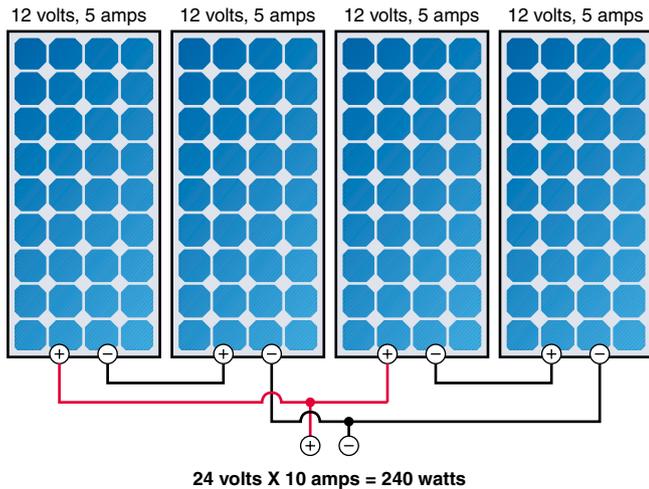

current but keep the voltage at 12 VDC. You sharpen your pencil and bust out some easy math to see how many amps you'll be moving at 12 VDC and how many watts the array will produce.

In a parallel configuration, four 12 VDC PVs, multiplied by 5 amps each, equals 20 amps at 12 VDC. Using the

Four PV Modules Wired for 48 Volts

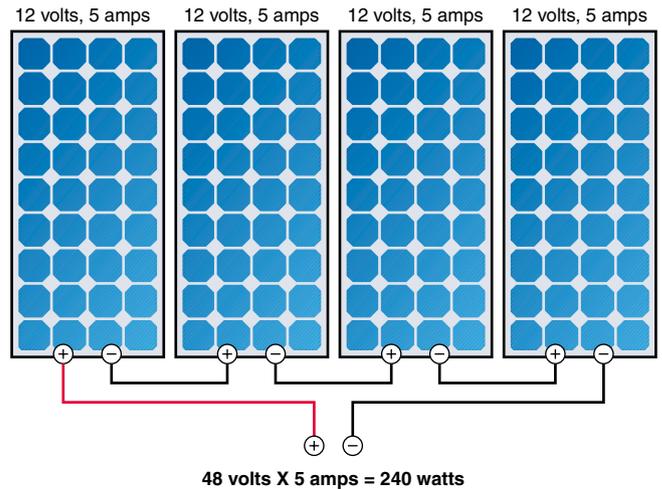

power formula, this 20 amps multiplied by 12 VDC equals 240 watts total.

You're thinking, "Hey this is pretty fun!" and decide to wire your PVs up for 24 VDC nominal. You scratch your head a bit because this is more complicated. Two 12 VDC panels wired together in series (positive to

Choosing System Voltage

People often ask, "What system voltage should I choose?" The answer depends on two main factors—how large the system will be and how far the generating sources (PVs, wind generator, hydro turbine) will be from the battery bank. Most off-grid systems run at 12, 24, or 48 VDC nominal.

On the grid, most batteryless, utility intertied inverters have a 48 VDC or higher DC input voltage requirement. So for a grid tie, the system voltage will be dictated by the inverter you choose.

Current is a measure of the rate of electron flow through a circuit or wire. Copper (CU) wire is the standard wire type used in electrical systems. And even though copper is a great conductor, it still presents some resistance to the electrons flowing through the circuit.

Resistance results in the loss of power in a system. And the greater the rate of electron flow (amperage) through a wire, and the smaller the wire gauge, the greater the power loss in the wire. The length of the wire has a big effect on power loss as well. So the main variables affecting power loss in a transmission line are voltage, current, the resistance of the wire itself (which is determined by the type and diameter of the wire), and the overall length of the wire.

Since we have several variables at work, the appropriate transmission wire size needs to be specified for each individual system. In PV systems, the rule of thumb is to

keep the transmission line loss under 2 percent. You can get a wire sizing spreadsheet from the "Promised" section of the downloads page of *Home Power's* Web site at: www.homepower.com. It will help you with your wire size calculations.

The power formula shows us that if you double the voltage of the system, the current is cut in half, but power remains the same. As a result, the majority of residential scale PV systems today are being wired at 48 VDC nominal.

In a smaller system, 12 or 24 VDC nominal operating voltages still often make sense, especially if you plan to run DC appliances. For folks on a budget, another advantage of low voltage PV systems is that modules can be added in smaller increments.

Imagine a PV system with eight, 100 watt panels located 50 feet (15 m) from the batteries. The PVs have a rated output of 5.6 amps at 17.7 VDC. If the PVs were wired at 12 VDC nominal, #4/0 (107 mm²) CU wire would be required between the PVs and batteries to keep voltage drop under 2 percent. If the panels were wired at 24 VDC nominal, #3 (27 mm²) CU wire would satisfy the two percent voltage drop requirement. At 48 VDC nominal, #8 (8 mm²) CU wire would do the trick.

To put things in perspective, at 12 VDC you'd need wire the diameter of your thumb. At 48 VDC you'd need wire the diameter of a pencil!

Photovoltaics

negative) will give you 24 VDC, which is the voltage you're after. Since a series connection increases voltage, not current, wiring two of your 5 amp, 12 VDC PVs in series equals 5 amps at 24 VDC. You multiply 5 amps by 24 VDC and come up with 120 watts, which makes sense because you've wired together only two of your PVs.

You take the other two PVs and wire them in series as well. Now you have two series pairs running at 24 VDC each. If you series these two pairs together, you'll end up with 48 VDC, which isn't the voltage you're after. So to keep the voltage at 24 VDC, you wire the two series pairs together in parallel for a series/parallel configuration. This doubles the current, but keeps the voltage right where you want it, at 24 VDC.

The two, 5 amp at 24 VDC series pairs wired together in parallel give you 10 amps at 24 VDC. You do the math and are pleased to find out that 10 amps multiplied by 24 VDC equals 240 watts total.

After wiring your PVs up at 24 VDC, you're thinking that a 48 VDC configuration will be a snap. You know that series connections increase voltage, and that's what you want to do. You run some numbers...12 VDC multiplied by four modules equals 48 VDC. And 48 VDC multiplied by 5 amps equals 240 watts. So all you need to do is connect the four PVs in series (positive to negative), and you're set.

Power Is Power

You've spent a fun afternoon in the sun bonding with your PVs. And you've decided that wiring up your four

PVs in different configurations is no problem. The main features are that series connections increase voltage, and parallel connections increase current. As long as the PVs are wired correctly, the combined power (wattage) is always the same, no matter what configuration you choose.

As you start to pick up your tools, the dog barks and the UPS truck rolls in. The driver hops down from his rig and happily informs you that the feds have decided to increase the free PV program to eight modules per citizen! He seems even more excited than you are. As you help the driver unload the truck, you confidently ask him, "Hey, how many amps will you get if you wire up your eight, 5 amp, 12 VDC modules in series/parallel for 24 VDC nominal?" (Answer below.)

Access

Joe Schwartz, *Home Power*, PO Box 520, Ashland, OR 97520 • 541-512-0201 • joe.schwartz@homepower.com

Outback Power Systems, 19009 62nd Ave. NE, Arlington, WA 98223 • 360-435-6030
Fax: 360-435-6019 • cfreitas@outbackpower.com
www.outbackpower.com

Xantrex Technology, Inc., Distributed Residential and Commercial Markets, 5916 195th St. NE, Arlington, WA 98223 • 360-435-8826 • Fax: 360-435-2229
inverters@traceengineering.com • www.xantrex.com

Answer: 20 amps at 24 VDC for 480 watts total output.



DEALERS WANTED

ARIZONA	NEW MEXICO
CALIFORNIA	OREGON
COLORADO	SOUTH AMERICA
IDAHO	TEXAS
MEXICO	UTAH
MONTANA	WASHINGTON
NEVADA	WYOMING



LARGE STOCK OF BP SOLAR MODULES BP2150, BP585, SX120 AND SX80s
COME VISIT OUR NEW 5000 SQ FT SHOW ROOM PUBLIC WELCOME




800-677-6527 www.sunamp.com
email: sunamp@sunamp.com

WHOLESALE DISTRIBUTOR
TRACE AUTHORIZED SERVICE CENTER

BOOST YOUR SOLAR OUTPUT

- Our most popular SB50L and SB3048L controllers are ETL listed to UL1741, and CSA/CE requirements
- Featured in Home Power Magazine  "Things That Work" issue #73 and #77.
- Stop throwing away that extra power and use a Solar Boost Maximum Power Point Tracking (MPPT) charge controller.
- Solar Boost charge controllers can deliver up to 30% more power to your batteries over conventional controllers.

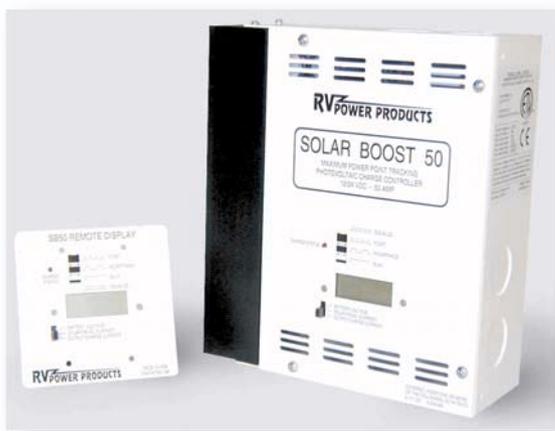

RV POWER PRODUCTS
PROVIDING ELECTRICAL INDEPENDENCE

With Patented SOLAR BOOST™ MPPT Charge Controllers. RV Power Products- The recognized leader in quality MPPT charge controllers. Available in 12/24/48 volt.

Manufactured by RV Power Products and offered by a large network of quality distributors and dealers. Call us today for information or a dealer near you



Visit our web site at www.rvpowerproducts.com
or e-mail to info@rvpowerproducts.com

800-493-7877 or 760-597-1642
2598 Fortune Way, Suite K, Vista, CA 92083


virtually silent

NREL's Wind Turbine Generator System Acoustic Noise Test Report for the Whisper H40 Wind Turbine indicated the difference between the turbine and background noise was between 3 and 7 dBA a difference imperceptible to the human ear



Certified Whisper Quiet


"The quietest turbine ever tested here" reports the NREL (National Renewable Energy Laboratory). Their acoustic test reports the sound of the Whisper H40 never exceeds background noise by 7 dBA making the H40 virtually silent. To see for yourself, download the full report at

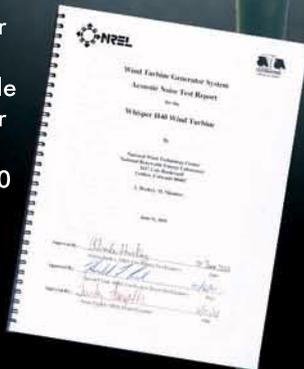

windenergy.com/SUPPORT/downloads.html

Easy to install...

...and now we have made it even easier with the revolutionary Whisper Tower Kits. Complete installation is possible in just a few hours. Kits include all hardware and easy to follow instructions. These PE Certified (in CA & NE) kits are available in 24', 30', 50', 65' and 80' heights. Visit our web site and download complete manuals at windenergy.com

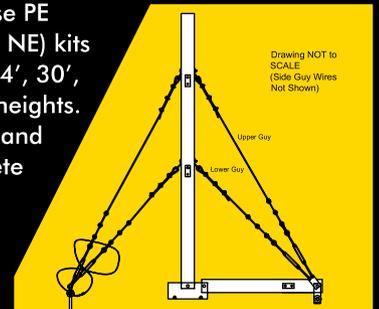

Southwest Windpower

Renewable Energy Made Simple

2131 N. First Street • Flagstaff, Arizona 86004 USA
Tel 520-779-9463 • Fax 520-779-1485
www.windenergy.com • E-mail info@windenergy.com

AIR 403

400 watt rating
Over 40,000 sold
Meets IEC, NREL tested



Windseeker

500 watt rating
NEW composite blades
Patented wind protection



Whisper Nautica

NEW for coastal sites
CE



Whisper H80

Perfect for low wind areas
CE



Whisper H80 WP


Low cost 3-phase AC water pumper uses conventional pump technology




Whisper 175

Over 3000 watts of power



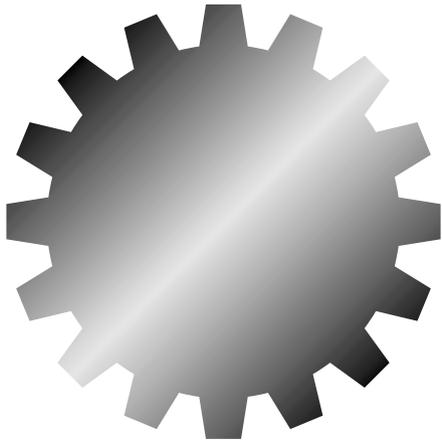

AstroPower is not part of the machine...

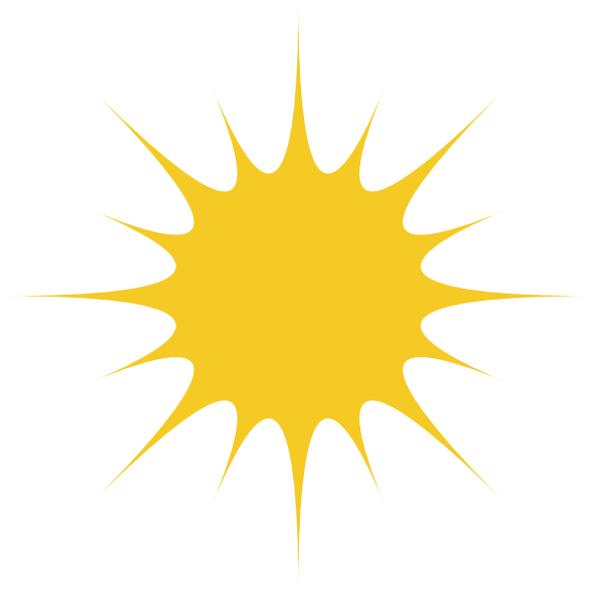

We're part of the solution.


AstroPower is the world's leading independent PV company.

We are supported by shareholders who believe in the future of solar power, not by fossil fuel or nuclear power interests. This allows us to remain focused exclusively on one objective—producing better solar electric power products for our customers.

When selecting a PV supplier, consider not only the products, but also the company behind the products.

Make your choice count.

Choose AstroPower.

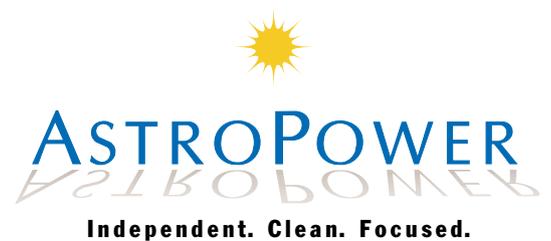

www.astropower.com

PAYBACK

On RE?


How Wrenches Respond

Allan Sindelar

©2002 Allan Sindelar



Professional designers of solar-electric and solar thermal systems are routinely asked about the payback for solar energy. “How many years before the solar water heater you are selling pays for itself?” has been heard since the first solar boom in the 1970s. Now, “How long will it take this PV system to pay back my purchase price?” has been added to the questions that system designers are expected to answer.

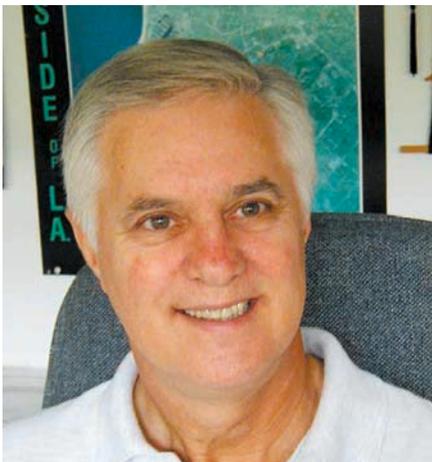

Joel Davidson,
SOLutions in Solar Electricity



William Miller,
SLO Communications



Phil Undercuffler,
Positive Energy



John Veix,
Solar Electric Specialists

Payback can mean many different things. In *HP80*, Karl Knapp and Teresa Jester analyzed the “energy payback” of PV modules. Energy payback time is the amount of time a PV module spends converting light to electricity just to make up for energy used to manufacture the module. Knapp and Jester concluded that PVs recoup their production energy in two to four years, and go on to produce clean energy for thirty years or more.

Another angle is “economic payback.” This is the projected amount of time until the total energy savings achieved by using a renewable energy system equals the cost of the system. This payback question is often posed by a prospective renewable energy user who is trying to justify by conventional terms an investment having benefits that can’t be measured in conventional terms.

A Wrenches Discussion

More than one hundred and fifty “wrenches” (experienced installers of home-scale renewable energy equipment) participate in an e-mail discussion forum. The forum, hosted by *Home Power*, is used for community building, problem solving, and ongoing discussions of installation techniques, *National*



Todd Cory,
Bald Mountain Solar

Electric Code issues, and business issues specific to the renewable energy (RE) industry. Participation is strictly limited to qualified wrenches.

In early September 2001, one wrench asked how others address questions about payback from customers. The question generated a rich discussion for several weeks following. What follows is an edited set of responses to that question by RE wrenches around the world.

Almost all of us have been asked, “What’s the payback?” and “Is it cost effective?” Almost all of us have been told, “I’d rather put my money in the stock market and pay my electric bill with the profits.” The average American now knows that the stock market giveth and taketh away unmercifully, but we still get the questions. I’ve been trying to put together a short response to get skeptics to shut their mouths, open their minds, and think. What do you all think?

My thoughts? Selling stuff, even good stuff, is not my idea of living the good life. I challenge people to reduce their energy consumption by at least 50 percent without buying more stuff. If everyone in the U.S. would cut his or her consumption at least 10 percent, I’d quit selling PV and start enjoying heaven on earth.



Steve Willey,
Backwoods Solar Electric Systems

The bad news is, Americans are not going to consume less, and billions of people in developing countries aspire to consume like Americans. So I guess I’ll just have to keep selling PV until everyone becomes a net energy producer, or all of the planetary resources are used up.


Joel Davidson, SOLutions in Solar Electricity, Culver City, California
joeldavidson@solarsolar.com

Friends, I tell prospective clients that installing PV (or any RE source) is something you do not do just for the payback. Installing an RE system is a great hobby, it promotes the industry, it allows independence from gouging producers, and it’s a great conversation piece.

William Miller, SLO Communications, Santa Margarita, California
wrmiller@slonet.org

I remind “payback” questioners that we think nothing of investing thousands of dollars into a vehicle that plummets in value the moment it leaves the dealer’s lot. We then follow that with huge investments in fuel, oil, maintenance, and repairs—not to mention the “investment” in fighting wars in foreign lands to keep the pipeline open.

What is the payback on that? The ability to go where you want, to do

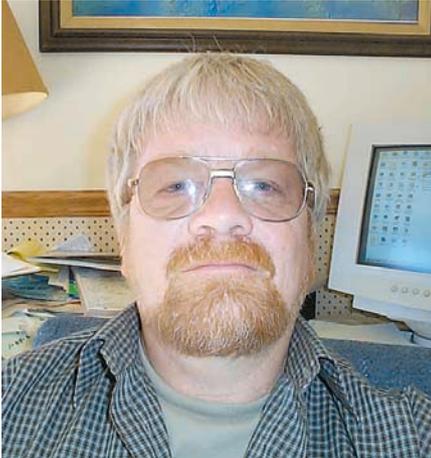

Larry Elliott,
Ion Technologies/Solar Tech

what you want when you want to. Maybe not such a hot investment, but we all do it; we all take it for granted; we think nothing of it.

By comparison, an investment in efficiency (the first and best investment) or a renewable energy system provides the ability to live just as comfortably as the neighbors, without mining energy, emitting CO₂, or damming rivers.

When I prepare a solar thermal quote, I always give focus to the energy output of a system in terms of BTUs of fossil fuel replaced each day. I remind the client that the real payback is fossil fuel that isn't mined, burned, or released into the atmosphere, while their house is still nice and warm and toasty.

We all make investment choices each day. Those investments can be positive, or they can be the status quo.

Phil Undercuffler, Positive Energy,
Santa Fe, New Mexico
phil@positiveenergysolar.com

I turn it around and ask them when was the last time they worked out the "payback" time on their fridge, TV, or car. Like Phil's comments about buying and maintaining a vehicle, it puts things in a better perspective. I usually find that if they



Carl Emerson,
Freepower, Ltd.

are only concerned about "payback," they are doing the right thing for the wrong reason.

John Veix, Solar Electric Specialists,
Christchurch, New Zealand
john@gosolar.co.nz

Good thread. Another reply I have come up with to the usual payback question is to ask them why they think with energy that "Cheaper is better." When they bought their vehicle or home, did they look for the rock bottom, cheapest thing they could get? Of course not, so I point out that likewise, some kinds of energy are different (and better) than others.

Yes, that \$500 used, rusted out, 1967 pickup will move your body from point A to B, just like brown, carbon-based power will light a bulb or run the TV. But green power is different and better because it is clean. Like a Lexus, it does cost more.

I also point out how the current cost of brown power does not begin to include the long-term environmental consequences of using it. I tell them that their children's, children's, children will get to pay that bill. I encourage them to be a leader, be an example to others, and make the only intelligent choice for the health of future generations on our planet.



Travis Creswell,
Ozark Solar

We are dealing with a consciousness shift here, folks. That is why the change to renewables is so much more complicated than what seems to be so obvious to us. Again, 70+ percent of what I end up doing is education of the customer. Too bad the schools don't teach people to think outside the box better.

Todd Cory, Bald Mountain Solar,
Mt. Shasta, California
toddcory@jps.net

Another angle on payback is to ask people how much they paid for their car (often about the same as a PV system). Then ask how many hours a day they operate their car. And how many hours a day they plan to operate electrical items in their home (if it's stand-alone), or how many hours the sun shines (if it's intertied). Further, you can ask how long their car will last, and how long the PVs will last..

Steve Willey, Backwoods Solar
Electric Systems, Sandpoint, Idaho
steve@backwoodssolar.com

To hell with all this pandering to customer queries on payback. When they say that PV is too expensive, I simply ask, "Compared to what?"

Larry Elliott, Ion Technologies/Solar
Tech, Bonanza, Oregon
director@kattel.org



**Kurt Nelson,
SOLutions**

Looking at the bigger picture, short-term thinking for financial gain, largely driven by bean counters, has landed the world in an environmental mess. Those who look for payback continue to perpetrate the same ethos that caused the problem in the first place. Those who choose solar energy regardless of the short-term benefit (or lack thereof) take a responsible position, and break the cycle of greed that has driven environmental irresponsibility.

In New Zealand, with no government subsidies, the systems take 100 years to “pay back” if you simply compare current KWH value generated to all the costs associated with putting in, commissioning, and maintaining a system. I point out that a roof-integrated, solar-electric system requires minimal maintenance and will pay for itself more than twice over during its lifetime. The rest of the roof will never pay for itself, will have one-third of the life, and will require considerable maintenance.

Carl Emerson, Freepower, Ltd.,
Auckland, New Zealand
emerson@freepower.co.nz

Very good thread indeed! I'll tell you all something I realized the other day, as I was flying over Kansas in a single engine plane at about 1,000 feet. We flew over house after house



**Mo Rousso,
Urban Refuge**

with pools in the backyard. I couldn't help but notice that it's things like those backyard pools that we are competing with.

We are asking the average guy with a wife and 2.3 kids to make a choice between a solar energy system, with its very intangible benefits, and that pool—something his entire family can enjoy. I doubt many “average” families can afford both. As a father of a young child with another on the way, I realized that given the choice between the pool and more solar panels, I'd choose the pool every time, and I'm pretty green. What does that say about “average Americana”?

Travis Creswell, Ozark Solar,
Neosho, Missouri • ozsolar@ipa.net

I stick with the fact that renewables are cost effective right now. The reason they don't seem to add up economically is that they are being asked to compete on an unlevel playing field. Fossil and nuclear fuels are heavily subsidized, and neither are paying the environmental costs associated with them.

These aren't just make-believe numbers. We are all paying for those cheap watts and gallons in places other than the meter and the gas pump. Acid rain alone is estimated to cost over eight billion dollars every



**Jay Peltz,
Peltz Power**

year, and what price can we put on Desert Storm? Add to this the fact that our reliance on fossil fuels has long been referred to as a giant pipeline of dollars out of our country, while dollars spent on renewable energy remain at work in our local economy.

Kurt Nelson, SOLutions,
Cornucopia, Wisconsin
sunwise@cheqnet.net

Here's my question: Sure I give the customer many angles to make the system cost effective. But how many people run into problems when you suggest, “Well, it's cheaper to reduce than to produce. We need to get you a new fridge, washer, lights, etc.” Then I show them the math, and it's like major blank time. Just wondering what you all have run into.

Jay Peltz, Peltz Power, Redway,
California • jay@asis.com

I did my first project, a 3 kilowatt, batteryless, grid-tied system, for an 89-year-old woman. She did not do this because of “payback.” She did it because she wanted to stick it to San Diego Gas & Electric, and she derived the value of her money from how she used it.

Mo Rousso, Urban Refuge, Inc.,
Fallbrook, California
mrousso@urbanrefuge.com



Holt E. Kelly,
Holtek Fireplace & Solar Products

I think the task at hand in defining payback is not economic but cultural. This from a letter a potential client wrote explaining why he and his family decided not to install a renewable energy system: "...we have decided that we do not want to make the changes necessary."

The "changes" were efficiency measures to reduce loads. They did not want to "sacrifice" an electric water heater for a solar one, and did not want to look at that "ugly color" of compact fluorescent light. Payback? Just remember: "We do not inherit the earth from our parents, we borrow it from our children." (Chief Seattle)

Holt E. Kelly, Holtek Fireplace & Solar Products, Waco, Texas
hkelly6@msn.com

With PV being called "too expensive" by many in this country, I ask them to look at the September 11 attack on the WTC and tell me: "What is the real cost of a barrel of Middle Eastern crude oil"?

Bob Maynard, Energy Outfitters,
Cave Junction, Oregon
bob@energyoutfitters.com

A typical, PV powered, off-grid home uses five to fifteen percent of the electricity of a conventional home that has utility power. This is not accomplished by forgoing modern



Bob Maynard,
Energy Outfitters

conveniences. Our off-grid home has hydronic heat, a microwave, a Maytag refrigerator and Jenn-Air dishwasher, a computer, an entertainment system, a well pump, and shop tools. We achieve this efficiency by closely adhering to two basic rules: use the right form of energy for the job, and minimize the amount that's wasted.

If all of us in the U.S. lived as though we got our heat and power directly from the sun, we wouldn't be reeling from a terrorist attack on "our way of life." We wouldn't have gone to war to keep our supply of Middle Eastern oil flowing. We would leave the Arctic National Wildlife Refuge alone. We could see the stars in the night sky.

Allan Sindelar, Positive Energy,
Santa Fe, New Mexico
allan@positiveenergysolar.com

I think that this is really important stuff—it goes deep. What if we were to live as though all of our energy came directly from the sun, wind, and modest use of falling water? This would have profound and positive impacts on so many aspects of our lives.

Recent events give us an opportunity to consider how some things might be different if we were wiser in our use of energy and the sources we tapped. Would we have




Allan Sindelar,
Positive Energy

a military presence in Saudi Arabia? Would we give Israel, and a select "club" of other countries, money? Would we be in the mess we are in now? Middle Eastern politics are complex, to be sure, and the connections to oil may not seem obvious. But I do think that oil security (the enabler of "The American Way of Life") is a huge factor in our Middle Eastern affairs.

The real costs of "our way of life" are extremely high—to all of our brothers and sisters all over the planet, including those people who were and are victims of the war we've been waging for a long time, as well as those who fly, swim, crawl, and stretch their graceful, leaf-clad limbs into that beautiful starlit sky.

Despite my short-term pessimism, I feel threads of possibility amid the recent and ongoing tragedies. I sense that we are waking up a bit. Many have said "everything has changed," but I think what we are really saying is that we have changed. There is a hint of a new awareness, which colors how the world feels to us. It is scary feeling this tug at the blinders, yet the birth of a new consciousness can be an extraordinary thing.

It is said that in times of crisis, there is also opportunity. I think this is so true. The path ahead will be

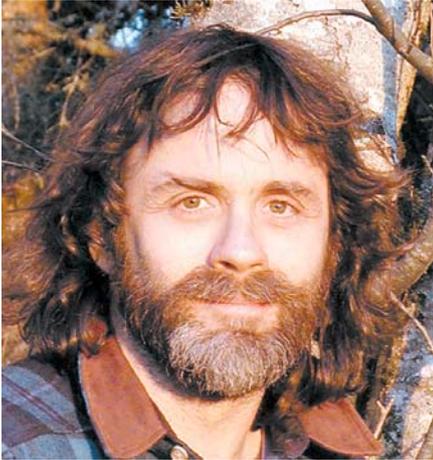

Gary Higbee,
Gary Higbee Technical Services

dangerous, and will also be full of opportunities to grow. This can be a rich time as we look for new possibilities. The old, dysfunctional model of "the American way of life" can give way to a much more enlightened vision. I'd like to think that we could all be a part of offering inspiring examples.

Gary Higbee, Gary Higbee Technical Services, Eugene, Oregon
ghigbee@efn.org

When asked either, "What's the payback?" or "How does this compare to utility power?" I simply say, "It's the cheapest clean energy you can buy." This completely stymies some, and causes all to pause. It helps convey three ideas in



Jeffery Wolfe, P.E.,
Global Resource Options

a single sentence: 1. It's not expensive, 2. It's clean energy, and 3. (if they're savvy) You can't buy clean energy any other way (at least in Vermont at this point). If they miss the point, and thought it was cheaper than utility power, well, that's the point.

We are cultural educators. Our biggest barrier is not cost—it is culture. The fact that people rely on the cost of electricity in making their decision is due to their cultural indoctrination. That's why the same person who buys an SUV for city driving can say, and believe, "Solar energy doesn't make economic sense." Culture is the most powerful influence on all our lives and actions.

In trying to do the right thing, and make a living by selling systems, I note that having a PV system installed is a major consciousness raiser in further reducing energy use after installation. People want to see that meter turn backwards, and they do start to pay attention.

I also use the story of the apple grower who has an apple for sale for fifty cents. It is a beautiful apple, organically grown, very beneficial to your health, not harmful to the soil it is grown in, nor harmful to the workers who produce it.

What? Too expensive? The grower also has an apple for sale for twenty-five cents. It is also a beautiful looking apple. It is grown with pesticides, harms the soil around it and the water through runoff, and causes disease in the workers who produce it. Oh, and it is poisonous to you. Which apple would you like to buy?

Jeffery Wolfe, P.E., Global Resource Options, Strafford, Vermont
global@sover.net

Access

Allan Sindelar, Positive Energy, Inc.,
3900 Paseo del Sol #201, Santa Fe,
New Mexico 87507 • 505-424-1112
Fax: 505-424-1113
allan@positiveenergysolar.com
www.positiveenergysolar.com



NO HASSLE WIND POWER

Rugged 18" blade Ampair 100 produces up to 100 Watts *continuously*, 24 Hours per day, at wind speeds from 8 to 100+ mph. No brakes or furling needed...guaranteed at any windspeed! Veteran of 3 years *continuous* Antarctic service. Roof mount is OK; pole mount is better. Put it up, hook it up to the batteries and forget it!

Jack Rabbit Energy Systems

425 Fairfield Ave., Stamford, CT 06902 • (203) 961-8133
FAX (203) 961-0382 • e-mail: jackrabbitenergy@worldnet.att.net

The Alternative Energy STORE

"The on-line store for alternative energy products at discount prices"

www.AltEnergyStore.com

Specials

Advanced Energy MM 5kw grid intertie/battery back-up inverter	BP85 85W Panel Monocrystalline, high efficiency
Only \$5959	Only \$425

E-mail: Sales@AltEnergyStore.com - Sales:(877)878-4060 or (207)469-7026

BP SOLAR • ZOMEPower • ZOMEWORKS • Southwest Windpower • PULSE • PHOTOWATT • TRACe

Our AC & DC boxes really don't care **Who's** between 'em.

But we do. Rpower™ by Energy Outfitters delivers the only flexible component mounting system with code compliant AC and DC boxes. You choose from our large selection of leading manufacturer's products to create a custom tailored, high performance, integrated renewable energy system.

Whether you're a home owner looking for a preassembled on or off grid power solution or a RE contractor who wants a system that's easy to build and install, ask for Rpower™ from Energy Outfitters. THE integration experts.



OutBack
Power Systems

Rpower
By Energy Outfitters Ltd



No more big bills.

Copyright © 2001 iPhotoDisc, Inc.



Thanks to Vanner's new Sunlynx Interface Module.

For details, see page 53

First in loyalty, quality and support



800-AC POWER

www.vanner.com

e-mail: pwrsales@vanner.com



Looking for more capacity?

S-530
530 AH (100 hour rate)
12 1/4 (L) X 7 1/8 (W) X 16 3/4 (H)
124 lbs (wet), 96 lbs (dry)

Now Shipping... THE NEW S-530

- 530 AH (100 hour rate), 400 AH (20 hour rate)
- Same physical dimensions as our S-460
- 1,300 plus cycles at 50% DOD
- Available wet or dry charged
- 7 year warranty



Surrette Battery Company, Ltd.

800-681-9914
sales@rollsbattery.com

Roll's
Battery Engineering

Solar water pumps for every purpose

Don't throw energy down the drain with an inefficient water pump. Dankoff Solar DC pumps use 1/3 to 1/2 the energy of conventional AC pumps run by inverter.

Vertical lift
to 960 Ft. (290 m)
Pressurizing
to 100 PSI (7 bar)
Flows to 75 GPM
(285 lpm)

Flowlight[®] Booster Pump
SunCentric[™] Centrifugal
Solar Force[™] Piston
Solar Slowpump[™]
Solaram[™]



SURFACE PUMPS
SUBMERSIBLE PUMPS

SunRise[®]
TSP-1000[™]
AND MORE . . .

Depths to 600 Ft. (180 m)
Flows to 50 GPM (200 lpm)



Water supply for homes, villages,
agriculture, parks and recreation,
and more—*since 1983*

Also a wholesale distributor of power system components

Call for a dealer referral
Toll-Free (888) 396-6611
(505) 473-3800

www.dankoff solar.com



Backwoods Solar Electric Systems

For an earth restored and a world at peace. Solar, Wind, Hydro
Independent Electric Power for the Remote Home *where utility power is not available.*

When you speak with Backwoods Solar, your questions are personally answered by people using the products everyday. Our catalog / planning guide teaches the basics of installing solar electric residential power. We can refer you to skilled installers in most states. Our mountaintop business, shop, and home have been powered by equipment from our catalog for 25 years. Utility lines are still 2 miles away. We are a family business living with our products.

177 PAGE CATALOG / PLANNING GUIDE
FREE to Home Power readers

Phone (208) 263-4290 FAX only (888) 263-4290
Website www.backwoodssolar.com
Email info@backwoodssolar.com

Visit us or write:

Backwoods Solar Electric Systems
1395-HP Rolling Thunder Ridge
Sandpoint, Idaho 83864 USA



NORTH-WEST

ENERGY STORAGE



To receive information on our complete line of quality RE products and the **HuP Solar-One Battery** call 800-718-8816 or 208-267-6409 9 am-4 pm pst 6778 El Paso St. Bonners Ferry, ID. 83805 www.nwes.com batteries@nwes.com

- **HuP Solar-One** still has the best warranty in the business!
- **HuP Solar-One** positive plates are wrapped in an envelope!
- **HuP Solar-One** uses a patented recipe to achieve extra life at deeper cycles than the competition!
- **HuP Solar-One** has removable cells for easier installation!
- **HuP Solar-One** offers free shipping in the lower 48 states!
- **HuP Solar-One** uses flip top caps that make maintenance quicker!
- **HuP Solar-One** is available in 9 sizes, reducing paralleling!
- **HuP Solar-One** provides all interconnecting hardware!
- **HuP Solar-One** has over 9 sq. in. of terminal area for multiple lug connections!
- **HuP Solar-One** batteries have been in RE service for over 10 years!

HuP Solar-One Batteries!
There Is A Difference!

Wrench inquiries invited. Paid service calls for qualified Wrenches!

Adaptable.



**First in
loyalty,
quality and
support**



VANNER
INCORPORATED

800-AC POWER

www.vanner.com

e-mail: pwrsales@vanner.com

See how on
page 57

U.S. ENERGY FLOW— IN THE BELLY OF THE BEAST

Randy Udall

©2002 Randy Udall

From a biological perspective, think of the U.S. economy as the largest “animal” the planet has ever seen—a living, breathing *T. Rex Americus*, whose energy appetite is gargantuan. If we dissect the beast to study the energy flows that sustain it, we end up with this chart, produced at Lawrence Livermore National Laboratory.

At first glance it may seem laughingly obtuse, a bizarre eye exam. But if you are interested in America’s energy realities, challenges, and opportunities, it’s worth studying.

Looking at the chart, energy flows into the economy from the left. It is consumed by power plants, boilers, furnaces, aircraft turbines, and automobile engines in the middle. The energy services provided by those prime movers are used in the residential, commercial, industrial, and transportation sectors on the right.

In 1999, the U.S. economy devoured 97 “quads,” or 97,000,000,000,000 British thermal units. More than half of the energy was, as the chart demurely puts it, “rejected” at the upper right. The remainder did useful work.

The Oil Tribe

Petroleum provides 39 percent of U.S. energy. Some oil is converted to electricity, some fuels home furnaces, some is used to make petrochemical products, but most moves cars, SUVs, trucks, planes, tractors, snowmobiles, etc.

Since September 11th, we have been reading about Uzbeks and Pashtuns—exotic tribes in central Asia. But we Americans are the Oil Tribe, consuming 150 pounds (68 kg) of petroleum per person each week. Domestic production peaked in 1970, and we now import nearly 60 percent of the oil we demand.

Transportation is a petroleum monoculture; alternative fuels like biodiesel, ethanol, natural gas, and propane barely register. Note too, how terribly inefficient our transportation system is, wasting four of every five units of energy it consumes.

Coal Makes Kilowatts

Coal provides nearly one-fourth of U.S. energy, and most of it is burned in electric power plants. One pound (0.45 kg) of coal will produce one kilowatt-hour, plus two pounds (0.9 kg) of carbon dioxide, as the carbon in coal combines with oxygen in the air.

A typical coal plant wastes two out of every three units of energy it consumes. Nonetheless, coal has been the backbone of our electricity system for a century, and climate concerns aside, is likely to be the dominant fuel

used for electrical generation for decades to come. The reason? It is cheap and abundant, our most plentiful domestic fuel.

Methane Madness

Each year, 280 million Americans use as much natural gas as 3 billion people in Europe and Asia. What we call gas is mostly methane, a wonderful molecule that can heat your home, dry your clothes, grill your steak, and run a car or a power plant.

Nearly all new power plants are gas fired. Gas is also critical to agriculture, since it is the key feedstock for fertilizer. Per capita, we use a dumpster’s worth of gas each day. U.S. gas production peaked in 1973, and imports have grown sharply since 1990. Indeed, we are now the world’s largest importer.

When Canadian gas production peaks in the next decade, they may decide to cap exports to the “damn Yanks.” Sooner or later, expect to see a US\$15 billion gas pipeline to Alaska. We will also need to import increasing amounts of liquefied natural gas. It is cooled to -260°F (-162°C), and shipped in on special tankers, which have the energy density of a tactical nuclear weapon.

Bit Players


The purple band dubbed “biomass,” and the hydropower band above it include water, wood, wind, solar, geothermal, landfill gas, and other forms of renewable energy. Renewables are about 7 percent of the energy pie. Wind and solar are, in percentage terms, the world’s fastest growing energy sources. But in the grand scheme of things, they remain dwarfed by fossil fuels.

Pick Your Poison

Many people have no love for nuclear reactors, but they provide 20 percent of the nation’s electricity, and about 8 percent of total energy. No nuclear plants have been ordered since 1980. We haven’t figured out what to do with the radioactive waste.

On the other hand, nukes don’t produce greenhouse gases. Is a nuclear “renaissance” on the horizon? The Bush administration would like to see it happen, but most utility experts think it’s highly unlikely.

Net Primary Resource Consumption 97 Quads

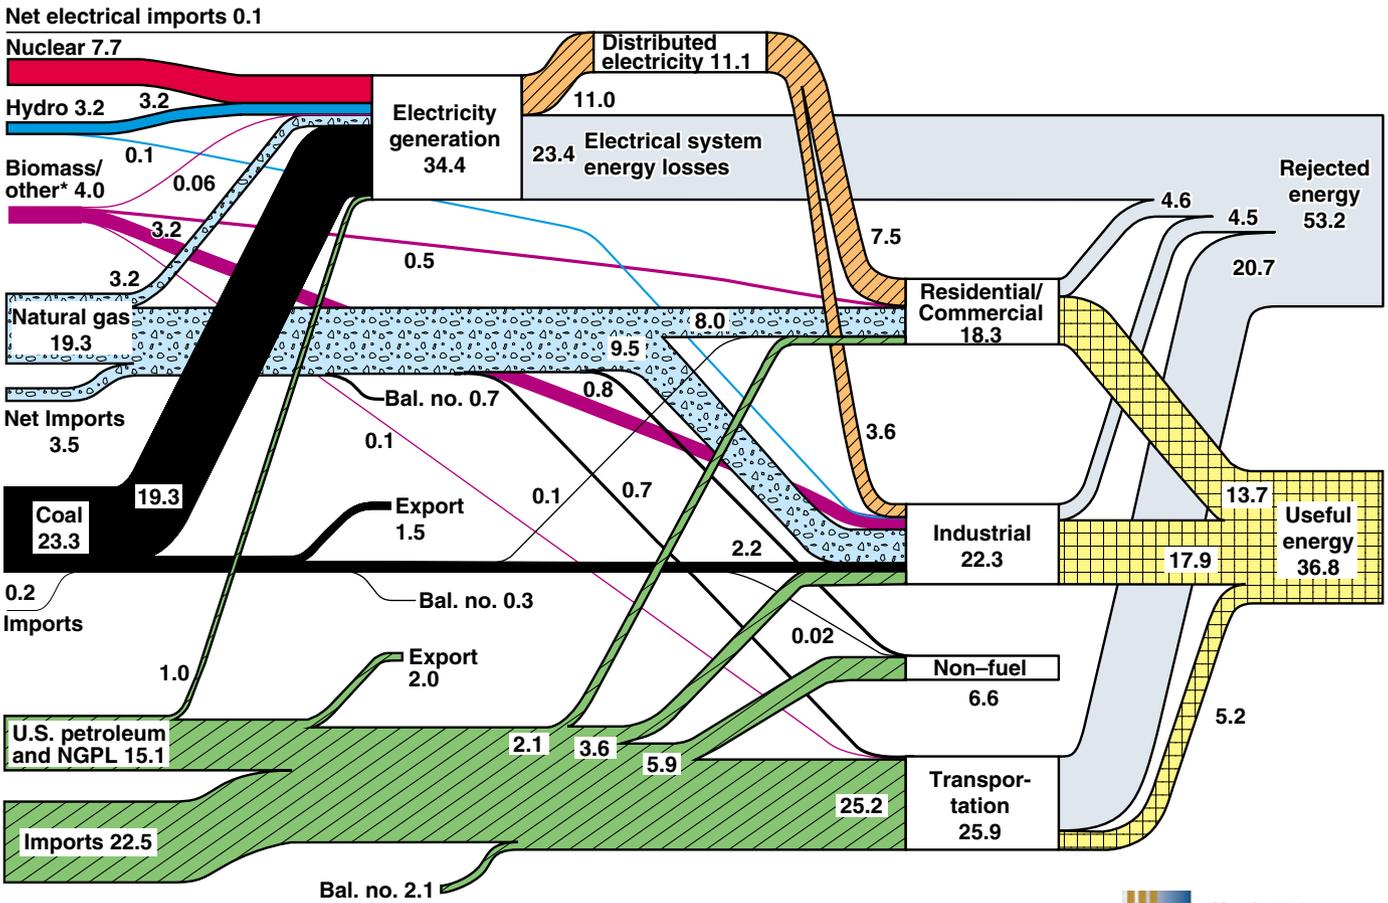

Source: Production and end-use data from Energy Information Administration, *Annual Energy Review 1999*
 *Biomass/other includes wood and waste, geothermal, solar, and wind.

March 2001
 Lawrence Livermore
 National Laboratory

Excreta

Our economy is not, metabolically speaking, a thrifty creature. About 55 percent of the energy that flows into the economy is ejected as *T. Rex* dung. This waste carries with it a huge pollution and climate burden.

Vice President Cheney said that “conservation may be a sign of personal virtue, but it is not a sufficient basis for a national energy plan.” Despite this belief, it is obvious that *T. Rex Americanus* must become more efficient if it wishes to continue growing. As Amory Lovins and others have noted, more efficient appliances, lightbulbs, or cars that save one unit of energy on the right side of the chart, avoid the need to pump in three or four or five additional units of energy on the left.

Looking Ahead

Energy systems change slowly. History shows that none of the existing energy flows or prime movers will cede its position without a fight. If fuel cells aim to displace internal combustion engines, they will have to battle for market share. Likewise for hydrogen, which today does not appear on the chart.

In the long run, of course, renewable energy is destined to supply a bigger share of the load. But despite the depletion problems that face both oil and natural gas, fossil fuels will remain dominant for decades to come. Of course, that's at a national level. At a household level, anyone can begin to embrace energy efficiency and wind, solar, or geothermal energy. And tens of thousands of families have begun to do just that.

Access

Randy Udall, Community Office for Resource Efficiency (CORE), PO Box 9707, Aspen, CO 81612
 970-544-9808 • Fax: 970-544-9599 • rudall@aol.com
www.altenergy.org/core

Credit for the energy flow chart is given to the University of California, Lawrence Livermore National Laboratory, and the Department of Energy, under whose auspices the work was performed. This and charts for previous years are available at <http://en-env.llnl.gov/flow>. A chart for the year 2000 will be available sometime in 2002.



No Power? No Problem!

There is more to a working renewable energy system than a cheap deal on a pile of hardware.

We Provide:

Complete service. We do solar, wind, microhydro and pumping systems. Load analysis, site survey, system design, sales, installation, user training, and tech support long after the warranties expire. We live on renewable energy, have 20 years of experience, and have established over 500 systems. We specialize in NEC® compliant, safe systems that will make your Electrical Inspector smile!

Equipment for DIY. We offer reasonable deals and technical reality checks. Why settle for a packaged system when you can have yours custom designed by an expert?

Your best resource is a local pro. Tap into our network of qualified, competent Electron Connection associates across the country.

Going into the Biz? Why talk to a "sales technician" when you can talk to an electrician? We KNOW what works and how it works. We offer technical support, system design help, prompt shipment, fair pricing and NO BULL. Local referrals always. Electrical competence required.



@.Electron Connection

CA Electrical Lic #613554
OR CCB Lic #149724

800-945-7587

toll free

www.electronconnection.com

online catalog



Siemens Solar
PowerPro
PARTNER

XANTREX
Smart Choice For Power

PO Box 203, Hornbrook, CA 96044 USA
Voice / Fax: 530-475-3401 • E-mail: econnect@snowcrest.net

You can't always rely on the grid

Rolls

BATTERY ENGINEERING
1-800-681-9914

Rolls Battery Engineering Ltd. 8 Proctor St., PO Box 671, Salem, MA 01970 Email: sales@rollsbattery.com www.rollsbattery.com

You have invested in an **alternative energy generating system**. Make sure your **battery** is NOT your weakest link! **Insist on North America's best deep-cycle battery... *Rolls***

- ✓ **Dual-container construction** - eliminates leaks, stray current, and decreases maintenance
- ✓ **Unsurpassed cycling** - the most dense active material in the industry - 3300 cycles (50% DOD)
- ✓ **Modular construction** - easier installation
- ✓ **Average life expectancy is 15 years** - warranted for 10 years



Look over your shoulder... we'll be there.

The new Vanner Sunlynx Interface Module. Reliable even when the grid isn't.



- 120/240Vac allows consumers to power the average house or small business with one inverter
- Produces up to 4000 watts of continuous power when paralleled
- Modular design creates clean, professional-looking installation
- Pure sine-wave output allows the use of the most difficult loads with a Vanner RE system
- Pure PV support allows the system to run when the grid is not present
- Upgradable to a battery backup system



First in loyalty, quality and support

See the complete RE family on page 61

800-AC POWER

www.vanner.com • e-mail: pwrsales@vanner.com

Digital Imagery ©Copyright 2001 PhotoDisc, Inc. [Lyne]



I-RENEW's 10th Annual Energy Expo



Richard Perez

©2002 Richard Perez

It's a bird, it's a plane... No it's I-RENEW President Rich Dana assembling the geodesic dome (top inset photo).

A young fairgoer enjoys solar powered hot cocoa from I-RENEW's 1 KW, mobile PV trailer (main photo) .

Inside the fair's tents, there were deals to be had at the exhibitors' booths (bottom inset photo).

It Was Free!

One of the unique features of I-RENEW's Energy Expo is that it was free. There was no admission charge, while camping on site was just US\$5. Exhibitors secured booth space by donating a US\$50 product to I-RENEW's silent auction. This auction was well attended, and many people took home terrific deals on everything from RE gear to educational materials.

In spite of a constant drizzle on Saturday and part of Sunday, over 2,000 people came from Canada, Colorado, Georgia, and thirteen other states to attend this fair and meet with the more than 60 exhibitors. These are wonderful folks, and they packed the 64 workshops held during the fair. The educational nature

On September 8 and 9, 2001, the Iowa Renewable Energy Association (I-RENEW) held its tenth annual Energy Expo in Hiawatha, Iowa. This was the first time that *Home Power* attended this fair. We were amazed with the event, and gave ourselves a good butt kicking for all the previous ones we had missed.

of this fair overflowed onto the exhibit grounds. I remember one instance where at least a dozen folks started an unplanned workshop at *Home Power's* booth. The topic was using RE to make hydrogen, and using this hydrogen to power all of America. I was surprised at the knowledge these folks had.

I-RENEW had their mobile solar-electric system on site. It was a real treat to check out this system firsthand. It is a large trailer with a deployable 1 KW PV array, batteries, and a 4 KW inverter. I-RENEW has powered many events and concerts with this trailer. See *HP68*, page 50 for a complete write-up of this cool "Solar-Powered Bluesmobile." Transportation using RE was also well represented, with Electrathon racers and the Iowa State University's PrISUm, a purely PV-powered race car.



"What was that?"

This electric racer piqued the interests of surprised fairgoers.

Prairiewoods Franciscan Center

Hiawatha is a suburb of Cedar Rapids, Iowa. So I expected the I-RENEW Energy Expo to be in a suburban setting. I was wrong. Perhaps the most wonderful thing about this fair was the venue.

Energy Expo organizers Tom Snyder, Tim Schulte, and Martin Smith had collaborated with the Franciscan Sisters and staff at Prairiewoods to have this fair at their center. The Franciscan Center already had a huge head start with renewable energy. Through previous I-RENEW workshops, the center has two PV powered straw bale buildings, solar hot water, and passive solar architecture, complete with a Trombe wall to store heat.

One of the two, PV powered straw bale hermitages at the Prairiewoods Franciscan Center.



The Franciscan Center is a beautiful location, not at all the suburban situation I had imagined. The 70-acre grounds are green and spacious, with more than enough room for the Energy Expo and for the many folks who were camping on site.

Instead of manicured lawns, the Sisters opted for what they call "wildscaping." The grounds are filled with the native plants that have inhabited the Midwest prairies for centuries. Just strolling through the grounds was an education in natural history. And the people were not the only ones appreciating this beautiful site. The grounds were filled with hundreds of monarch butterflies that were our constant companions during this magical weekend.

Karen and I are not big fans of organized religion, but the Franciscan Sisters at Prairiewoods wiped prejudices and stereotypes from our minds. These Sisters are very involved with their local ecology and using renewable energy.

Karen attended the "Blessing of Animals" that the Sisters held. It was a wonderful and touching scene, as fair attendees brought their dogs forward to be blessed. We're not talking a dab of holy water and "hit the road" here. Each animal was petted, talked to, and made to feel as special as they really are. St. Francis of Assisi would have felt entirely at home during this fair. The love and devotion of these Franciscan Sisters added immensely to this Energy Expo.



Solar Domestic Hot Water (SDHW) workshop at the Prairiewoods' guest house. Three of the Franciscan nuns participated in the workshop.

A Success?

Over the last eleven years, I have attended more than fifty energy fairs. Some are large with tens of thousands attending, others smaller. All have one thing in common—people come because they want to learn about renewable energy and sustainable living.

The 2001 I-RENEW Energy Expo was a huge success. Folks came and they learned. It was a weekend of nonstop good energies and wonderful people. I don't know when I've had a better time. Next year's I-RENEW Energy Expo will be held on September 7 and 8, 2002. The location will be the same place—Prairiewoods, Hiawatha, Iowa. Come and join us!

Access

Richard Perez, *Home Power*, PO Box 520, Ashland, OR 97520 • 530-475-3179 • Fax: 530-475-0836
richard.perez@homepower.com
www.homepower.com

Iowa Renewable Energy Association (I-RENEW), PO Box 355, Muscatine, IA 52761 • 563-288-2552
irenew@irenew.org • www.irenew.org

Prairiewoods Franciscan Center, 120 East Boyson Road, Hiawatha, IA 52233 • 319-395-6700
Fax: 319-395-6703 • ecospirit@prairiewoods.org
www.prairiewoods.org



Meeting your electrical energy needs



Unbreakable
Lightweight
Reliable
Weather Resistant



UL Approved
Flexible
Shadow Tolerant
Durable

At a time when power is in demand.

UNI-SOLAR
The Power To Change The World

Bekaert ECD Solar Systems, LLC
3800 Lapeer Road • Auburn Hills, MI 48326
(800) 843-3892 • Fax: (248) 364-0510
www.uni-solar.com

Another example of
ovonics
@work
Sustainable Energy Solutions Through Innovation

Solar Electric Inc.
5555 Santa Fe Street, Suite D
San Diego, CA 92109
(800) 842-5678 • Fax: (877) 842-5678
www.solarelectricinc.com
solar@cts.com

Let our family be a part of your family.

Courtesy of DOE/NREL and Steven Strong

DC Control Module



RE-4500 Inverter/Charger



Sunlux Interface Module



AC Control Module



**The RE Series Inverter/Charger System and Modules.
Power for your world.**

First in loyalty, quality, and support

800-AC POWER • www.vanner.com

4282 Reynolds Drive • Hilliard, Ohio 43026



E-mail: hp@MrSolar.com
877-226-5073

MrSolar.Com

VOTED BEST SOLAR WEBSITE

By the people who count, our customers.

\$ Best Web Prices \$

**Online Convenience
In Person Service**

- System Design
- Huge Inventory
- Experienced Staff



OutBack Power Systems

For more information ask your dealer / distributor or visit us on the web at www.outbackpower.com

Finally!
an alternative to
Brand X

PSPV

PSSB



PSR

Shown with the New AEI MultiMode Inverter. The outdoor PSR-3R and MultiMode mounting bracket are add-on options for the standard PSR enclosure.

PSPV

Combiner
\$139 retail
Includes 2 positive busbars, 1 negative busbar, Type-3R enclosure. Add up to twelve 6,10,15 amp 125VDC breakers \$12 each.

PSSB

(SunnyBoy)
\$249 retail
Install using six 48VDC strings for peace of mind. Type-3R enclosure includes 600VDC Listed disconnect. Optional AC disconnect \$35

Can be Mounted Vertical or tilted back to 3/12 pitch.

OutBack Power Systems Inc. 19009 62nd Ave NE Arlington, WA TEL 360-435-6030 -- FAX 360-435-6019

OutBack Integrating Partners

Energy Outfitters Ltd
(800) 467-6527
www.energyoutfitters.com

Inter-Island Solar Supply
(808) 523-0711
www.solarsupply.com

Sunwize
(845) 336-0146
www.sunwize.com

OutBack Distributors

BP Solar
(301) 698-4200
www.bpsolar.com

Schott Applied Power
(800) 777-6609
www.solarelectric.com



SUN EARTH INC.
Quality Solar Energy Products

**THINK THERMAL-
THINK SUNEARTH**



The Empire Series Liquid Flat Plate Collector

www.sunearthinc.com

SunEarth, Inc.

4315 Santa Ana Street, Ontario, California 91761

(909) 605-5610, FAX (909) 605-5613

Distributor inquiries welcome.



**We've reduced
our energy use
even further!**

**Need a High Efficiency Refrigerator
for a Harsh Climate?**

SUN FROST

P.O. Box 1101, Arcata, CA 95518-1101

Phone: 707-822-9095 • Fax: 707-822-6213 • www.sunfrost.com

SOLAR CONTRACTING
SINCE 1977
LIC #CVC056643

The Southern Star in Solar

SERVING THE SOUTHERN UNITED STATES & CARIBBEAN



Jamie on a job in the Bahamas.

FULL SERVICE CONTRACTING & SUBCONTRACTING

FROM CONCEPTION TO COMPLETION.

WE'LL ALSO INSTALL YOUR EQUIPMENT AT YOUR SITE.

Energy Conservation Services



Tropical Solar Contractors

SOLAR ELECTRIC, HOT WATER & POOL HEATING

(352) 377-8866

Siemens Solar
PowerPro

6120 SW 13th Street • Gainesville, Florida 32608 • USA • www.ecs-solar.com • tom@ecs-solar.com

Trojan Maroon. Because half the day is night

Count on Trojan Battery Company for the power you need to get you through the night. You'll enjoy life more and accomplish more when your renewable energy system includes the best deep cycle batteries going. Like our breakthrough L16H with its light but strong Polyon™ case. Or the T-105, a long time favorite in PV circles. Both feature maroon cases and easy lift handles. And both benefit from Trojan's performance engineering. The great ideas we've hatched include our exclusive Alpha Plus™ high density paste



formulation, which delivers the industry's highest concentration of active material. And our proprietary Maxguard® Advanced Design Separator for increased battery life and run time. Its special design cuts water consumption and maintenance needs. Not enough hours in the day? Then ask for us by name. Or by color. For the full story



on Trojan deep cycle batteries, call us at 800-423-6569, fax to 562-906-4033, or visit www.trojanbattery.com. (Trojan's business hours are 7:30 a.m. to 4:00 p.m. Pacific time.)

2001 Texas Renewable Energy Roundup

Tom Bishop

©2002 Tom Bishop

Texas is a big state, and Texans do things in a big way. When they get excited about something, they jump in with both feet, boots and all. Renewable energy is no exception. The interest and enthusiasm in Texas for homemade energy turned Texans out in herds on September 28–30, 2001 to take advantage of presentations, workshops, and an opportunity to talk green energy with vendors and other fairgoers.

Tech in Texas—impressed by PV.



Photo courtesy of Steve Weikal, WeikalMedia

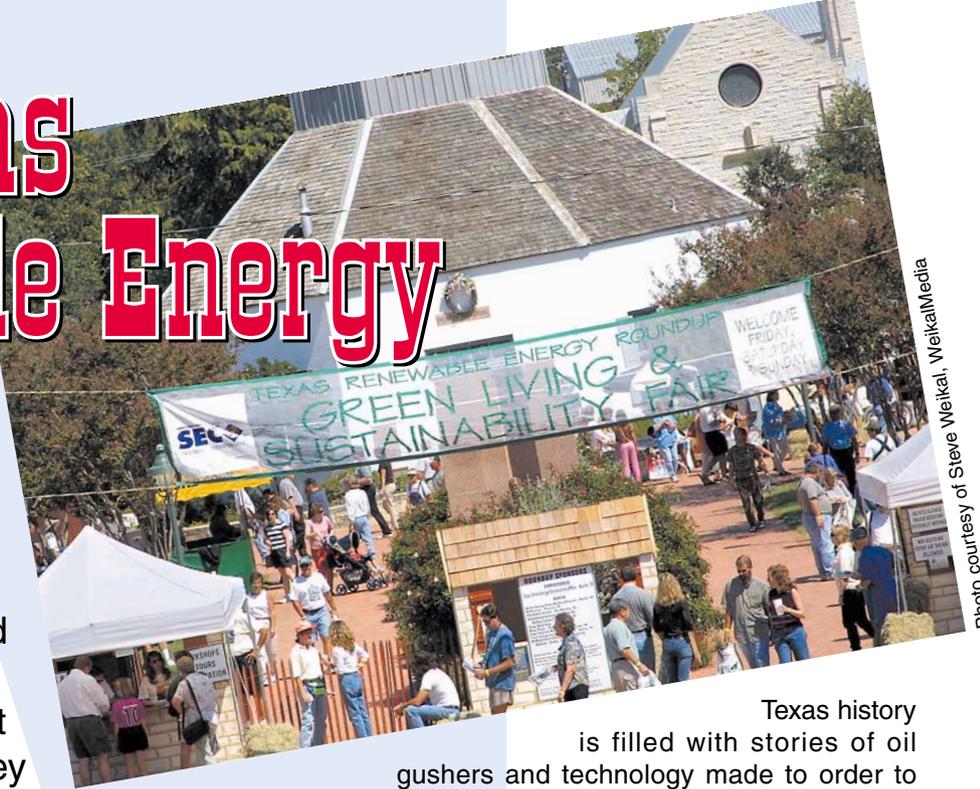


Photo courtesy of Steve Weikal, WeikalMedia

Texas history is filled with stories of oil gushers and technology made to order to meet the energy needs of a hungry (or should we say thirsty) nation. If the enthusiasm of the people I met at the Texas Renewable Energy Roundup, Green Living, and Sustainability Fair in Fredricksburg is any indication, the state of Texas will again be rising to the occasion.

Yesterday's Oil Patch Becomes Today's Wind Farm

Many large wind farms are being sited in Texas due to the abundance of wind and open land. Most of the citizens see this as a chance to renew their status as the energy capital of the country. I won't disagree.

One gentleman I met was poised to sign a lease to place 135 megawatts of wind machines on his ranch. That would be more than ninety 1.5 megawatt machines. Admittedly, not everyone at the fair was situated so nicely. But there was plenty of enthusiasm

Water pumping windmills still make good RE sense.



Photo courtesy of Steve Weikal, WeikalMedia



Photo courtesy of Steve Weikal, WeikalMedia

large number of people passing through our booth, there just wasn't enough time. Just a few of my favorites were:

- Fun with Fuel Cells, by Steve Wiese
- Building with Straw Bales, by the Straw Bale Association of Texas
- Installation and Code Compliance, by John Wiles
- Solar Cooling, by Dr. Gary Vliet

There was no shortage of renewable energy vendors and manufacturers represented. You could get your hands on the latest and greatest gizmo for supplying independent electricity, cool air, hot air, compost, clean water, and just about anything else you can imagine related to clean, independent living.

Adult fairgoers weren't alone in their quest for knowledge.

for the smaller generators, which can supply individual residences.

Energy Independence in the Lone Star State

Texans take independence very seriously. That lone star on the Texas flag is a symbol of their independence. It was put there shortly after Sam Houston "opened a can of whup ass" on old General Santa Anna while yelling "Remember the Alamo!"

This independent spirit was evident in almost everyone we talked to about the stranglehold OPEC has on the family pocketbook. They express their indignation with a soft southern drawl, but from the looks of it, they are ready to back up their complaints with action. Texas is a place that is poised to break the renewable energy market wide open. With plenty of wind and sun at their disposal, it shouldn't be very long.

Fair Highlights

Some very good workshops were available, both free and by paid enrollment. I would like to have attended many of them, presented by some very knowledgeable individuals. But due to the

Natural building techniques, like straw bale construction, were demonstrated.



Photo courtesy of Steve Weikal, WeikalMedia



In addition, the local utility authorities had some attractive booths showing what they are doing to provide locals with nonpolluting electricity. This was a good indicator that they know folks around Austin and San Antonio want something other than nuclear and fossil fuel generated electricity.

One of my favorite attractions was Sunny, the 7 foot (2.1 m) tall remote-controlled robot that traveled around the fair telling corny jokes and advocating renewable energy—solar, wind, and especially biomass. There was also a long-horned steer with a saddle. You could have your photograph made on the steer for a small price. From the smell of the steer, I believe he was powered by methane.

See You in Fredricksburg—2002

The historic town of Fredricksburg is one of the prettiest towns I have ever seen. The architecture is predominantly “west Texas genteel,” of white native limestone and granite. The people are friendly, chatty, and a joy to be around. Hotel accommodations were inexpensive and very comfortable, and the weather was a balmy 80°F (27°C) during the day.

Fair organizers, Russel Smith of Texas Renewable Energy Industries Association and Kathryn Houser of Texas Solar Energy Society.

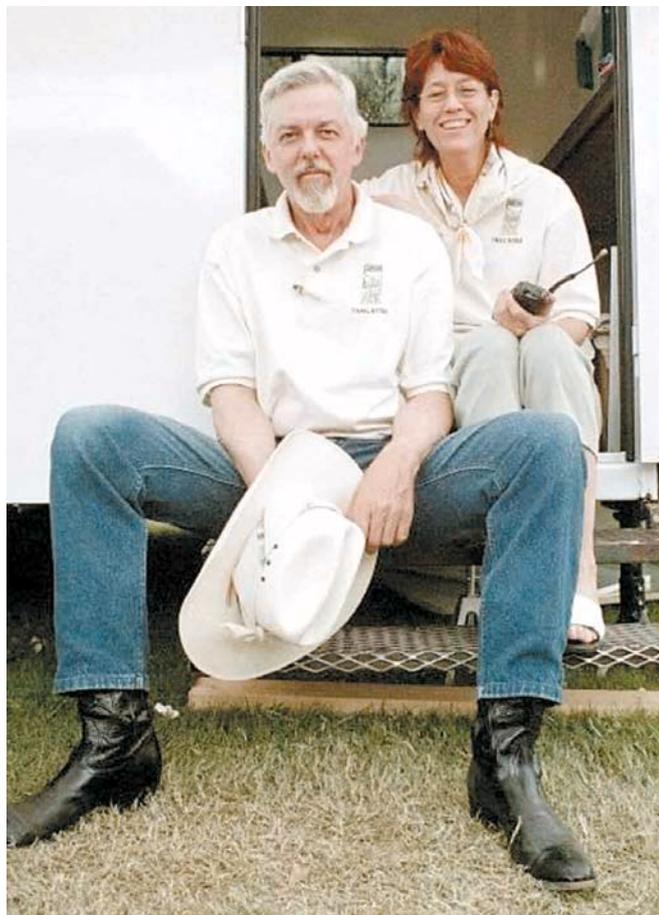


Photo courtesy of Judy Pearson



Photo courtesy of Steve Weikal, WeikalMedia

Electric vehicles rounded out the RE scene in Fredericksburg, Texas.

The nightlife was an extra bonus. Pearl, Shiner, and Lone Star beers were ice cold and on tap at the local taverns, and the local music was hot. It was a top notch renewable energy fair with all the trimmings. I can hardly wait till next September to go back and take that longhorn out for a spin!

Access

Tom Bishop, Sunelco, The Sun Electric Company, PO Box 787, Hamilton, MT 59840 • 800-338-6844 or 406-363-6924 • Fax: 406-363-6046
tbishop@kyocerasolar.com • www.sunelco.com

Texas Renewable Energy Roundup, Green Living, & Sustainability Fair, Kathryn Houser, Texas Solar Energy Society (TXSES), PO Box 1477, Austin, TX 78767
800-465-5049 • Phone/Fax: 512-326-3391
info@txses.org • www.txses.org

Russel E. Smith, Texas Renewable Energy Industries Association, PO Box 16469, Austin, TX 78761
512-345-5446 • Fax: 512-345-6831 • r1346@aol.com
www.treia.org

Steve Weikal, WeikalMedia, 2333 Klattenhoff Dr., Austin, TX 78728 • 512-771-5944 • steve@ntr.net
Photos





The Up Tower J-Box®

- Sizes 1 1/2" and up
- Makes wind turbine installation a breeze
- Built-in strain relief
- Marine/boat versions
- Distributorships available

New

IDC, LLC
(928) 636-9864
idcllc@northlink.com

TRUE SINE WAVE POWER INVERTERS AND RELATED PRODUCTS

- POWER LEVELS FROM 125WATTS TO 60KW
- OUTPUT VOLTAGES OF 100,120,230
- INPUT VOLTAGES OF 12 TO 108
- 20+ YEARS MTBF
- EXPANDABLE
- MODULAR
- REMOTE CAPABLE
- "HOT" SWAPABLE



XP1100

EXELTECH

2225 East Loop 820 North Fort Worth, Texas 76118-7101 voice: 817-595-4969 fax: 817-595-1290
toll free: 800-886-4683 e-mail: info@exeltech.com website: www.exeltech.com


From the Manufacturers of the Track Rack™ Passive Solar Tracker

Introducing the new Universal Slotted-Channel Aluminum Rack.
Continuing 32 years of Simple, High Quality, Passive Solar Products

- Roof and Ground Mount Fixed Racks •



- Corrosion Resistant
- Competitively Priced
- Holds a Variety of Modules
- Light Weight
- Quick Turn-around
- 10 Year Warranty



ZOMEWORKS CORPORATION
1011 Sawmill Rd. NW, Albuquerque, NM 87104
(800) 279-6342 / (505) 242-5354 / Fax: (505) 243-5187
Email: zomework@zomeworks.com Website: www.zomeworks.com
Call us for a dealer near you!



Planetary Systems.com

Setting the **NEW** standard for
Renewable Energy Systems



Our Power Package (P) will change the way
you think about Solar Power.

Providing
Sustainable
Solutions for
Living on
Planet Earth

Offering complete and exclusive power
systems for off-grid, on-grid and sell-back
power. Featuring state-of-the-art components,
arriving at your door-completely tested, UL
listed and ready to operate.

Planetary Systems is now a "Certified Trace Dealer."

Visit our website at www.planetarysystems.com

Phone 406-682-5646 Fax 406-682-5644

P. O. Box 340 262 Badger Road

Ennis, Montana USA 59729

Visa/MC/Amex

(P) Patent Pending

HOME POWER on CD-ROM

Original Magazine Layouts & More

Color • Indexed • Searchable • Exportable • Printable
Adobe Acrobat PDF® format (reader included)

Solar6: two CD set, same price

Issues #77 (June '00) through #82 (May '01)

Over 6,000 pages of renewable energy information: spreadsheets for load analysis, wire sizing, and the Energy Master for system design; classic basic articles from the *HP* archives; 30 years of solar insolation data, wind data for 900 sites in the U.S.; manuals and spec. sheets of popular RE equipment; energy related government publications; the *current In Biz* database; and a searchable index.

Energy Pathways video CD

The basics of renewable energy, including solar, wind, hydro, and solar thermal energy sources, energy storage, and energy use. All in 37 minutes of digital QuickTime video format.

Special Deal: All five CDs for \$125

(Shipping: \$8 USA, \$9 Canada, \$12 International)



\$29

Shipping: \$2 in US
(Canada \$3; International \$4)

SunWorld, the official magazine of the International Solar Energy Society says, "Together these CDs offer the largest collection of useful and practical information on achieving energy independence ever available."

Solar5: Issues #71 (June '99) through #76 (May '00)

Over 1,400 pages of *Home Power*; guerrilla solar video clip; 5 hours of audio lecture (MREF '99) on batteries, inverters, ram pumps, RE system Q&A, and solar cooking; spreadsheets for load analysis, wire sizing, and system design; 30 years of solar insolation data; and the In Biz database.

Solar4: Issues #61 (Oct. '97) through #70 (May '99)


Over 1,200 pages of *Home Power*; 3 hours of audio lecture (MREF '98) on batteries, inverters, and RE system Q&A; video clips from the "RE with the Experts" series; spreadsheets for load analysis, wire sizing, and system design; and the In Biz database.

Solar3: Issues #43 (Oct. '94) through #60 (Sept. '97)

Over 2,000 pages of *Home Power*; 2 hours of audio lecture on batteries and inverters (MREF '97), spreadsheets for load analysis, wire sizing, and system design; an interactive tour of *Home Power* (Funky Mountain Institute); and the In Biz database.

Solar2: Issues #1 (Nov. '87) through #42 (Sept. '94)

Contains the original magazine layouts (text & graphics), over 3,900 pages of *Home Power*.

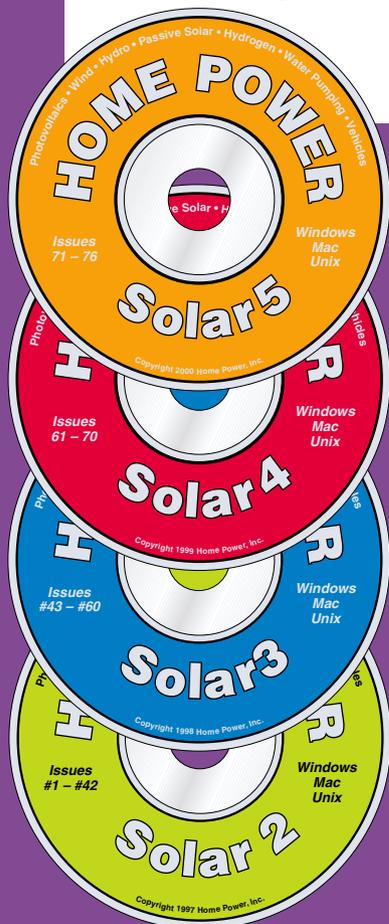

Call 800-707-6585

Home Power, PO Box 520, Ashland, OR 97520

541-512-0201 • fax 541-512-0343 • www.homepower.com



MultiMode-5000

5kW



Maximum Power Point Tracking
Standard Outdoor-Rated Enclosure
Standard 5-Year Warranty

Certified to Meet All UL
Grid-Interconnection Requirements

Certified for the California
Energy Commission Buydown

Grid-Tied Back-Up
Stand-Alone

Integral GFI, Controller and Switchgear
Minimizes Grid-Connect Power Loss
Optional String Combiner and
Battery Enclosure with 175 Amp Breaker

GC-1000

1kW



Integral String Combiner,
GFI, and Disconnects
Combinable to 2 and 3kW
Quiet, Reliable Operation

Grid-Tied

www.advancedenergy.com 603.654.9322 info@advancedenergy.com

Uh oh . . .



Are you bidding against your distributor?

Join the SunWize team – we don't sell retail. And we support you with competitive pricing, lead distribution and technical assistance. Call our Dealer Sales Manager at 800-232-7652 if you are interested in becoming an authorized SunWize representative. We're partners . . . not competitors.



Waterless Solutions

To receive free information, call:

1-800-5BioLet

(800-524-6538) ext. 224

or visit us on the web:

www.biolet.com

- No Water!
- No Sewer!
- No Chemicals!
- No Odors!

Choose from
five models
designed to
fit your needs!



The Practical Solution for:
Cabins & Cottages • Barns • Garages
Pool Houses • Boat Houses
Basements • Nearly ANYWHERE!

BioLet USA, Inc. • P.O. Box 548 • Newcomerstown, OH 43832



Sustainable Living with Southwestern Culture

Rose Marie Kern

©2002 Rose Marie Kern

Bright sunlight greeted the day as the New Mexico Solar Energy Association (NMSEA) hosted their annual Solar Fiesta over the weekend of the fall equinox. A record crowd of 2,275 people came to the two-day event held at the Indian Pueblo Cultural Center in Albuquerque, September 22–23, 2001.

Solar Fiesta, a renewable energy and sustainable building educational fair, featured 42 speakers and classes, 33 booths, a solar scavenger hunt for kids, and a raffle for a 160 watt PV system. Solar Fiesta was sponsored by the Sandia National Laboratories, the Public Service Company of New Mexico (PNM), *Home Power* magazine, and the Alliance for Green Development.

Native Energy

This year's Solar Fiesta was enhanced through cultural participation by the Indian Pueblo Cultural Center (IPCC). It featured performances by Native American dancers in the courtyard of the beautiful adobe style building. With their eagle dance, the Laguna Pueblo Elementary school dancers created a dust devil out of a calm day, sending shade umbrellas flying over the tops of outbuildings.



The Sacred Power 1.2 KW PV system that powered the exhibitors tent and stage.

The IPCC building is powered by a 10 KW PV system. The system is grid tied and net metered through PNM. It was designed by Dave Melton, a Native American engineer, and installed by his company, Sacred Power. This is the largest PV installation on native land in the United States, and the largest commercial array in New Mexico.

Fun & Food

The kids' booth boasted a solar scavenger hunt, where children could pick up a card with questions to answer by visiting many of the exhibits. They had to record the



This industrial-sized solar cooker baked cookies for fairgoers—seven trays at a time.

temperature in the Solar Villager sun oven, visit the Sunchaser educational trailer, watch adobe bricks being made, and then take the completed card back to the booth to receive a prize.

La Mantanita Organic Foods Co-op hosted a solar cooking contest on Sunday, with the winners receiving gift certificates to their store. The first place winner was Michele Godwin of Albuquerque, who baked a rosemary chicken casserole.

Jeanette Moore brought the Sandia National Labs' Solar Villager, a trailered sun oven that stands 12 feet (3.6 m) high and can cook six turkeys, or seven trays of chocolate chip cookies at once! With help from Dave Patterson, Amanda Hodson, and Alisha Hodson, Jeanette was making chocolate chip cookies for two days!

Education

The Solar Fiesta also saw the debut of NMSEA's new energy education trailer, the Sunchaser3. Their program has been so popular that their Sunchaser2 trailer couldn't meet the demand from one end of the state to the other. Both SunChaser trailers contain examples of solar hot water heating, PV and wind electric systems, solar cooking, fuel cells, passive solar home features,

and other sustainable technologies.

Sunchaser3 contains a complete 300 watt PV system, a wind generator, and a stationary bike. All of these tie into output monitors, batteries, and an inverter. Mike Prine has brought the systems up to date, and displayed them for the crowds.

Solar Fiesta included forty classes and two panel discussions. The classes were US\$5 each, or US\$20 for an all day pass. Most of them were set up classroom style, with a few of them including an outdoor demonstration immediately following.

The classes covered all aspects of renewable energy technology, solar building design, and green building techniques, as well as permaculture and organic issues. All of the classes were taught by people who are actively working in these fields.

The Solar Raffle was first seen last year when the grand prize was a small, home photovoltaic system. This year's grand prize was a Firefly plug n' play 160 watt PV system. The winner, Gene Sydoriak of Santa Fe, told us that he was just getting into solar energy, and couldn't wait to experiment with his new Firefly. It features four 40 watt PV panels donated by Matrix Solar Technologies, a Cool Cell battery box donated by Zomeworks, a Sundog battery donated by Industrial

Tire pounding 101—the beginnings of an earthship home.



Battery Specialists, and a Trace inverter purchased at reduced cost from Xantrex. Ron Orozco and Steve Durand of Energia Total donated labor to put the system together.

Energized in the Southwest

I spent eight months of my spare time organizing the Solar Fiesta. Robert Griffin directed the volunteers, and grounds manager was Don Miller. Sunchaser2 was managed by Joe Griffin, with help from Ben Luce. The NMSEA booth was organized by Elaine Prine and Pat Miller.

New Mexico is rich in sunshine, and blessed with wind. The Solar Fiesta is designed to reach out to people who've heard about solar energy and sustainable topics and are hungry to know more. It gives them a taste of what is possible to do right now.

It brings confidence about sustainable living to those who have never before had an arena in which to experiment. Chuck Marken of AAA Solar stated, "This Fiesta was simply the best solar happening I have ever seen in New Mexico, and rivaled the early Midwest fairs in Wisconsin." With enthusiasm like that, we guess we'll just have to do it again!

Access

Rose Marie Kern, Solar Fiesta, New Mexico Solar Energy Association (NMSEA), PO Box 36180, Albuquerque, NM 87176 • 888-886-6765
Fax: 505-271-9546 • info@nmsea.org • www.nmsea.org

Sponsors

Sandia National Laboratories
www.sandia.gov

Public Service Company of New Mexico (PNM) • www.pnm.com

Home Power magazine
www.homepower.com

Alliance for Green Development
www.greenalliancenm.org

Donors

Matrix Solar Technologies
www.matrixsolar.com
Four, 40 watt PV Panels for raffle

Sacred Power
www.sacredpowercorp.com • Power from their 1.2 KW stand-alone system to power the exhibitors tent and stage

Zomeworks • www.zomeworks.com
Cool Cell battery box for raffle

Global Sun Ovens • www.sunoven.com
Global Sun Oven for raffle

The Last Straw Journal • www.strawhomes.com • Video tapes, 3-part series on building with straw bales

Energia Total • www.energiatotal.com • System setup and transport costs for the raffle



Solar Village
Independent Renewable Power

We will design, install and support a Professional - quality power system for you. Choose from micro-hydro, wind and photovoltaic systems or combine any of these to meet your needs and fit your lifestyle. Plus you get trained so you know how it works!

Call us. Tel 800-376-9530
Fax 336-376-1809
Visit our web site
www.solarvillage.com
Located in North Carolina

The best modules under the sun.

Matrix
Solar Technologies

Toll Free: 1-877-2MATRIX
Fax: 1-505-833-0400
E-mail: marketing@matrixsolar.com
www.matrixsolar.com

PHOTOWATT

Solar so easy... your mom can do it!

At Sunelco we make your purchase and installation easy.

Phone or write for our new 14th edition *Sunelco Planning Guide & Product Catalog*.

Regular \$5 value—
Free to Home Power readers.



A Division of Kyocera Solar, Inc.



1-800-338-6844
www.sunelco.com

100 Skeels Street, PO Box 787, Hamilton, MT 59840

Solar Energy International

Colorado Workshops Begin May 6
Contact SEI for a Catalog

Online Workshops:

- PV Design On-line January 21-March 1
- Solar Home Design On-line February 18-March 29

Hands-on Workshops:

- PV Design and Installation Sacramento, CA March 4-9
- Women's PV Design and Installation Santa Cruz, CA March 11-16
- PV Design and Installation Austin, TX March 25-30
- PV Design and Installation The Farm, Summertown, TN April 22-27

Hands-On Education • Sustainable Development

voice: (970) 963-8855 • fax: (970) 963-8866 • e-mail: sei@solarenergy.org • web: www.solarenergy.org
P.O. Box 715, Carbondale, Colorado, USA 81623

Good Things in



Small Packages

Shari Prange

©2002 Shari Prange

The Th!nk City has a fairly conventional appearance compared to some other city cars.

Bigger is better, right? It's the American way. Supersized fast food, big screen TV, monster trucks. We set records for the tallest, the biggest, the longest, the most....

But sometimes, less is more.

“Overdesign” is a concept that can be good or bad. Some things are deliberately overdesigned for their intended use to include a built-in safety margin. This is good. But some things are overdesigned to meet peak demands, even though most of their useful life is spent at much lower levels of demand. Electric power systems, for example, have to be designed to meet expected worst case draw, even though off-peak demand, such as overnight, will be very low.

This can be wasteful. Often, systems operating below their peak are inefficient, which wastes fuel. It wastes resources that are tied up in the oversized equipment. In some situations, such as cars, it also wastes the energy needed to carry around the weight of the oversized equipment, just so it will be there for those occasional times when you actually need it.

Sometimes this waste is unavoidable. But other times, a little thinking outside the box can provide a solution. For example, a busy family might really need two cars. But is it necessary for both cars to be capable of carrying the whole family, reaching freeway speeds, and travelling long distances? Or could one car be a special purpose, efficient vehicle for local use only?

Even a one-car household, such as a couple in a retirement community or a single person living in a city, may not need a conventional car 90 percent of the time. For them, it might make more sense to have a minimalist vehicle, and rent a “regular” car only when absolutely necessary.

City Cars

Last issue, we talked about neighborhood electric vehicles (NEVs). These are very small, four-wheeled electric vehicles, often resembling golf carts. They have a top speed of 25 mph (40 kph), and are perfect for many drivers. Other people want something a little more car-like in appearance, convenience, and performance, but more specialized, compact, and efficient than a conventional car.

The vehicle that fills this gap is the city car. This is a loosely defined term. In general, it means three or four-

wheeled electric vehicles that are much smaller than standard cars, but have fully enclosed bodies, and top speeds that often reach freeway levels—well, at least on some freeways, in the slow lane. There are several versions of city cars currently or soon to be available. Let's take a look at some of them.

Th!nk City

The little car from the big company is the Th!nk City from Ford. This is the “big” brother (relatively speaking) of the Th!nk Neighbor we looked at last time. While the Neighbor clearly showed its golf cart heritage, the City looks pretty much like an ordinary car, only smaller. The two-seater is only 9.8 feet long by 5.3 feet wide and 5.1 feet high (3 x 1.6 x 1.6 m). The hatchback opens on 12.4 cubic feet (0.35 m²) of storage room.

The entire car weighs 2,112 pounds (960 kg), including batteries, and can carry up to 451 pounds (205 kg) of passengers and cargo. The car is built on an aluminum space frame, clad in thermoplastic body panels. A space frame is a type of chassis using a lightweight structure of tubing arranged in cross-braced open cages enclosing the various sections of the vehicle, such as the engine and passenger compartments. As a bonus, the Neighbor's plastic body is resistant to the kinds of minor dents, scrapes, and dings that ordinary cars collect. Overall, the car is 98 percent recyclable.

Safety is always a question in a small car like this. The Th!nk City has seat belts, a driver side airbag, and side intrusion beams in the doors to protect passengers in a collision. The Th!nk currently available meets all European safety standards, but not yet U.S. standards. However, starting in March 2002, a fully certified and crash-tested U.S. version will be available. It will be legal on all streets and highways. Customers who are leasing European standard models will be upgraded to the U.S. model at that time.

The car is powered by a liquid-cooled, 3-phase AC induction motor, mounted as a “direct drive” system. Essentially, this means that it uses a gearbox with only one gear, and never shifts. It draws energy from a 114 volt, 100 amp-hour pack of nickel-cadmium batteries. The U.S. version will incorporate some changes, including different gearing and a shift to sealed, lead-acid batteries, as well as some reprogramming of the battery management system. These changes are intended to improve the efficiency, range, and top speed of the vehicle to make it fully highway capable.

The current pack is recharged on 230 volt power only, since this is the European standard. The U.S. model will carry an onboard charger that plugs into a normal 120 volt outlet, with the option of a wall-mounted 240 volt charger for faster charging. A depleted pack can be charged to 80 percent in 4 to 6 hours, or fully charged in 6 to 8 hours on 120 volts.

The City has a top speed of 56 mph (90 kph), with a 0 to 30 mph (0–48 kph) time of 7 seconds. Its maximum range on a charge is 53 miles (85 km). The U.S. version will expand this to about 70 miles (112 km) range and 65 to 70 mph (104–113 kph) top speed. At present, the City is only available for lease, since the current model is not fully U.S. certified. The U.S. model will be available for sale, but the price is not yet known.

Smart

Another four-wheeled city car is the Smart Car from eMotion Mobility in Atlanta, Georgia. The Smart began life in Europe known as the Swatch car. It was created by Nicolas Hayek, the designer of the Swatch, the color swapping wristwatch that became a fashion craze in the 1980s. The car was intended from the beginning to be electric, but marketing considerations in Europe forced production of the Smart as a conventional gas car. It has been available in Europe since 1998.

Now DaimlerChrysler has formed a strategic partnership with eMotion Mobility to bring the Smart to the U.S. as an electric car. Donald Panoz, owner of eMotion Mobility, is well known in the automotive world as founder of Panoz Motorsports, one of the major players in LeMans style racing.

The Smart will use the same two-seat chassis as the European model, which measures 8 feet long by 5 feet wide by 5 feet tall (2.4 x 1.5 x 1.5 m). The body is a combination of metal and thermoplastic, but unlike the Th!nk's pebbly finish, the Smart is polished, shiny, and smooth.

The Smart Car is shown at a Georgia charging station (left) and flashing its smiley front side (right).

Photos courtesy of eMotion Mobility.



It also will be fully U.S. safety certified, crash tested, and highway capable. The chassis incorporates a sturdy cage for passenger safety. Top speed will be about 70 mph (113 kph), with a range of 60 to 70 miles (97–113 km).

The air-cooled AC induction drive system will be supplied by Solectria, a U.S. company that has been providing drive systems for electric vehicles since 1989. It will be a single-gear, direct drive system. The battery type and pack voltage are still being determined. The car will have an onboard charger capable of accepting either 120 volt or 240 volt input.

There are no plans at this time to make the Smart available for sale or lease to individuals. Instead, it will be used in station car projects in major metropolitan centers across the U.S., starting with Atlanta in 2002. Within five years, eMotion Mobility plans to have 16,000 Smart cars in programs throughout the northeastern U.S. and California. Since the Smart will be marketed only as a station car, it will be sold to metropolitan transit systems, which will acquire a few hundred to a few thousand to service their entire areas.

Something Completely Different

Some city cars fall into a different subcategory of the genre. These are three wheelers. They are generally configured with two wheels in front and one in the rear. One reason for a three-wheeled design is that it increases energy efficiency by reducing both weight and rolling resistance. It also, of course, reduces the cost of manufacturing by one wheel.

Probably the most persuasive argument in favor of three wheels, however, is the reduction of red tape. These three-wheelers are legally classified as motorcycles. In some areas, this has advantages to the owner in the form of cheaper registration, and access to carpool lanes or motorcycle parking. But the bigger advantage is to the manufacturer. The regulations on manufacturers of motorcycles are much easier and cheaper to meet. This allows small companies into a niche of the automotive market that they could not otherwise afford to reach.

Most states with motorcycle helmet laws have exemptions for these enclosed three-wheeled "motorcycles," so you don't have to wear a helmet. Let's look at some of these three-wheelers.

Sparrow

The closest to a "normal" car among the three-wheeled set is the Sparrow from Corbin Motors in Hollister, California. (The Sparrow was profiled in *HP67*.) The Sparrow is kind of a single-seat jelly bean, a rounded shape in bright colors.

Corbin began taking orders for Sparrows in 1997, but startup hurdles delayed delivery of the first units until the end of 1998. Since then, the little bird has undergone changes in appearance as well as drive system.

First, let's look at the outside. The Sparrow is only 8.3 feet long and 4.2 feet wide (2.5 x 1.3 m). You can park four of them in a normal parking space. However, it stands 4.8 feet (1.5 m) tall, giving the driver reasonable visibility. It weighs in at 1,250 pounds (567 kg), and can carry up to 350 pounds (160 kg) of driver and cargo.

The bodies on the first Sparrows ended in a smoothly curved line that extended from the roof down to the rear wheel. While aesthetically pleasing, this did leave the cargo area behind the seat somewhat cramped and oddly shaped. When a pizza franchise wanted to use Sparrows as delivery vehicles, Corbin redesigned the rear by expanding and squaring off the cargo area. The new style was a hit, and became the standard.

More recently, the Sparrow has developed large dimples on its fenders, giving it a resemblance to a neon golf ball designed by artist Salvador Dali. Actually, the Sparrow has dimples for the same reason a golf ball does: aerodynamics. The dimples break up negative pressure zones that create drag.

All of these variations are still considered the Sparrow I. The Sparrow II, due for release in mid-2002, is a major

Evolution provided a longer tail and dimples for the Sparrow I.



departure, with a long, raked windshield and more aggressive, sporty styling. The new version will be roomier, with better handling, and will lend itself to higher volume production techniques.

The Sparrow has a single door, which is placed on the right side for safety reasons. In addition to allowing access from the curb side instead of the traffic side of the car, it also makes the left side—which is more prone to collision damage—stronger. On the Sparrow II, the door opens on a scissors hinge that rotates it upward instead of out into pedestrians or obstructions.

Tom Corbin likes to describe the Sparrow as a motorcycle helmet for your whole body. As a legal motorcycle, the Sparrow is not required to be crash tested, but Corbin is planning to do just that anyway, once production of the Sparrow II is up to speed. Informally, the Sparrow has already been crash tested a couple of times by customers—one of whom was hit by an SUV and rolled twice. In both cases, the Sparrow body shell was scratched but remained intact, and the driver walked away.

One “problem” (if it can be called that) with the Sparrow I involved the production line rather than the car itself. Corbin was unprepared for the number of orders placed for the little cars, which were built one at a time, with the fiberglass hand laid up. By first quarter of 2002, they will have delivered 355 of the vehicles, though many other orders have gone unfilled because Corbin could not keep up with the demand.

With the Sparrow II, Corbin is partnering with SLP Canada in Montreal. SLP will produce the body parts through compression molding with large multipiece molds. The Hollister facility will be the assembly plant. However, there are plans in progress for a completely solar-powered geodesic factory in Florida further down the road.

The Sparrow is powered by a series brushed DC motor and controller system, much like those used in electric vehicle conversions. The battery pack consists of thirteen, 12 volt, sealed, lead-acid batteries for a total of 55 amp-hours at 156 volts. This will carry the vehicle up to 60 mph (97 kph), with a 40 to 60 mile (64–97 km) range.

The Sparrow I was priced at US\$12,900. However, only a few may be still available in the showrooms of



The Twike comes in electric and and electric/human powered versions.

Photo courtesy of SwissLEM.

dealerships. The factory will not build any more after it fulfills its current list of orders. The Sparrow II will sell for US\$16,900 from the factory or from a network of more than fifty dealerships.

Twike

Although commonly called the Twike, the full name of this vehicle from SwissLEM AG in Switzerland is the Twike.You. There are immediately visible differences between this and other city cars, even three-wheelers. For a start, the Twike has two wheels in the rear and one in the front. It's a two-seater, but the seats are front and rear rather than side-by-side. Also, the wheels resemble motorcycle wheels more than car wheels.

The Twike is 8.7 feet long by 3.9 feet wide and 4.1 feet tall (2.7 x 1.2 x 1.3 m). It weighs 542 pounds (246 kg) empty, and 992 pounds (450 kg) fully loaded. The chassis is an aluminum space frame with a thermoplastic body.

When you look closer, more differences become apparent. The most noticeable is the steering joystick instead of a wheel. The next difference you notice is the pedals. I don't mean throttle and brake pedals. I mean bicycle pedals.

You see, the Twike comes in two versions. The Twike.You “Easy” is for lazy souls who simply want to sit back and let the electric motor do the work. For those who would like to save the cost of joining a gym, there's the Twike.You “Active,” in which you can add your own muscle power to that of the electric motor when you feel the need, through a 5-speed hub gear and an automatic pedal clutch. This gives you a bonus cardiovascular

workout whenever you glance in the mirror and see an SUV bearing down.

The electric drive is an asynchronous, 3-phase AC motor. The battery pack is 360 volts, and consists of two or three nickel cadmium modules at 360 volts and 1 amp-hour capacity each. These are connected in parallel, so the total voltage remains 360 volts, while the amp-hour capacity increases to 2 or 3 amp-hours. (The basic setup has two modules, and a third is optional for more range.) These are recharged from a 230 volt, 10 amp socket in about two hours.

This setup can propel the Twike up to 53 mph (85 kph), with a range of 25 to 56 miles (40–90 km), depending on the number of battery modules and your muscle-power contribution. It can tackle gradients up to 22 percent. The Twike is just completing U.S. DOT certification, and should be available in the U.S. in the spring of 2002. Selling price is reported to be about US\$20,000.

Gizmo

Even further afield from “conventional” transportation is the Gizmo, from the Neighborhood Electric Vehicle Company (NEVCO) in Eugene, Oregon. Despite the name of the manufacturer, I’m grouping this with “city cars” because it does not meet the strict federal definition of an NEV, which must have four wheels, and a top speed of no more than 25 mph (40 kph).

The Gizmo has a front two-wheel, rear one-wheel configuration like the Sparrow, but the shape is almost impossible to describe. The cab has removable fabric side and rear panels, for a quasi-convertible effect. To paraphrase Henry Ford, you can have it in any color you want, as long as it’s white, although the fabric panels come in several colors.

The fiberglass body stands 8 feet long, 4 feet wide, and 4.5 feet high (2.4 x 1.2 x 1.4 m). It weighs 660 to 860 pounds (300–390 kg) depending on the battery pack, and has a payload capacity of 250 to 500 pounds (110–225 kg) and 10 cubic feet (0.28 m³). It seats one.

The Gizmo doesn’t have a door. To enter, you unlatch and tilt open the entire front canopy of the cab, and step inside. You can do this because there is no steering wheel in the way. The Gizmo is steered by a pair of push/pull levers that rise on each side of the seat.

Now put the key in... where? Oh, on the floor to the left. This will feel

really weird, except to some Saab drivers. Next, you look for the pedals. There aren’t any. The accelerator is a trigger, and the brake is a motorcycle-type squeeze lever, both mounted on the right steering handle. The left handle has the parking brake.

As you might guess, it’s recommended that you spend some time driving around an empty parking lot before venturing into traffic. If manual coordination and multitasking are not your strong suits, the Gizmo may not be for you.

It uses a series DC motor, driving a single-speed, chain-driven transmission, with a forward/reverse switch on the right side of the cockpit. Since it only has a 48 volt battery pack, it is limited to about 40 mph (64 kph) top speed. This is not one of the city cars that can be taken on the freeway.

There are two primary choices for the battery pack: eight, 6 volt, flooded, lead-acid Trojan T-105s at 225 amp-hours; or eight, 12 volt, sealed Optima Yellow Tops at 110 amp-hours. Both systems are 48 volts, but the flooded pack is a single series string, while the sealed pack is two series strings wired together in parallel. The sealed batteries are lighter, 350 pounds (160 kg) for the pack, and give better acceleration and uphill speed. This is due to the internal design of the sealed batteries, which have lower separator resistance between the plates. The lower resistance allows the batteries to release their energy more quickly. The flooded batteries are heavier, 480 pounds (218 kg) for the pack, but give 45 miles (72 km) range compared to 35 miles (56 km) for the sealed batteries.

The main difference is durability in use. The sealed batteries are much fussier about their charge/discharge profile, and improper driving and charging habits can drastically reduce their cycle life. Even under perfect conditions, they are only good for about 350 cycles, as opposed to 1,000 cycles for the flooded batteries. This is especially relevant since the sealed pack and its attendant charging management system adds US\$1,000 to the price of the vehicle.

The car gets a full recharge from a 120 volt charger in about 8 hours. A 240 volt charger is also available for an extra US\$400, and this reduces charging time by almost 75 percent. According to Ray Holan of Midget Motors, the midwest distributor for the Gizmo, off-grid users can charge the car with about 600 watts of PV panels. The



With a top speed of 40 mph (64 kph), the Gizmo is appropriate for in-town driving rather than freeways.

Photo courtesy of NEVCO.

Gizmo sells for US\$8,650 with the flooded battery pack, and US\$9,650 with the sealed battery pack.

Different Strokes

This has been a sampling of some of the city cars that are or will soon be available. It is not an exhaustive list. If you come across another city car that interests you, a little research would be prudent. There are many “wannabe” and “gonnabe” EVs out there, and some never survive gestation to make it into the real world.

The thing to remember is that not all “cars” are created equal, nor should they be. A Ferrari is lousy for hauling a soccer team, and a minivan lacks a certain thrill, but each is great at what it was designed to do. Any vehicle that attempts to be everything for everybody will be a collection of compromises, and will not be really outstanding at anything.

We each need to take a realistic measure of our own driving needs, and tailor our cars to suit. If you live in a major metropolitan area, ask yourself whether public transit would be an attractive option for you if you had access to a city car at your destination. If so, find out if your area has a station car project. If they don't, ask them why not.

If you think owning a city car might work for you, try keeping a driving log for a month. Record your daily mileage, with notes about road or traffic conditions, passengers or cargo, and top speeds needed. At the end of the month, review it and mark the trips that would not have been possible in a city car. Then think about how often you make those trips, and whether another option, such as a rental car or taxi, might make economic sense for those times.

If you have a multicar household, try designating one car the city car for a month, and don't use it for anything a city car couldn't do. At the end of the month, you'll know a lot more about your *real* driving needs. For some people, a city car might be a perfect fit.

Access

Shari Prange, Electro Automotive, PO Box 1113-HP, Felton, CA 95018 • 831-429-1989
shari.prange@homepower.com • www.electroauto.com

Th!nk Mobility, 5920 Pasteur Ct., Carlsbad, CA 92008
800-252-4221 • www.thinkmobility.com

eMotion Mobility, 1170 Peachtree St., Suite 1200, Atlanta GA 30309 • 404-885-7722 • Fax: 404-885-7744
info@emotionmobility.com • www.emotionmobility.com

Solectria, 9 Forbes Rd., Woburn, MA 01801
781-932-9009 • Fax: 781-932-9219
sales@solectria.com • www.solectria.com

Corbin Motors, 2350 Technology Pkwy., Hollister, CA 95023 • 831-635-1033 • Fax: 831-635-1039
mda@corbinmotors.com • www.corbinmotors.com

SwissLEM AG, Huwilstrasse 7, CH-6280 Hochdorf, Switzerland • 41-41-914-14-00 • Fax: 41-41-914-14-14
info@twike.com • www.twike.com

Neighborhood Electric Vehicle Company (NEVCO), 4068 Stewart Rd., Eugene, OR 97402 • 541-687-5939
Fax: 541-485-4204 • gizmo@nevco.com
www.nevco.com

Midget Motors, 73 Jefferson St., Norwalk, Ohio 44857
419-663-9287 • info@midgetmotors.com
www.midgetmotors.com



Serving Customers Around the World Since 1979

FEATURING: SIEMENS SOLAR PANELS – 25 YEAR WARRANTY – NOW IN 130 AND 150 WATTS

SP-75 Solar panel \$389.00*
ST-5 Solar panel \$60.00*

SP-130 Solar Panel \$686.00*
SM50H Solar Panel \$298.00*

SP-150 Solar Panel \$788.00*
RV KIT 75 Watt \$580.00*

featuring quality products from: Kyocera - Unisolar – Siemens – BP Solar -Direct Power Mounts – Zomework Mounts – Two Seas nts – Morningstar Controllers – Iota Battery Chargers – ThinLite – Exeltech Inverters – TriMetric Battery Monitors – Dankoff Solar ps – Crown Industrial – Coleman Power Station - Trojan - Surrette - Concorde - SunExtender AGM Batteries – Xantrex (Formerly Trace Engineering) – Delta Lightening Arrestors. See our online store for complete pricing.

See our online store at www.solar-electric.com and our technical info website at www.windsun.com

2725 E Lakin Drive, Flagstaff AZ 86004 – 800-383-0195, 928-526-8017, FAX: 928-527-0729

Learn Solar Energy

SOL is "Solar-on-Line"
*Internet-based Distance Courses
with practical skills workshops*

Click on Sol www.solar-on-line.org or www.solenergy.org
Request info by e-mail: SoL@SoLEnergy.org

Or see Happenings in this issue
2002 Schedule Now Available



(renewable energy
educational display)



greenENERGYmachine™




- g** Teacher' Study Guide
Compatible with National Science Standard.
- g** Green Energy Machine
Includes:
35 watt solar cell, 400 watt wind turbine,
sealed rechargeable battery, AC inverter,
voltmeter and separate amp meters.
Produces 5 amps at 110 volts AC when fully
charged.

A Product of 285 Old Country Line Rd., Westerville, Ohio 43081
Energy Designs (614)882-0077 • FAX (614) 882-3189

www.greenenergymachine.com

SUNWEAVER

Design and Installation of Independent & Back-up power
Serving New England Since 1985

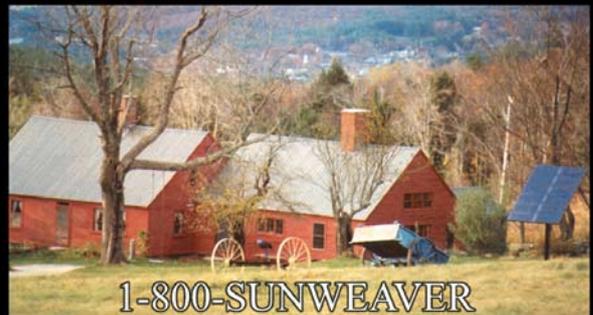

1-800-SUNWEAVER

Route 4 Northwood, NH 03261
Phone: 603-942-5863 ~ Fax: 603-942-7730
Web: www.sunweavers.com ~ e-mail: fonature@tiac.net

Harris Hydroelectric

Hydro-Power for Home Use

Introducing a new adjustable
Permanent Magnetic Brushless Alternator

- 25 - 30% more efficient than Hi Output Alternator
- Marine Grade Construction throughout
- Re-connectable Stator
- Retrofittable on existing turbine




632 Swanton Road
Davenport, CA 95017
831-425-7652



NEW!



Home Power's Business

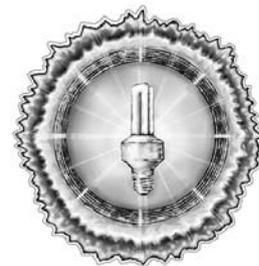

"The man who on his trade relies
Must either bust or advertise."

Sir Thomas Lipton — 1870

Display Advertising

Advertising Rates per Consecutive Insertion

	Single Insertion	Three Insertions	Six Insertions	Ad Area sq. in.
Full Page	\$1,500	\$1,350	\$1,275	64.1
Half Page	\$840	\$756	\$714	32.1
Third Page	\$600	\$540	\$510	21.4
Quarter Page	\$471	\$424	\$401	16.0
Sixth Page	\$334	\$300	\$284	10.7
Eighth Page	\$268	\$241	\$227	8.0
Twelfth Page	\$188	\$169	\$159	5.3

Four process color (CMYK) in any sized advertisement is a flat rate of \$185 per insertion. For inserts, and current subscriber/circulation demographics, please call us.

Home Power is published bi-monthly. The ad deadline for the April / May 02 issue (*HP88*) is Feb. 1, 2002. Call 541-512-0201 for further details.

International *Home Power* Subscriptions

Due to the high cost of international mailing, we charge more for *Home Power* international subscriptions.

1 Year (6 issues) International Rates:

All payments in U.S. currency ONLY!

Canada:	Air — \$43	Surface — \$30
Mexico:	Air — \$46	Surface — \$30
Western Hemisphere:	Air — \$48	Surface — \$30
Europe:	Air — \$64	Surface — \$30
Asia and Africa:	Air — \$77	Surface — \$30
Pacific Rim:	Air — \$77	Surface — \$30

Surface shipment may take up to three months. All international issues are shipped in mailing envelopes. International subs are best paid for by either VISA, MasterCard, or funds from a U.S. bank.

International orders: Call: 541-512-0201
Fax: 541-512-0343

First Class *Home Power* Subscription

Get 6 issues of *Home Power* magazine via First Class U.S. Domestic Mail for \$43. All First Class issues are shipped in an envelope. We start your subscription immediately with the current issue.

Second Class *Home Power* Subscription

Get 6 issues of *Home Power* via Second Class U.S. Domestic Mail for \$22.50. Second Class can be forwarded for one issue (two months), so let us know immediately if you move! Please allow up to ten weeks for your first copy to arrive.

Back Issues of *Home Power* Magazine

Back issues through #20 are \$6.25 each while they last. Back issues of #21–45 are \$7.75 each. Back issues #46–84 are \$8.75 each. Back issues #85 to present are \$9.95 each. (Sorry, no more issues #1–12, 14, 15, 35, 36, 38, 40, 41, 59–61, 63–67, 79, 81, & 82.) Back issues are shipped First Class mail to U.S., Air to International. See the listing under Ad Index on the last page for details and current *Home Power* back issue specials.

Issues #1–42, 43–60, 61–70, 71–76, & 77–82 are on CD-ROMs for \$29 each (Shipping: \$2 in US; Canada \$3; International \$4).

MicroAds

MicroAd rates are 15¢ per character. Characters include numbers, spaces, and punctuation. \$20 minimum per insertion (includes both print and web). Send a check with your ad. We do not bill MicroAds.

Home Power Magazine for Resale

Quantities of *Home Power* magazine are available for resale by distributors, newsstands, bookstores, energy businesses, and others. Please call, email, or write for rates and shipment specifics.

ACCESS ➡ **Home Power, PO Box 520, Ashland, OR 97520 USA**
800-707-6585 or 541-512-0201 Subscriptions and Back Issues
541-512-0201 Advertising and 530-475-3179 Editorial • www.homepower.com



TOP SECRET

GUERRILLA SOLAR: The unauthorized placement of renewable energy on a utility grid.

PROFILE: 0018

DATE: December 2001

LOCATION: Northern Hemisphere

INSTALLER NAME: Classified

OWNER NAME: Classified

INTERTIED UTILITY: Classified

SYSTEM SIZE: 960 watts of PV

PERCENT OF ANNUAL LOAD: 25%

TIME IN SERVICE: 18 months



Strong environmental concerns have driven me to go solar. Oil is much too precious to be burned for heat when trees fall over in the forest and rot away. Here in my area, a good percentage of electrical energy is generated from nuclear plants. They still don't know what they're going to do with the waste from that.

I'm a telecommunications networking engineer. On the roof of my typical suburban home, there are eight Solarex MSX 120 solar-electric panels, with a peak rated output of 960 watts. I use a Trace C40 controller and a bank of eight Interstate, deep-cycle, marine batteries to store the energy. System voltage is 24 VDC. I use an APC Smart-UPS to convert the DC to usable AC. The UPS was going to be discarded due to the fact that its internal batteries were in need of replacement. I removed the internal batteries and wired the UPS to my marine batteries. I now have a constant source of about 600 watts of AC power. I estimate that I'm getting anywhere from 2.5 to 3 KWH of AC electricity from the PV system on sunny days.

Much of the energy stored is used for lighting, phone answering machines, and small devices that are usually on 24 hours a day. In fact, the energy necessary to run the computer monitor I'm using right now comes from the sunshine that falls on those panels.

The heating system in this residence is fueled by biomass (wood) and sunshine. Augmenting the woodstove are five solar hot water panels. All energy for pumps and fans is provided by the PVs on the roof.

The guerrilla part of my system is very simple. I have a MicroSine 100 watt inverter that is tied to the grid. When my storage bank of batteries reaches full charge, the MicroSine inverter feeds the grid with some of the excess energy I generate. The PV panels are directly connected to two devices. One is a Trace C40 charge controller and the second is the MicroSine. They are connected in parallel. The C40 is set to bulk charge to 29.6 volts, and float at 26.8. When the batteries reach full charge, the voltage on the panel side of the charge controller rises and the MicroSine begins to function. There is no switchover, and it is fully automatic. The MicroSine doesn't draw down the batteries because it is on the PV side of the C40.

I went guerrilla because I am reluctant to pay someone for something I can get for nothing with a calculated investment in the proper equipment. If you drive by the front of my house, you'd notice nothing, and I hope the tax assessor feels the same way. They won't even give me a tax break for my investments...

Guerrilla Solar Defined

Energy is freely and democratically provided by Nature. This century's monopolization of energy by utilities both public and private threatens the health of our environment. Solar guerrillas believe that clean renewable energy should be welcomed by utilities. But utilities and governments continue to put up unreasonable barriers to interconnection, pushing common citizens to solar civil disobedience.

Guerrilla systems do not endanger utility line workers (see *HP71*, page 58). They share clean, renewable energy with others on the utility grid, and reduce the need for polluting generation plants. When interconnection for small-scale renewables becomes fair, simple, and easily accessible to all, there will be no more need for guerrilla action.

T-SHIRTS

Guerrilla Solar



Install by Night—Power by Day

On Black: \$15, or Camo: \$18
 Shipping: \$5 USA, \$8 Canada, \$10 International
 Call, see our web site, or send check or money order
800-707-6585 (541-512-0201 Outside USA)
www.homepower.com
 Home Power, PO Box 520, Ashland, OR 97520

Where's Grippy?
 Find Grippy and Show him the Way to Tractel Inc.

For All Your Portable Tower Constructing Needs




Griphoist/Tirfor



Planet Friendly

- Lifting & pulling with unlimited wire rope
- Capacities from 2,000 to 8,000 lbs.
- Perfect outdoor tool
- Uses only armstrong power
- No outside energy source necessary


Tractel Inc.
 Griphoist Division
www.tractel.com / 800-421-0246

got solar?...we do!

Upcoming Workshops Include:

**Solar Space Heating • Wind Systems Installations
 Photovoltaic Installations • Straw Bale Construction
 Masonry Heaters • Sustainable Living Workshops**

Green Building
 Technology

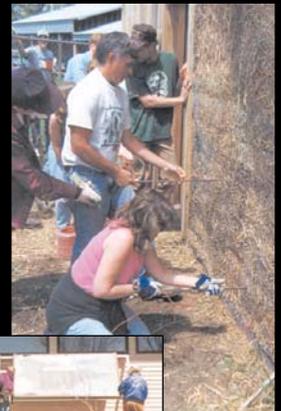

Photovoltaics, Wind, Hydro

**2002 Energy Fair
 June 21-23**



Solar
 Hot Water

Call or write for more information and course descriptions.

Midwest Renewable Energy Association, 7558 Deer Rd., Custer, WI 54423
 phone (715) 592-6595 • fax (715) 592-6596 • mreainfo@wi-net.com • www.the-mrea.org



Solar Wind Works

CA Contractor's License: #796322

Renewable Energy Power Systems

- Sales—PV, Wind, & Microhydro
- Design—Off-Grid or On-Grid
- Full On-Site Installation

Chris Worcester

Toll Free! 1-877-682-4503
 530-582-4503 • fax: 530-582-4603
 PO Box 2511, Truckee, CA 96160
 www.solarwindworks.com
off the grid since 1977!



Proven Energy Solutions for Self-Reliance or Utility Buy-Back



Solar-Powered Web Hosting & Applications Service Provider

The official Web host of Home Power magazine.

www.SolarHost.com


Toll Free 866-SUN-HOST

703-934-9245 • FAX 703-934-9264

SolarHost, technology as nature intended.

Solar Pathfinder

The Best Tool For Solar Site Analysis

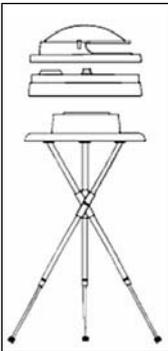

- * Easy to Use
- * Fast & Accurate
- * Diagrams from 0–66° N & 0–49° S
- * Pathfinder with metal case & tripod
\$245, Handheld \$165 (+ shipping)

3680 Hwy 438, Dept HP
 Pleasantville, TN 37147
 Phone & Fax 931-593-3552
 www.solarpathfinder.com



www.discountstovesfireplaces.com



WE'RE UP TO OUR EARS IN HOT WATER!

Introducing the new INFINION affordable tankless instant gas fired hot water heaters. 42,000 to 105,000 btu for \$398.00. Compare to Paloma or Aquastar and save!!




CAN'T FIND A HOT PRO WATER HEATER?

Our new wood fired water stove heats 30 gallons at a time! Helps heat your home! Burns 30 inch logs.

Obadiah's Woodstoves
 & ALTERNATIVE ENERGY

800-968-8604

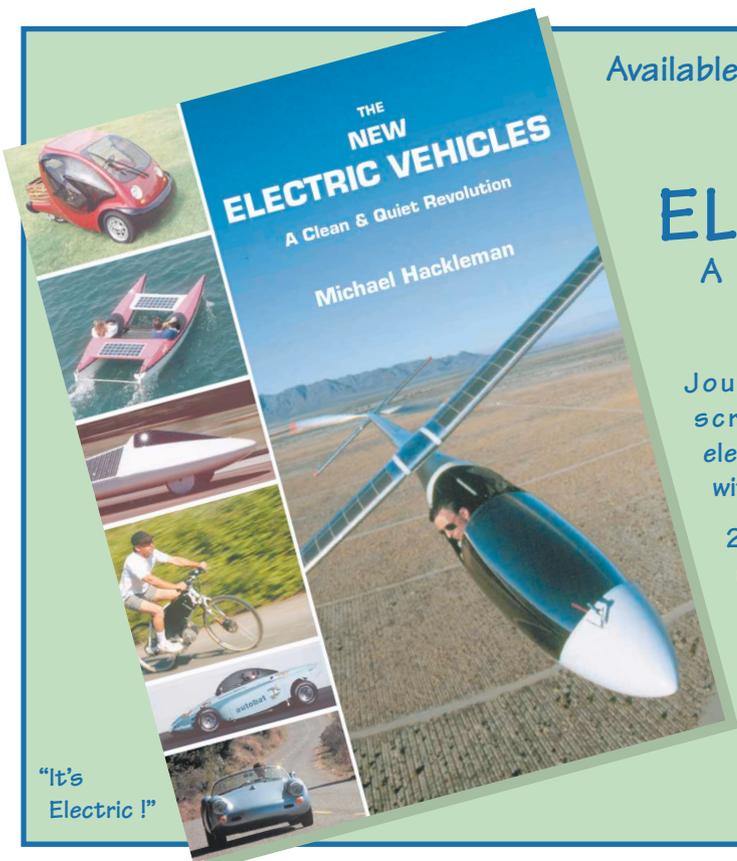

Available Now! Only \$25 (U.S. \$6; Canada \$10; international \$15)

THE NEW ELECTRIC VEHICLES

A Clean & Quiet Revolution
 by Michael Hackleman

Journey into the world of conversions, scratchbuilts, human-electrics, solar cars, electrathon racers, planes & boats—all powered with electricity.

272 pages of EV technology, 465 photographs (over half in color), and detail on 65 vehicles. Includes 115 technical design and construction sidebars.

To order Call: 800-707-6585

Outside USA call 541-512-0201 • Fax: 541-512-0343

or write to:

Home Power Publishing
 PO Box 275 • Ashland OR 97520





**The Original
PV BULK BUY
now has
EVERY DAY LOW PRICES**

<http://www.solarsolar.com>

PV Modules Inverters Complete Systems

We help you every step of the way with expert information.

Questions? Email us at solar@solarsolar.com

SOLutions in Solar Electricity

P.O. Box 5089, Culver City, CA 90231, (310) 202-7882



A PV Education— One System at a Time

Cliff Millsapps

©2002 Cliff Millsapps

I'm a do-it-yourselfer sold on PV power. During the past twelve years, I've been blessed with a positive PV experience. Most of the credit goes to the forgiving and adaptable nature of PV. The rest goes to letting my experience and confidence grow in steps.

My start with PV was an accident. Initially, I was determined to use the wind. I lived in windy South Dakota at the time, so I was going to get a wind generator. I read and thought, and read and thought, but I never got anything done. Wind generators and towers just seemed like a big step to a complacent grid-fed novice.

First System: A Simple PV Powered Water Pump

While I dreamed about wind generators, I bought a PV panel, a linear current booster (LCB), and an inexpensive, 12 volt diaphragm pump. I pumped water to a pond, had backup garden irrigation, and made a stream demo table for an educational science display. These systems were simple and DC—just a nice step beyond my understanding of basic automotive DC.

I was fascinated by how the little LCB started the pump early in the morning and kept it running well into the afternoon, and right through periods of thin clouds. Without the LCB, the pump would only run in the middle of the day, in full sun.

The power (watts) a PV produces is equal to the module's voltage multiplied by its current (amps). Motors need a certain amount of current to start. An LCB uses voltage beyond what the pump needs to make more current (amps) available to start a pump motor. And it keeps the pump running in low light conditions. An LCB also increases pump output in full sun.

Second System: Grid Backup

I soon discovered *Home Power* magazine. *HP*, along with a Solar Energy International (SEI) PV course, gave me the confidence to buy five more PV panels, a 24

VDC Sun Frost refrigerator/freezer, a prototype inverter (PowerStar UPG, 900 watt), a meter (Omnimeter), and a couple of Todd chargers. I found a free set of telephone company batteries, put it all together, and casually continued my education.

The system used six Kyocera, 51 watt PV modules. These and the Sun Frost were quite an investment for my wife and I at the time, but we were excited to put our dollars into something we believed in. Knowing that our refrigeration was solar powered was a good feeling.

Besides being partially renewable energy (RE) powered, I had a good backup system to the grid. When the grid went down in the middle of a good old South Dakota blizzard, we still had electricity.

Forgiving & Adaptable

The idea that you can temporarily short circuit PV modules, and leave them open circuited without damage, makes them ideal for novices. Another beauty is that you can start with one panel, and just add on as you gain confidence and cash.

But keep an eye to the future size of your system. If you plan to increase the size of your system, buy inverters and charge controllers and size your wire with expansion in mind. These are things that are both easier and cheaper when done just once, rather than with each upgrade.

Cutting Corners

I wanted the PV system to pencil out, and I cut corners trying to make it pay back quickly, and be cost competitive to the subsidized grid system. I did this with my initial Sun Frost system (described in *HP39*). I felt that with my new-found knowledge, I could skip a lot of the idiot proofing that added expense to the system.

My decision to skip a charge controller was based on the "knowledge" that I had a small PV system (six, 50 watt panels) and a relatively big battery bank (about a ton) with a fairly consistent load (Sun Frost). The batteries were twenty-four, 2 volt, telephone company type, lead-acid cells. The stored energy was regularly being removed by the Sun Frost, and the capacity of the battery bank kept it from being overcharged by the comparatively small PV array.



The PVs' top-of-pole mount eliminated the potentially dangerous roof mount.

Then one day after a fresh snow, the sun came out. The cold temperatures, crystal clear atmosphere, and highly reflective snow provided a combination that supercharged my PV system. We were really cranking out the juice. By noon the next day, I noticed the voltage creeping up toward the high end of the range recommended for the Sun Frost.

This was a little unexpected, but I said, "Ha, I'll just disconnect the Sun Frost to play it safe." Well... at a common junction, the wire terminal end to the battery was pulled off the connecting bolt a second or two before the terminal end to the Sun Frost was pulled free. The instant the voltage-buffering battery was removed, the voltage in the line to the amp-sipping 24 VDC Sun Frost jumped to more than 30 volts.

Even DC Sun Frosts have sensitive electronics, and the automotive type fuses they use only protect them

The tall pole is steadied just below the deck with cables.



from high current, not high voltage. I fried at least one compressor and one electronic control unit. I replaced both compressors, and had a refrigeration guy recharge the system. I replaced the electronic control unit myself.

Do your system right! I'm still not code pure, but I think it is smart to work toward a code-compliant system, and build all new systems to code. If you can't afford to do the system you are hoping for correctly, do a smaller PV system first. Start with a vanilla system, and take on the complexities, one step at a time.

Good Batteries

The free batteries in my initial system were messy, prone to corrosion, and didn't have very much capacity for all that weight. Their only redeeming value was what I learned while attempting to salvage them. I later got a new set of eight Trojan L-16s (700 AH at 24 VDC), which was a real luxury. They have more capacity in a much lighter package, with a fraction of the terminals, and hardly any corrosion per terminal. In fact, when I finally got the L-16s, I was too careful with them.

Never pamper your battery bank more than your sweetheart! After we moved off the grid later on, and were looking at cloudy weather and a battery bank not even drawn down 25 percent, I was over cautious and started to curtail our already basic (relative to middle America) use of electricity. Darlene was all for cutting back, but when there were unexpected cutbacks, on top of the expected cutbacks, it became too much like camping.

Balcony Solves Roof/PV Hassles

Another thing I found to be a real hassle with my original system was where I chose to mount the panels—on the moderately steep roof of our story-and-a-half farmhouse. The roof is often the place people go to reach that solar window above the trees and other obstacles. The downside is cleaning snow off the panels in the winter, readjusting panels, and revamping the panel setup. These all were uncomfortable, dangerous, and frustrating experiences.

I built a balcony off the upstairs bedroom. By using a 5 inch pipe as one of the supports, and allowing it to extend up high enough, I had a mast for my PV rack. Steel pipe comes in 21 foot (6.4 m) lengths, which got the top of the mast up about 8 to 9 feet (2.4–2.7 m) above the balcony deck. The wind load on a rack of

several panels, on top of a tall pole, can create a lot of leverage, so I cabled the pole to the house. I included turnbuckles so I could easily adjust cable tension.

The rack was attached to a 3 to 4 foot (0.9–1.2 m) length of 6 inch pipe, with a cap welded on it. It is easy to loosen three set-bolts and rotate the 6 inch pipe with its attached PV rack, on the 5 inch support mast. This is handy if you have a day when you really need to track the sun and produce all the energy possible. You can use separate bolt holes in an adjustment arm to seasonally change the slope or inclination of the panels.

Before building my own, I called the main manufacturer of similar mounts. I was ready to buy. I just needed to find out the offset, the center point, and the radius that the panel moved through. Then I could make sure that the rack wouldn't hit, or be shaded by the edge of the roof. The manufacturer didn't have time to answer my questions, so I got huffy and decided to build my own rack. It was educational and came out fine, but it seemed a waste to do the engineering for just one rack. I would encourage the next guy to push the mass manufacturer a little harder than I did.

Third System—PV for Off-Grid Construction

The rack I built had expansion potential to ten panels, which was farsighted, since we eventually packed up everything and moved to an off-grid property in Tennessee. Ah yes, PV is portable. Middle America didn't want my solar-assisted rural acreage in South Dakota, so I just took the PV system with me. (No, I never did get that wind system working up on the windy plains. I had bought a little Air 303, but never settled on what to do for a tower.)

In moving our PV system south, its modest size made things much less formidable. I had the electronic components and component wiring all mounted on a sheet of 3/4 inch (19 mm) plywood. All I had to do was disconnect the Sun Frost, the PV panels, and the AC circuit from the inverter, and take the sheet of plywood off the wall.

To pluck the rack mount off the balcony mast, I got a tree trimmer to bring in his big bucket truck. I had originally put the mount onto the pole with a makeshift extension on the loader bucket of my farm tractor. But the ease and peace of mind was worth the US\$60 for the bucket truck.



Moving the PVs wasn't too hard with the help of this cherry picker.

When we got to Tennessee, we immediately wanted to crank the solar-electric system back up. All we had to do was provide some temporary shelter for the batteries and the components on the plywood sheet, slide the rack of PV panels off the trailer, turn them to face south, and hook everything back up. Don't give me grief about code compliance. It was this or use a hand saw or a noisy rented generator. I accepted the risks, and everything went fine.

Inverters

Three months prior to leaving South Dakota, I had sent my old modified square wave inverter in for an upgrade. Move time came and it was not back, so I bought a Trace DR2424 modified square wave inverter. It was just as well, since I don't believe that the old inverter would have given the desired service. I kept it for an emergency backup.

**PV is portable!
The upgraded system at its off-grid
location in Tennessee.**



Millsapps Systems Costs*First System*

<i>Item</i>	<i>Year</i>	<i>Cost (US\$)</i>
Kyocera PV panel, 51 watt	1990	\$295
Bobier Electronics LCB, 7 amp	1990	100
Flojet pump, 12 V, diaphragm	1990	93
<i>Subtotal</i>		\$488

Second System

Sun Frost RF19 refrigerator, 24 V	1993	2,275
5 Kyocera PV panels, 51 W	1993	1,500
Todd charger, 12 V, w/ adjustable pot	1993	157
Todd charger, 12 V	1993	116
Education: Sun Frost repair	1994	500
PowerStar inverter, 24 V, 900 W	1994	500
Omnimeter (meter w/ very fuzzy logic)	1994	350
4 Shunts, 100 A, 100 mV	1994	96
Trace C30 controller	1994	80
Heinemann breaker, 100 A	1994	40
Pole mount with adj. rack, 22 ft. tall	1996	500
8 Trojan L-16 batteries	1997	1,400
<i>Subtotal</i>		\$7,514

Third System (Water)

Dankoff Slowpump, 12 V	1998	\$485
PVC pipe, 250 ft., fittings, valves, hydrants	1998	320
Poly repairable tank, 1,000 gal.	1998	245
Backhoe	1998	175
Trencher	1998	160
3 Concrete culverts	1998	75
Bobier Electronics LCB, 7 amp (replacement)	1999	85
<i>Subtotal</i>		\$1,545

Going Gridless Upgrade

4 Kyocera PV panels, 51 W	1998	\$1,625
Trace DR2424 inverter, 24 V	1998	934
Welding cable, 20 ft., #2/0, plus lugs	1998	35
<i>Subtotal</i>		\$2,594
<i>Grand Total</i>		\$12,141

Trace developed a sleep or search mode for its inverters, which substantially reduces the power drawn by the inverter when it's just sitting there idling, waiting for a load. In search mode, the inverter's output is limited to the small pulses it sends out about once a second.

These pulses are "looking" for a load. If a load is sensed, the inverter's output comes up to full voltage to power the load. The sleep threshold, or size (wattage) of a load large enough to bring the inverter out of sleep mode, can be set by the user.

On the DR inverter, the sleep threshold can be set between 0 watts (always "awake") and about 100 watts. But household wiring has resistance. So do appliances, even when they're turned off. The inverter's sleep circuit senses this combined resistance as a tiny "load." And the amount of this combined resistance varies with changes in temperature and humidity. As a result, I periodically need to fine-tune the DR inverter's sleep threshold so that it starts up with a real load, but doesn't stay on (humming) because of changes in resistance in the household wiring and appliances.

My unit would benefit from having a larger knob with more sensitive tuning capability. You can turn the knob all the way in one direction to make the inverter stay on all the time, which is necessary for running some fluorescent lights and charging cordless tool batteries. The Trace has charged my DeWalt cordless drill many, many times, but the one time I forgot to shut the sleep mode off, it fried the battery I was recharging.

Also, if the sleep mode is on, and nothing else is pulling juice, there is a momentary lag between pulling the trigger or flipping the switch, and the next time the Trace checks and sees a load. This takes some getting used to.

Fourth System—Water Pumping Again

After getting some basic shelter squared away on our new property in Tennessee, the next project was the water system. The water system taps a spring that is at a lower elevation than the building site. I used a concrete culvert as a stilling well, and used a 12 volt Dankoff, vane-type, Slowpump to push the water to a 1,000 gallon (3,800 l) poly holding tank. The tank is about 60 feet (18 m) higher elevation than the well, and 25 to 30 feet (7–9 m) above the building site.

I buried 3/4 inch PVC from the stilling well to the house, and 1-1/2 inch PVC from the house to the tank. I like the idea of a gravity pressurized water system, and the big line can really put out the water at the the building site (great for fire protection). Again, pumping water is a nice PV project. The components are few, it's reliable, it doesn't take an electronic wizard to set it up, and often it is the most cost-effective means.

For power, I used a couple of old hammered panels. One was a "bronze quadlam" that had the glazing caramelized by concentrated sun in an early utility-scale PV installation. I dragged it around for years on a mobile electric fence charger. The sheep ran over it, and the tractor banged into it, busting the trim loose.

The other panel had the glass honeycombed years ago, by me whapping the edge with a stick trying to get the 1/2 inch of ice glaze off. It is really hard to kill a PV panel. Considering the abuse these had, it is amazing that they work at all. I'll guess that these panels have lost less than 30 percent of their output compared to when they were new.

I wired the PVs in parallel and mounted them on a makeshift cedar rack. I found a hole in the tree canopy, wired the PV panel to the pump with an old hefty extension cord, and I was pumping water.

Of course I used an LCB, but learned that inside the humid concrete stilling well was a poor location for it. My LCB quit working after a couple of months. I left it sitting out in the sun for a few days and it started working again. It was probably moisture that caused the failure, although it died for good after another month in a drier location.

Moving Again

Before we could get started building the real house, we ended our gridless experience. We moved to a started home (exterior shell completed) with the grid attached, and the previous cabin, shop, and property sold. The lender for the buyer seemed willing to loan an additional amount for the solar-electric system, but didn't have an appraiser that could provide an evaluation. There's a service business opportunity here for someone willing to establish agreements with lenders, and do some traveling.

At any rate, the new cabin property owner opted to start out with a generator. I left all the components of the water pumping system, but moved the main PV system to our new location to eventually be used for grid assist. For the present, I have just set the system up as a grid backup. I am waiting to get and try a new experimental transfer switch that will watch the battery, and will seamlessly and automatically switch between grid and RE, relative to programmed conditions. This will save me many headaches if it works.

PV for Plain Communities

We've moved into an area where there are Plain communities (Amish and Mennonite) living largely without electricity. They are a disciplined group of families who take a strong stand against forces they see as potentially damaging to family and children. They want interdependence within their families and their communities. Horses are the primary source of farm power, and horse and buggy the primary means of travel.

These people can get along quite reasonably without electricity most of the time, so why couldn't we do with less until I expanded our system? My wife Darlene tried my idea, bless her heart, but she led me to see that this wasn't a camping trip. She pointed out that the Plain families had accustomed themselves to other means of providing lighting, refrigeration, clothes washing, etc.

Traditionally, kerosene lights and the Honda gas engine have been the mainstay for nondraft power around the Plain farmstead. The Honda can be used mechanically for most everything, including running the washing machine, irrigation pump, and grain grinder, and yes, it is even occasionally used to drive an electrical generator. Their beef isn't with technology in general, but has to do with a concern for the family and community unit. If they feel that a certain technology pulls members of their family or community away, or reduces their need for each other, they say no to that technology. Hmm.

At any rate, the PV panels' reliability, durability, and improving relative cost, have made them attractive to the Plain communities around here. They are a sensible means of getting rid of the smell and fire hazard of kerosene lights. I've seen PVs sprout up in several yards of Plain families during the past year.

These systems are usually just a single panel or two. They provide modest lighting, charge up the buggy's signal light battery, or power a cordless drill. It's only a matter of time until the noisy, smelly Honda gets a rest, and a handful of panels takes on the load.

The Future

Looking down the road with a global perspective, I hope we move toward millions of small grid-tied RE systems. The place to put these preferable, but still ugly, power producers, is alongside, or on top of the blemish of our own homes.

I used to preach about the merits of wind farms, until they started wanting to put one up close to some farm ground I own in northeast South Dakota. The rugged, open, and uncluttered nature of the area is dear to me. I want the raw landscape, the huge skyline, the sunrises and sets, just the way they are.

No, I wouldn't rather have a nuclear power plant to make up the shortfall. What I would rather have, as soon as possible, are cheap PV roofing panels. Make up the shortfall with PV electricity, made where it is used, during the day when most of it is used. It's certainly worked for my family, in a succession of homes.

I started with just a small amount of equipment. As I learned, I expanded and improved my systems. I was able to apply the lessons I learned from one system to the succeeding systems. And I used some components from each system for the next generation. I'm still using some of the equipment I started with back in South Dakota. You, or anyone, can start with the basics, grow a system as you learn, and adapt it as necessary. So why not get the rest of the population hooked on PV?

Access

Cliff Millsapps, Solar Pathfinder, 3680 Hwy. 438, Pleasantville, TN 37147 • Phone/Fax: 931-593-3552 pathfind@mlc.net • www.solarpathfinder.com



INTRODUCING...

The NEW ProStar Solar Controller



- 15 or 30 amp
- 12/24 or 48 volt
- negative or positive ground

PROSTAR

a revolution in 1995 & again in 2001
all NEW technology providing exciting NEW features!

MORNINGSTAR
corporation

1098 Washington Crossing Rd., Washington Crossing, PA 18977 USA
Phone: 215-321-4457 • Fax: 215-321-4458 • www.morningstarcorp.com

Learn about Cuba's award-winning renewable energy program & other projects in sustainable development in Cuba

April 1 to April 6 2002

Fifth International Renewable Energy Conference

US Delegation March 29 - April 7
Contact: Pam Montanaro, Global Exchange
510-486-1050 or pam@globalexchange.org
www.globalexchange.org/campaigns/cuba/sustainable/index.html

Hosted by Cuba Solar
Pinar del Rio, Cuba
www.cubasolar.cu

SIEMENS



Solar Power Your Dream.

You've finally found just the right spot. A little out of the way, but good water, good soil, and even a little view. You're going to build.

Find out now just how easy it is to have a solar system to meet all or part of your electrical needs.

See Your Siemens SolarPowerPro™

Siemens can help turn your plans into reality. An economical Siemens solar system can give you year after year of trouble-free electricity. And do it silently, without fuel, waste or pollution.

Office (520) 636-1001
Fax (520) 636-1664

P.O. Box 365, 2655 N. Hwy 89
Chino Valley AZ 86323



HITNEY SOLAR PRODUCTS, INC.
Harmony with Nature

RENEWABLE ENERGY with the EXPERTS

An Instructional Video Series
on the Basics of Residential Renewable Energy

Residential Solar Electricity
with Johnny Weiss, 48 min.

Johnny Weiss is one of the founders and teachers at Solar Energy International, in Carbondale, CO.

\$39.95
each

Residential Wind Power
with Mick Sagrillo, 63 min.

Mick Sagrillo has installed and repaired over 1,000 wind turbines.

Residential Microhydro Power
with Don Harris, 44 min. Don Harris has designed and manufactured over 1,000 microhydro power plants.

Batteries with Richard Perez, Editor in Chief and founder of *Home Power* magazine.


Solar Water Pumping with Windy Dankoff, 59 min. Windy Dankoff has been designing and installing solar-powered water pumping systems for 15 years.

Shipping \$5 USA, \$6 Canada, \$10 International

Home Power, Inc., PO Box 275, Ashland, OR 97520
toll free in USA: 800-707-6585 • 541-512-0201

Fax: 541-512-0343

Web: www.homepower.com

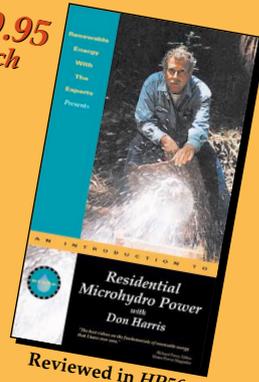

Reviewed in HP56

Back Home MAGAZINE

Your Guide to Self-Reliant Living

Take control of your own life. Thousands of people have gone BACKHOME to enjoy less complicated, more rewarding lives . . . and you can join them. In each bimonthly issue, find articles on topics such as: Alternative Home-Building Techniques, Organic Gardening, Selecting a Home Business, Living Mortgage Free, and much, much more!



Subscribe to BACKHOME for just \$21.97 per year. Call us at 800-992-2546, write to us at P.O. Box 70HP, Hendersonville, NC 28793 or visit our Web site

www.BackHomeMagazine.com

100% Cotton Good Shirts!

T-Shirts

Full Color on Natural Shirt
\$15.00

Sizes:
S, M, L, XL, XXL

Shipping:
\$5 USA,
\$8 Canada,
\$10 International

To Order Call: 800-707-6585
(541-512-0201 Outside USA)


Or see our web site:
www.homepower.com

Or send check or money order to:
Home Power Magazine
PO Box 520, Ashland, OR 97520

Our website has free information on "Using a battery monitor to help maintain your battery system, conserve energy and troubleshoot problems."

The TriMetric TM-2020

For beginning or intermediate level, our website explains the basics of "volts", "amps", and "amp-hours" for people who are new to electricity. We have information on maintaining your batteries and hints on minimizing your generator usage. The website also describes how the TriMetric measures the energy content of your batteries. We list complete TriMetric instructions, information on shunts, and troubleshooting meter installation problems. Some files are in "Adobe Acrobat" format. Or mail us \$1 for postage and we'll send you (the old fashioned way!) the information on "Using a battery monitor..."

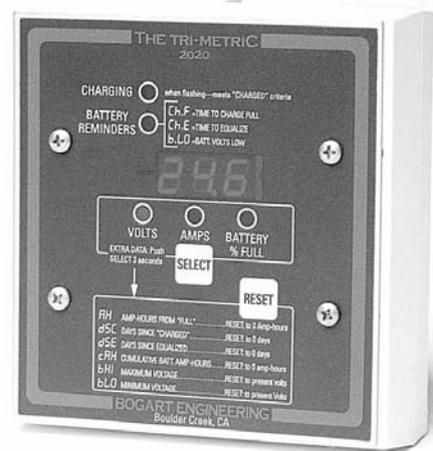

BOGART ENGINEERING
 19020 Two Bar Road, Boulder Creek, CA 95006
(831) 338-0616
www.bogartengineering.com

Measures: battery volts, amps, % full (based on amp-hours), battery lifetime total amp-hours, highest and lowest battery voltage, days since fully charged, and days since equalized. Mounts in standard "double gang" box (optional).

Under \$200 including shunt.

THIS SALE BEATS ALL!

Limited Quantities

Subject to Change

New 90 watt modules
 Made in USA by Photowatt
 25 year limited warranty
 CE-listed
 16.8 volts @ 5.4 amps
 52.6" x 26.5" x 1"

← YOUR CHOICE →
\$4.25 per watt
 ...and if that don't beat all,
 call TOLL-FREE
 to negotiate...

New 75 watt modules
 Made in USA by Solarex
 Warranty through 2009
 UL-listed
 16.7 volts @ 4.49 amps
 43.8" x 26" x 2"

Half-price poletop racks!

DP&W brand. Each rack holds 10 Solarex 75's (or adapt for others) ~~\$695~~ **\$347**

Free customer services: Module voltage configuration; "terminal tags" for easy hookup; wire gauge sizing advice.



Wholesale & retail sales of PowerPulse® "sulfation-busters"
 ■ Covered by 1979 patent
 ■ 5 year warranty
 ■ U.S. Military approved
 ■ Used and recommended by Richard Perez
 12 volt \$69.95 ■ 24 volt \$119.95
 48 volt \$179.95
 Call for delivered prices.

Got solar SURPLUS? Call Mick Abraham 8 to 5
970-731-4675 ■ 800-222-7242
 Over 17 years experience; We know installations.
Abraham Solar Equipment
 124 Creekside Place
 Pagosa Springs, Colorado 81147
 All major credit cards accepted. © 2001 Abraham Solar Equipment

Extend The Life Of Your Batteries!

THE POWER BROKERS™



Installing EV Gauges, Part 2—Wiring

Mike Brown

©2002 Mike Brown

In my column in *HP85*, I covered electric vehicle (EV) gauge selection. Last issue, I covered mounting the gauges in your vehicle. Now that you have the gauges mounted, you need to wire them to the parts of the EV drive system that they are monitoring.

This wiring involves both the high voltage traction battery pack and the vehicle's original 12 volt electrical system. So we should take another look at some wiring basics.

Never the Twain Shall Meet

The vehicle's existing 12 volt electrical system powers the lights, turn signals, wipers, radio, and the low voltage part of the drive control system. It uses the chassis of the car as its negative or ground path.

On the other hand, the traction battery pack and the high voltage components of the drive system must be isolated from the chassis of the car for proper operation, as well as safety. The motor, controller, battery charger, and all the other high voltage components do this internally.

The wires and cables that connect the parts of the high voltage system make up both the positive and negative paths of the high voltage circuit. They "float" above the chassis, with no electrical connection to it. The gauges you are installing are an instance where both systems come together in a small area, and the potential for problems exists.

The Right Wires & Connectors

Smaller gauge wires are usually where mistakes are made, failures occur, and accidents happen. It is a mistake to use any wire size less than #16 (1.3 mm²) in

a conversion. Smaller gauge wires have less physical strength and thinner insulation. It is also harder to crimp a crimp-on connector on smaller gauge wires, due to the difference between the wire's outside diameter and the inside diameter of the connector's barrel.

Another common mistake is using the wrong connector size, usually by trying to crimp too large a connector on too small wire. The result is a mangled connector barrel from over-crimping the connector to get a tight crimp on the small wire.

The insulation on the connectors is color coded to tell which gauge wire it should be used on. A red insulated connector is made for wires from #22 to #18 (0.3–0.8 mm²), but I find it to be a perfect fit for #16 (1.3 mm²) as well. A blue insulated connector is nominally for #16 to #14 (1.3–2.1 mm²) but I find it a little big for the #16. It will also accept two #16 wires twisted together if you need to daisy chain several components to a common power source or ground. A yellow insulated connector is for #12 to #10 (3.3–5.3 mm²) wires, or two #14 (2.1 mm²) wires twisted together.

Connectors are sold with different insulating materials (vinyl and nylon), and different barrel styles (single crimp and double crimp). I prefer the connectors that have a metal barrel over the bare wire, and a longer metal sleeve that covers both the connector barrel and the wire's insulation. The whole barrel and sleeve assembly is covered by molded-on, color-coded nylon insulation.


This connector has to be crimped twice—once to crimp the barrel and sleeve to the wire, and once to crimp the sleeve to the wire's insulation. I've found that the nylon insulation holds up better during crimping than the vinyl, and I like the extra strength the second crimp on the wire's insulation gives the connection.

Recycling Original Wiring

There are a lot of surplus wires left over from the old gas or diesel system that could be used to connect the gauges to the places in the electric drive system where they pick up their signals. But finding them under the dashboard and pulling them out of the wiring loom is a lot of work. Once found and separated, they will probably not be long enough to reach the location of the new EV gauges. In general, I have found it easier to run new wires between the gauges and their pick-up points.

If your donor vehicle has warning lights that indicate trouble with the charging system or oil pressure, these lights and the wires between them and the former engine compartment *can* be adapted to EV use. Both of these lights come on when the ignition key is turned on. The charging light goes off when its ground is removed

EV Wiring, Including Gauges

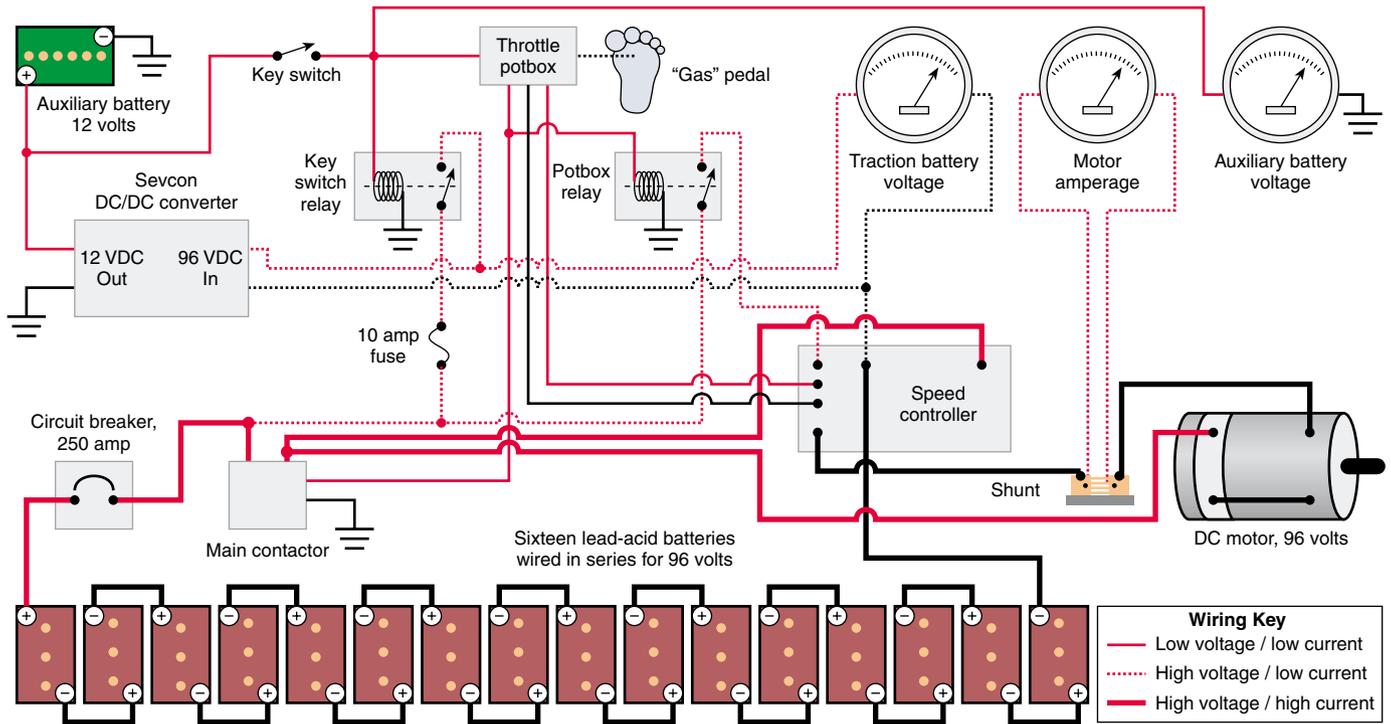

by the alternator starting to charge the battery. The oil pressure light goes off when the oil pressure switch is opened by pressure in the engine's lubricating system.

You can rewire the alternator light so that the wire that used to go to the alternator now goes directly to a chassis ground, which will turn on the light with the ignition key. Since the ignition switch also supplies power to the low voltage side of the EV control system, you now have a light in the dash telling you that your silent EV is turned on.

The former oil pressure light can be turned into a motor overheat warning light. Most of the electric motors used in conversions have two small wires coming from a hole in the side of the motor. These wires are attached to a temperature switch mounted inside the motor between the field coils. This is a normally open switch that closes at temperatures ranging from 120 to 180°C (248–356°F). The closing temperature varies from manufacturer to manufacturer.

If you connect one of the motor wires to the oil pressure light wire, and the other motor wire to a chassis ground, you will have a light in the dashboard that will warn you if your motor is in danger of damage from overheating.

Bench Work

The place to start the wiring process is with the gauges themselves. Because working in the confined space under and behind a car's dashboard is no fun and likely

to cause wiring errors, I prefer to do the wiring of the gauges themselves on the workbench.

As we determined in the first article of this gauge series, the gauges you will be installing are a battery pack ammeter, a battery pack high voltage meter or state-of-charge gauge, and maybe a voltmeter for your 12 volt accessory battery.

On the workbench, install the gauges in the mount so you have the best view of the ammeter. Next, pick out the wire insulation colors you are going to use for the high voltage positive and negative wires, the two ammeter wires, the wires to the auxiliary battery voltmeter (if you are installing one), and the 12 volt positive and ground for the gauge lights. Record these color codes in your project notebook.

Try to follow the car's original color protocols when possible. For example, on German cars, the ground is usually brown, while on American cars, it's black. For wires that have no corollary in the car's original system, arbitrarily pick a color for each part of the circuit, and be consistent. I use blue for high voltage positive, yellow for high voltage negative, and green and white for the shunt. Pick something that matches your decorating scheme.

Now you can hook up the gauges, following the manufacturer's instructions. When cutting the wires for the high voltage voltmeter and the ammeter, cut them

long enough to go through the firewall and extend out into the engine compartment a couple of feet. The wires for the auxiliary voltmeter and the gauge lights don't have to be as long because they will be hooked up under the dashboard.

In the Car

Install the wired gauge and mount assembly in its place. Run the four wires for the high voltage voltmeter and the ammeter through a factory original grommet in the firewall or through a new grommet in a hole drilled for them. The grommet is a rubber donut that protects the wires from sharp cut edges of sheet metal. There is often enough room in factory grommets to squeeze through one or two more wires.

Now you can go back under the hood and finish connecting the gauges to what they are measuring. Locate a convenient place on the firewall, and install a terminal block that has enough spaces to accommodate the wires from the gauges. Run the wires coming out of the grommet in the firewall up to the terminal block and cut them to length. Next, crimp suitable connectors to the wires and fasten them to the terminal block. As a finishing touch, gather the wires into a loom, and tie them together with tie wraps at regular intervals.

Now you can run the wires from the terminal block (which you can see and reach easily), along existing wiring looms that you can secure them to, and to the terminals on the components where they pick up their signals. Dividing the gauge hook-up wires into two parts with the terminal block makes the job easier and more accurate. It also cuts down on the amount of wasted wire, since you don't have to run a lot of extra "just to be sure."

Ammeter Connections

The ammeter measures the electrical current passing between the batteries and the motor. It gets its signal from a device called a shunt. A shunt is a precision resistor. The 50 millivolt, 400 amp shunt or the 50 millivolt, 500 amp shunt used in electric vehicles drops 0.125 or 0.1 millivolts, respectively, for each amp passing through the shunt. The amp gauge is scaled to show this millivolt drop in terms of DC amps.

The shunt allows us to measure 400 to 500 amps running through #2/0 (67 mm²) cable from the batteries to the motor, without actually having a current through the gauge. The millivolt signal being taken off the shunt can easily be run through two #16 (1.3 mm²) wires.

The shunt should be located in the power circuit between the motor negative terminal of the controller and the negative terminal of the motor itself. In this position, it reads motor current, which is the most accurate measurement of energy use. It is also the first thing manufacturer's motor and controller technicians

want to know when they are trying to troubleshoot a problem.

When cutting the ammeter wires at the shunt end, make sure that each wire will reach either small terminal on the shunt in case you have to reverse them to get the gauge needle to move in the right direction. Some gauge manufacturers aren't very clear on which hook-up pin goes to the load side of the shunt. So you have a 50/50 chance of getting it right the first time, with no harm done if you get it wrong. Due to the size of the signal and the fact that it is attached to only one leg of the high voltage circuit, it is not necessary to fuse these wires.

Battery Pack Voltage

The battery pack voltmeter or state-of-charge meter needs to be attached to the battery pack's most positive and most negative terminals. This does not mean directly to those terminals on the batteries themselves. Connecting to the battery terminals can be impractical and unreliable.

In most EVs, the battery pack is split into two or more individual packs at different ends of the vehicle. Either the most negative or most positive battery terminal ends up at the rear of the car. This would make for a long wire run for one leg of the voltmeter wiring.

Another reason for not connecting the voltmeter leads directly to the battery terminals is corrosion. It has been my experience that any small gauge wire and connector attached directly to a battery terminal attracts corrosion that wouldn't form if there was only a #2/0 (67 mm²) lug attached to that terminal. It doesn't take much corrosion to eat through a #16 (1.3 mm²) wire.

The cable from the most positive terminal of the pack always ends up at the positive side of the main contactor. This is the place to connect the positive wire for the voltmeter. The only problem with this location is that it is always connected to the battery pack, and a voltmeter hooked to it will always be on. Since it is neither necessary nor desirable that the voltmeter be on at all times, use a small relay that is closed when the EV is turned on to connect the meter to the contactor. Due to the high voltage involved, you should add a fuse in the #16 (1.3 mm²) wire that runs from the positive main contactor terminal through the relay to the meter.

I usually connect the voltmeter's negative lead to the battery negative terminal of the controller, which is where the cable from the battery pack's most negative terminal ends up.

Accessory Battery Voltmeter, Lights, & Tach

The accessory battery voltmeter, if you are using one, gets its positive voltage from the key switch when the

key is turned on. The best place to pick this up is at the vehicle's existing fuse block. Use your factory shop manual's wiring diagram to determine which fuses are controlled by the key switch, and hook your positive gauge lead to a terminal on the load side of the fuse. Like all 12 volt accessories, this voltmeter gets its ground from the vehicle's chassis.

One of the advantages of automotive style gauges is that they can be lighted. To do this, the positive wire for the bulb is piggybacked onto an existing dash light to take advantage of the dimmer feature of the car or truck's dash light system. The negative side of the circuit goes to a chassis ground.

If you have a tachometer you want to use, tach drives are available for sale. If you want to build your own, I have a circuit diagram I can send you. These are optical drives that count the blades of the motor's cooling fan, and turn that count into a signal that your existing tachometer thinks is coming from the original engine. They are powered by the car's 12 volt system.

As always, if you want to discuss this subject further or have any other technical questions, feel free to phone, write, or e-mail me. This column is meant to be a two-way conversation. Talk to me.

Access

Mike Brown, Electro Automotive, PO Box 1113-HP, Felton, CA 95018 • 831-429-1989 • Fax: 831-429-1907
mike.brown@homepower.com • www.electroauto.com



**African Wind Power
The AWP3.6 is in STOCK !**

This 11.8 ft wind genny is available for immediate shipment at \$2350 (24 or 48v), including Controller and Dump load. Tower prices have been reduced.


We also have a Long Case Jake ready to ship. This is your chance to have a completely remanufactured masterpiece.

New and used towers available.

Abundant Renewable Energy
22700 NE Mountain Top Rd.
Newberg, OR 97132
(503) 538-8292
www.AbundantRE.com

**NEW ENGLAND
SOLAR ELECTRIC, INC.**

401 Huntington Road, PO Box 435
Worthington, MA 01098
1-800-914-4131



\$16.95 plus \$3 PPS
(includes our \$3 catalog)

This is the most popular book for PV remote homes. It is written and published by New England Solar Electric Inc.

"Best all around book on wiring your PV system."

Real Goods Sourcebook

"Our favorite book for Do-It-Yourselfers."

Windy Dankoff, Dankoff Solar Products

"This should become the bible for alternative energy users."

Ken Cox, Trace Inverters

Send \$3 for our 80 page catalog and product guide

Servel/Dometic Gas Refrigerators. Trace Inverters. Trojan Batteries. Siemens & Solarex PV modules, Osram Bulbs. Thinlite Fixtures
AquaStar Hot Water Heaters. AIR 403 Wind Generators

**Best book, most user friendly catalog,
& best kits in the business.**

PowerPod™
corporation
Box 321 Placerville, CO 81430

- Modular integrated solar energy systems

Use for:

- lighting
- communications
- water pumping

- small & large PowerPods with inverters up to 4000 watts AC
- small units are easily transported
- energy efficient lights & appliances also available
- Made in USA pat.#420,973

Sundance Solar Designs, our sister company, offers complete renewable energy system design/consult, sales & installation services. Home & Ranch. Solar, wind & hydro.

www.powerpod.com
1 888 786-3374

CONTACT:
 EARTH SOLAR, LLC
 4504 S. GEORGIA STREET
 AMARILLO, TX 79110
 806-359-9005
 FAX 806-355-0585
 WWW.EARTHSOLAR.COM
 E-MAIL CONTACT@EARTHSOLAR.COM

Earth Solar

POWERFUL SOLUTIONS



1-800-329-3283

We carry the full line of Trace products at blowout sale pricing!!!
 Call for your low quote.

Lowest prices in the nation!!!



KYOCERA

UNI-SOLAR

Bekaert ECD Solar Systems LLC

Solar Modules Blowout Sale

KC120 - 120 Watts \$525
 KC80 - 80 Watts \$365
 KC60 - 60 Watts \$286
 KC40 - 40 Watts \$214
 KC35 - 35 Watts \$189



US64-64Watts \$319
 US42-42Watts \$219
 US32-32Watts \$182
 US21-21Watts \$146
 US11-10.3Watts \$107
 US5-5Watts \$58
 US3-2.8Watts \$48



XL 1-\$1595

Bergey has units up to 10 Kw for everything from water pumping to grid intertie. Call us for all your wind generator needs.

Dedicated to a cleaner "greener" earth.

STATPOWER

(modified sinewave inverters, model indicates power in watts)

Notepower 75-\$61
 Prowatt 150-\$62
 Prowatt 250-\$90
 Prowatt 800-\$371
 Prowatt 1500-\$532
 Prowatt 2500-\$815

(true sine wave inverters, model indicates power in watts)

Prosine 1000W 12V -\$645
 Prosine 1800W 12V -\$916
 Prosine 2.5Kw 12V -\$1876
 Prosine 2.5Kw 24V -\$2028
 Prosine 3.0Kw 12V -\$2199
 Prosine 3.0Kw 24V -\$2355



Southwest Windpower

Renewable Energy Made Simple

Air 403-\$465
 Air 403 Marine-\$685
 Whisper H40-\$1417
 Whisper H80-\$1825
 Whisper 175-\$4780
 Windseeker 503-\$890

Call for Tower kits

UNIRAC heart interface bp solar

If you're looking for fast, expert, inverter repair performed by expertly trained technicians, using the latest state of the art test equipment, visit:

WWW.INVERTERREPAIR.COM

or call toll free

866-52-FIXIT

or

888-647-6527

INVERTERREPAIR.COM

is a division of Solatron Technologies Inc.

*Bringing you the power of the sun
 at down to earth prices*

From the Fryer to the Fuel Tank

The Complete Guide to
 Using Vegetable Oil
 as an Alternative Fuel



Joshua Tickell

Fuel any Diesel vehicle, generator, or engine with vegetable oil!

Complete instructions, photos, diagrams, parts lists, and resources for:

- Running a diesel on **Straight Vegetable Oil**
- Making Biodiesel from Used Cooking Oil
- Building a Small Scale Biodiesel Processor
- Growing Oilseed Crops
- Diesel Vehicles



The Veggie Fuel Video...

Follow Joshua Tickell as he makes biodiesel from used cooking oil with easy-to-read, onscreen instructions.

Book or Video \$29.95ea. (Outside USA add \$5)
 Book & Video Combo \$46.95 (Outside USA add \$7)
 1-800-266-5564 or 419-281-1802 (24 hrs/day)
<http://www.veggievan.org/book.html>
 U.S. check or money order payable to:
 BookMasters, P.O. Box 388, Ashland, OH 44805

Watt-hour Meters

Computer Readable & Stand Alone Models

Measure Power Flow in both directions
Ideal for solar and wind systems



Davidge Controls

583 N Refugio Rd, Santa Ynez CA 93460
(800) 824-9696 • www.ezmeter.com

Do You Need Batteries?...

RAE Storage Battery Company

Since 1943... Quality & Service

Surrette Solar 1, 400 Series, Type CH 375 - L16

Engineered under careful guidelines
by Dave Surrette - Family owned
business Est. 1935

Dyno Batteries

Custom Built Superior Deep Cycle Batteries
from M. Knowlton family Since 1933.
Seattle, Washington

**If you need Competitive Pricing
& Prompt Delivery call:
860-828-6007**



Fax 860-828-4540
51 Deming Rd., POB 8005,
Berlin, CT 06037



BATTERY BOX VENTILATOR & BACK DRAFT DAMPER

- Positive hydrogen venting
- Stops back drafts
- Keeps batteries warmer
- Minimal power consumption
- Available in 12, 24 or 48 VDC
- * Trace SW Inverter or controller required to switch fan on/off automatically



POWER VENT
12v & 24v - \$79
48v - \$104
+ \$8 S&H (cont. U.S.)
CO residents add 3%



Zephyr Industries, Inc.
POB 52, Salida, CO 81201
719.530.0718
www.zephyrvent.com



ABS Alaskan, Inc.


Alternative Energy & Remote
Power Products for Alaskans

- ▶ Solar Panels
- ▶ Wind Turbines
- ▶ Micro Hydro
- ▶ Generators
- ▶ DC Lighting
- ▶ Inverters
- ▶ Controls
- ▶ Meters
- ▶ Batteries
- ▶ Accessories

And all your other home power needs!

Fbks: ABS Alaskan 2128 Van Horn Rd. (907) 452-2002
Anch: AK Battery Mfg. 166 E. Potter #2 (907) 562-4949

Or visit us on the internet at:
★ <http://www.absAK.com/> ★

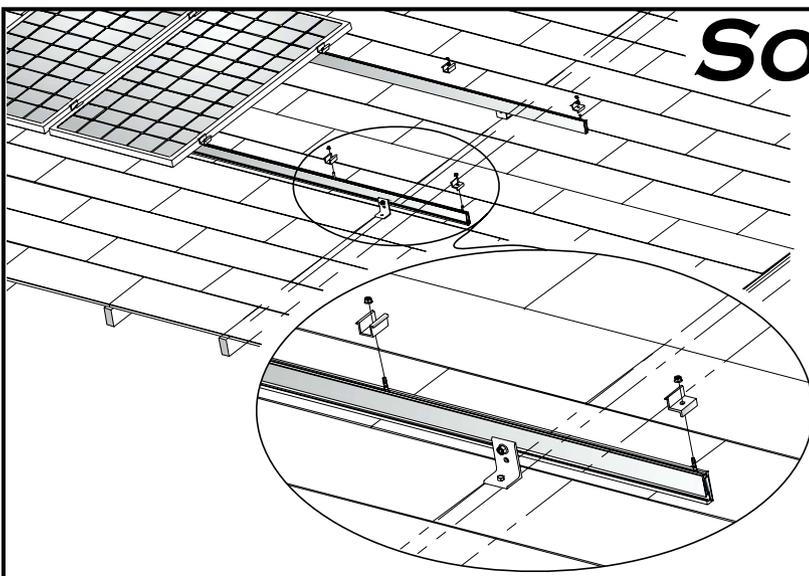

SOLAR MOUNT™

The easiest, fastest, and safest way to
install a PV array on virtually any roof.

Call today for details
(505) 242-6411
or E-Mail: info@unirac.com


UNI RAC®

UNIRAC, INC.

2300 BUENA VISTA, SE, SUITE 134
ALBUQUERQUE NM 87106 USA

PHONE: 505.242.6411 • FAX: 505.242.6412

WWW.UNIRAC.COM

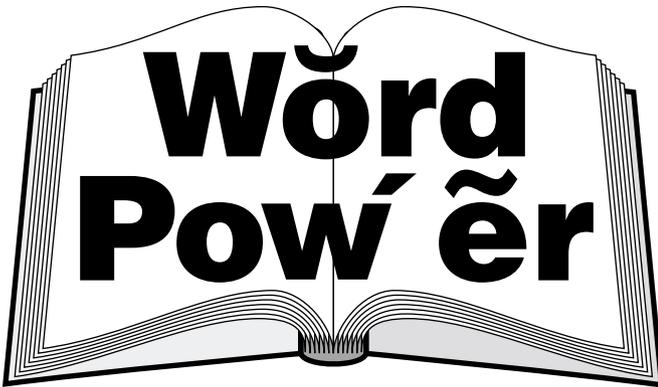

Renewable Energy Terms


Electricity: An Analogy

Ian Woofenden

©2002 Ian Woofenden

For a long time, folks have been wrestling to come up with a comprehensive analogy for basic electrical terms and functions. With help from a variety of smart people, I think I've come up with something. I hope it helps you visualize things, and clears up some of the confusion caused by the misuse of electrical terminology.

Volts ~	water pressure
Ohms ~	resistance of the pipe, fittings, and mill
Amps ~	gallons per minute
Amp-hours ~	total gallons through the mill
Watts ~	grain ground per minute
Watt-hours ~	total grain ground

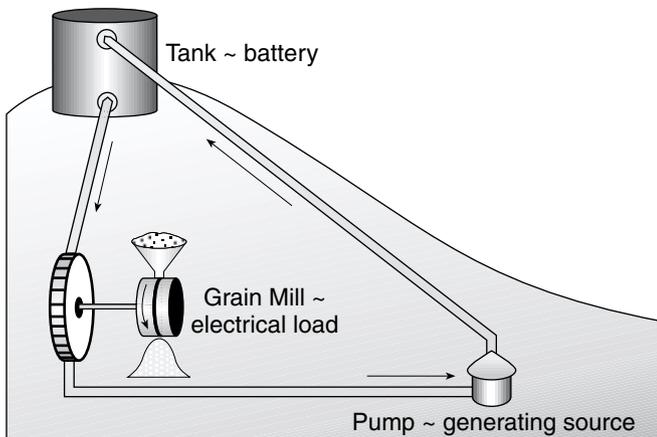

In the diagram below, the pump is analogous to the generating source—PV, wind generator, etc. The tank is analogous to the battery in a simple DC system. The plumbing represents the wires, and the water represents the charges or electrons that flow in the wires.

Volts are analogous to pressure in the water pipe. It's the “push” that gets the water up to the tank, and the same “push” that the water in the tank exerts on the pipeline down to the mill. Ohms are analogous to the resistance of the pipe walls and fittings, and of the pump, battery, and mill.

Amps are analogous to gallons per minute of water flowing in the pipe. An amp is the rate of charge flow (coulombs per second). Amp-hours are analogous to the total gallons pumped through the system. An amp-hour is accumulated charges over a period of time.

Notice that this is a closed loop system. There's a certain amount of water in the system, and it just flows around and around. In the same way, charges in an electrical circuit flow around and around. They are not “used up,” nor do they flow out the end of the wire like water out of the end of a hose.

Two things flow in an operating electrical circuit—charges and energy. In this analogy, the water system is showing only the flow of charges (you can think of them as electrons). To get to the flow of energy, I've introduced a grain mill, powered by water (representing an electrical load, powered by charges).

Watts are analogous to the grains per minute being ground by the mill. It's the rate of energy transfer. The energy is transferred by the charges, but it travels instantly from source or battery to load in a one-way trip. Energy is applied to the system at the generator, and the grain mill instantly grinds some grain. A watt is the rate of energy flow (joules per second).


Watt-hours are analogous to the total grain that has been ground—energy used. The charges drive the mill, and the energy is instantly transferred from the pump (generating source) or tank (storage device) to the grain mill (electrical load). A watt-hour is energy generated or used over a period of time.

All analogies are imperfect in one way or another. Or as one scholar said, “All models are wrong. But they're useful.” I hope this one helps sort out a few of the mysteries of common electrical terms.

Access

Ian Woofenden, PO Box 1001, Anacortes, WA 98221
 Fax: 360-293-7034 • ian.woofenden@homepower.com



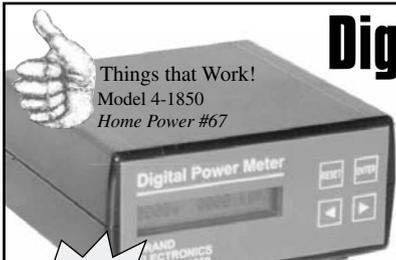

Things that Work!
Model 4-1850
Home Power #67

Digital Power Meter

Measures Watts & Watt-hours (kW-hr)

Simple to use.
Plug the Power Meter into any AC outlet, and plug the appliance to be measured into the Power Meter. That's it!

Real Plug n' play!

- Measure REAL (true) power 1 to 1850 Watts
- Measure power used, 1 Watt-hr to 9999 kilo-Watt-hrs
- Measure cost (\$), just enter cost per Kilo-Watt-hr
- Calculates average monthly cost
- Compare appliances for energy savings
- Find parasitic loads
- NEW backlit LCD display now standard!

NEW: Model 20-CTR...
measures any supply/load 100-250 vac, up to 40 amps, 1 or 2 phase. Perfect for grid tied inverters. See our website, or call for details.

Prices start at \$149.⁹⁵ Model 4-1850 Many models available.

Brand Electronics
421 Hilton Rd.
Whitefield, ME 04353
For information only, call 207-549-3401
info@brandelectronics.com

To order, call toll free
1-888-433-6600
www.brandelectronics.com

Inverter Service Center



Service repairs and technical help performed on most models of Trace and Heart inverters.

Contact: P.J. Gonzalez
127 Industrial Dr., White House Tn. 37148
Ph. 615-672-5459 • Fax 615-672-8084
E-mail pgon@bellsouth.net



HYDRO-COIL

Get yourself into Hot Water


Stainless Steel Water Heaters

More than 30% of your wood heat is lost up your chimney. Hydro-Coil can show you how to convert your wood stove into a water heater, saving you money and energy.

www.hydro-coil.com
(530) 272-5096

UP HILL

PUMP WATER uphill with no gas or electricity. It's possible with the FLEMING HYDRO-RAM or SOLAR pump.

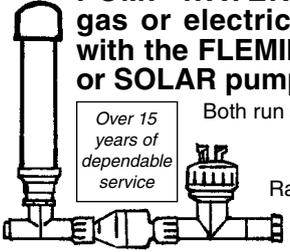

Over 15 years of dependable service

Both run on Free Energy—Sun or Gravity.
Water your Garden or Livestock.
For INFO send \$5.00 to:
Ram Company, 512 Dillard Hill Rd.
Dept. HP, Lowesville, Va 22967
1-800-227-8511

VISA
Master Charge

Radios & Flashlights - Educational Toys - Nifty Stuff - Lights

neatsolarstuff.com




If it is SUN and it is SOLAR we have it at NeatSolarStuff.com!

Order On-Line Today! Dealers Welcome.
www.neatsolarstuff.com
Call: 1-866-247-6527 hpmag@neatsolarstuff.com

Do We Make DC Power Systems?

- DC Standard Dimmer
- DC 2-Wire Dimmer
- DC Motor Speed Control
- DC Fan Speed Control
- DC Linear Power Supply
- DC Voltage Reducer
- DC Voltage Doubler
- DC Delayed OFF Switch

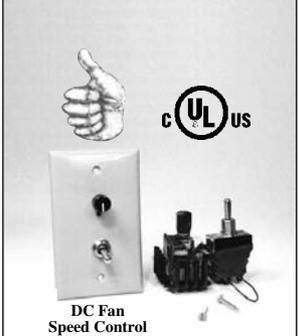

DC Fan Speed Control

Sold Through Leading Distributors, Wholesalers, and Retailers

ZANE
DC Power Systems Since 1990

510 Fruitvale Court #B, Grand Junction, CO 81504 (970) 523-5170
Fax: (970) 523-5170 Made in USA www.zaneinc.com

Window Quilt™


Insulating shades can add R-4.5 to your existing windows.

Control your comfort at skylights, solariums and vertical windows.

Automation and motorization available for quilts and sunscreens.

For an estimate, fax, call or send your window measurements to:

SOLAR INTERIOR DESIGN
Ray Pokorny, 242 NE 61st Ave., Portland, OR 97213
Fax: 503 238-9995 • Toll Free: 888 765-2741
email: solarint@mail.imagina.com

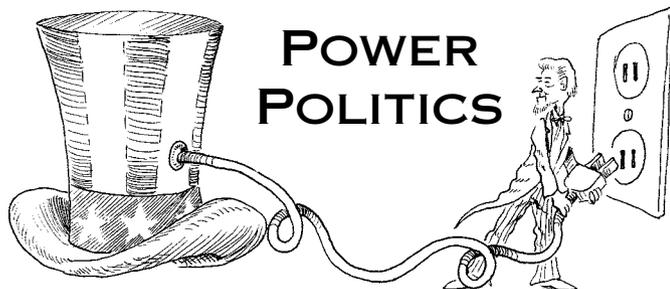

Nuclear Cities & A Pipeline War

Michael Welch

©2002 Michael Welch

Early in November, forty-one tons of high level nuclear waste, in the form of irradiated reactor fuel, were delivered to Zheleznogorsk in the Krasnoyarsk territory of Siberian Russia. The fuel came from an electric power reactor in Kozlodui, Bulgaria.

Bulgaria is on the southwest shore of the Black Sea. While the routing details are considered a state secret, antinuclear activists are certain that the irradiated fuel rods were shipped by rail around the Black Sea, through Ukraine, and across much of Russia to south-central Siberia. This is the first shipment of many intended for this and one other formerly secret Siberian "nuclear city."

Nuclear Cities

The cold war left a lot of problems for Russia, especially for its secret weapons outposts. Several cities like Zheleznogorsk were so secret that they appeared on no maps. Mail to entire cities was quietly routed through postal boxes in nearby, publicly known towns. The cities were kept secret because they contained the nuclear and chemical facilities that we so often hear about in the former U.S.S.R. They became known as nuclear cities.

Entire regions were supported by big spending on these facilities and other Cold War projects. But then the Soviet Union collapsed from that same overspending and other political pressures. The collapse of the system left behind a legacy of unemployment,

contaminated ecosystems, and the possibility of terrorist groups obtaining nuclear scientists and nuclear materials.

Similar Danger for the U.S.?

It is scary to consider that our own economy may be only a few decades behind the failed Soviet economy. U.S. politicians continue to buoy up our nonproductive war economy through exorbitant spending on the military, which produces no net gain for our society. It may be only a matter of time before it comes back to bite the citizens of the U.S. and other nations, just as it did in the former U.S.S.R.

Our apparent prosperity is not lost on Russian politicians as they look for new ways to bring money into their cities. They figure that as long as they have places like their already contaminated nuclear cities, there must be some way to cash in. That same concept of cashing in extends to the displaced scientists, bringing us the fear that they will sell out their knowledge and weapons to terrorists with ill will towards the U.S. That, of course, would be illegal, and would have potentially devastating consequences.

What isn't illegal is that Russia last summer began to set itself up to become a repository and reprocessor of nuclear waste from the rest of the world. While eastern European nations had long sent their radioactive waste to the Soviet Union, a 1992 law banned expansion of those arrangements. A 1997 agreement allowed that recent Bulgarian shipment, supposedly still under the 1992 law.

In the Russian Backyard

But this summer, the Russian Parliament passed a new law that would open the country to accepting waste from countries not included in the old law. Now Russian and international environmental and antinuke activists fear that lots of nuclear nations will try to take advantage of this situation.

The fears are not unfounded. There is hardly a nuke nation in the world that is not worried about what to do with their reactor and weapons waste. There is even speculation that the U.S. nuclear industry is interested, since their own Yucca Mountain, Nevada nuclear waste repository may never be opened.

As you might imagine, the Russian citizenry is dead set against importing nuke waste. Politicians are largely ignoring polls showing that 80 to 90 percent of Russians are against the importation plan. Even though this recent shipment was approved under the old law, Russian environmental activists saw it as a symbol of things to come, and an opportunity to protest the law before newly approved waste shipments began rolling in.

Russian politicians argue strongly in favor of the economic benefits of dumping the world's waste in Siberia. They estimate that two sites can be made ready for storage within three years, and that a reprocessing facility could be completed by 2020. They claim that they can make an estimated US\$20 billion by importing 20,000 tons of waste in the next decade. And they talk about using those profits to clean up the Russian environment. Yeah, right.

Greenpeace calculated that by the time the money is collected and the facilities paid for, there would be only US\$10 left per Russian citizen from the multibillion dollar deal. Meanwhile, about 140 grams (5 ounces) of deadly nuclear waste per capita would be accumulated under the plans. Russians know that they and the environment are getting screwed.

According to a November 10 article in the *Moscow Times*, Greenpeace activists participated in a protest of the plan and the government's unwillingness to discuss the shipment routes. They gathered in front of the Nuclear Power Ministry building, demanding a halt to nuclear waste imports to Russia. They installed a symbolic gravestone and put up a 10 meter (33 foot) banner reading in Russian, "Stop Nuclear Slavery in Russia."

Activists also gave ministry officials a fake nuclear waste container. And a model of a section of the Trans-Siberian Railway was shown to point out that there was a 14 car train derailment on the railway around the time the 41 ton shipment was coming through.

Of course, Russian officials would not release the train schedule so that an accident with the nuke train could be confirmed or denied. Other reports from Russia had the train accident occurring three days after the nuke train came through. Either way, it shows how serious a problem it is to transport such dangerous materials over those vast distances.



Edited map courtesy of U.S. Central Intelligence Agency as found at www.lib.utexas.edu/maps/

Pipeline through Afghanistan?

While we're in the Asian neighborhood, I want to comment on what is beginning to be uncovered as one real reason we are fighting in Afghanistan—the placement of an oil pipeline. Such a pipeline could open up a huge reserve of oil in the Caspian Sea area to the largely oil-starved areas of south-central Asia. And U.S. oil companies want to build and operate the pipeline.

According to the U.S. Department of Energy's Energy Information Administration, "Afghanistan's significance from an energy standpoint stems from its geographical

Caspian Region Oil Production, Exports, & Reserves

Country	Production (1,000 BBLs per Day)			Net Exports (1,000 BBLs per Day)			Oil Reserves* (Billion BBLs)		
	1990	2000 Est.	2010 Possible	1990	2000 Est.	2010 Possible	Proven	Possible	Total
Azerbaijan	259	280	1,200	77	155	1,000	4 - 13	32	36 - 45
Kazakhstan	602	693	2,000	109	452	1,700	10 - 18	92	102 - 110
Russia**	144	11	300	0	7	300	3	14	17
Turkmenistan	125	148	200	69	83	150	1	80	81
Uzbekistan	86	152	200	-168	16	50	1	2	3
Totals	1,216	1,284	3,900	87	713	3,200	19 - 36	235	239 - 270

* Excludes Iranian oil, since it is not politically available

** Includes Astrakhan, Dagestan, and the North Caucasus region bordering the Caspian Sea

Data from United States Department of Energy

position as a potential transit route for oil and natural gas exports from central Asia to the Arabian Sea. This potential includes the possible construction of oil and natural gas export pipelines through Afghanistan, which was under serious consideration in the mid-1990s. The idea has since been undermined by Afghanistan's instability."

There you have it in a nutshell. Years of civil strife and Russian invasion have contributed to Afghanistan being among the poorest and most politically unstable nations. Everyone, Taliban and Northern Alliance fighters alike, wants to see an economic change. (For political/geographic information, see the U.S. Central Intelligence Agency's *World Factbook* for Afghanistan at www.odci.gov/cia/publications/factbook/geos/af.html.)

Afghanistan does not have a lot of gas and oil itself, and local production steadily decreased in the '90s. Its greatest potential for wealth and influence lies in the transport of oil. Oil from the Chardzou, Turkmenistan refinery, and the Russian western Siberian oil fields that it is linked to, needs to be transported to Pakistan's Arabian Sea coast. Other gas and oil pipelines are also being considered. But before any can be built, rule needs to be consolidated into a factionless governing body that is both friendly to the West and stable. It remains to be seen if the Northern Alliance can produce such a government.

Afghanistan's southern neighbor, Pakistan, is as close to a U.S. ally as there is in the region. If U.S. oil interests can pull off the planned 1,000 mile (1,600 km), million barrel per day Central Asian Oil Pipeline Project, Pakistan might become the economic and political leader of the region, and under U.S. control. The demand for oil and gas there is largely unmet.

Incredible profits can be had in the region, much more than by shipping the oil west and north and ultimately to Europe, where demand has pretty much leveled out. Increasing oil availability in Europe would only serve to

lower prices and profits. If the oil gets moved through Russia to the west and Europe, it would enhance Russian power and control, while leaving Western oil interests out in the cold. It would also make it more difficult for our ally Pakistan to become a larger Asian force.

Of course, there is no way that the U.S. would allow the oil to be pumped through Iran, another route to the south. The U.S. government is still trying to isolate that regime. Besides, the big point is that more money can be made by piping to the oil-starved south, rather than to the oil-rich Persian Gulf.

War for Oil Profits

In case there is still doubt as to why President George W. Bush and his cohorts are really in Afghanistan, here is what our own Vice President Dick Cheney had to say to oil industry executives in 1998 while he was still an oil company executive: "I cannot think of a time when we have had a region emerge as suddenly to become as strategically significant as the Caspian."

A statement by John J. Maresca, a U.S. ambassador under the previous Bush administration, gives even more perspective on the current war. During 1998 Congressional hearings, Maresca, currently with Unocal Corporation, the leader of the consortium of oil companies calling for the pipeline, said: "The territory across which the pipeline would extend is controlled by the Taliban, an Islamic movement that is not recognized as a government by most other nations. From the outset, we have made it clear that construction of our proposed pipeline cannot begin until a recognized government is in place that has the confidence of governments, lenders, and our company."

There is still plenty to be said for the idea of wiping out a terrorist organization, especially one that is such an immediate threat to U.S. civilians. But it may have been our own oil-tainted politicians and media that pushed us to leap from finding Osama bin Laden to wiping out

Afghanistan's Taliban. Was there really a need to take that extra step, other than for oil company profits? I'm not so sure. We definitely can't rely on this oily administration to be truthful about it.

Access

Michael Welch, c/o Redwood Alliance, PO Box 293, Arcata, CA 95518 • 707-822-7884
 michael.welch@homepower.com
 www.redwoodalliance.org

Ecoline Anti-Nuclear Campaign, PO Box 211, 121019 Moscow, Russia • (095) 2784642, 7766546, 7766281
 ecodefense@online.re • www.antiatom.ru

Greenpeace International, Keizersgracht 176, 1016 DW Amsterdam, The Netherlands • 31-20-523-62-22
 Fax: 31-20-523-62-00 • supporters@greenpeace.org
 www.greenpeace.org

Greenpeace Russia • Novaya Bashilovka, 6. GSP-4, Moscow 127994, Russia • 7-095-257-4116
 Fax: 7-095-257-4110
 greenpeace.russia@diala.greenpeace.org
 www.greenpeace.ru



AUTOMAGIC BATTERY WATERING



WE MAKE WATER FROM YOUR GAS

Hydrogen and oxygen battery gas catalytically recombined into pure water and returned to each battery cell. Keeps battery topped off for extended periods of time and reduces maintenance costs. Explosive hydrogen gas is virtually eliminated from the battery area. Corrosive spray and fumes are contained and washed back into each battery cell. Electrolyte kept strong longer, extending the useful power and life of the battery. HYDROCAP Vents simply replace the battery's caps. Battery maintenance is greatly reduced. Write or call for more information.




Things that Work!



305-696-2504
 975 NW 95 St.
 Miami, FL 33150



The Dual Axis Tracking Advantage
**as compared to a fixed mount tilted at latitude*

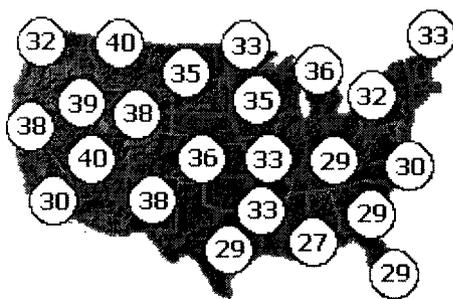

Percent Annual Power Increase

More Power...Less Money

ARRAY TECHNOLOGIES, INC. www.wattsun.com
 3312 STANFORD NE, ALBUQUERQUE, NM 87107
 TEL: (505) 881-7567 FAX: (505) 881-7572

ELECTRIC VEHICLE

COMPONENTS, CONVERSION KITS, PUBLICATIONS, VIDEOS, AND ENGINEERING DESIGN SERVICES FOR THE EV HOBBYIST AND MANUFACTURER...All components selected with safety and reliability foremost in mind...We stock and sell the largest variety of the very best:

- ◆ ADVANCED DC Motors in 12 variations from 2 HP to 28.5 HP
- ◆ CURTIS-PMC Controllers, Throttle Potboxes, Footpedals
- ◆ ALBRIGHT & KILOVAC Main & Reverse Contactors in 6 models
- ◆ GENERAL ELECTRIC & HEINEMANN Circuit Breakers
- ◆ BUSSMAN Safety Fuses from 200 to 800 amps
- ◆ DC-DC Converters from 48 to 336 V input
- ◆ K & W ENG. & BYCAN Battery Chargers from 48 to 144 V
- ◆ Full line of CURTIS, WESTBERG, & KTA Meters & Gauges
- ◆ DELTEC Meter Shunts from 50 to 1,000 A
- ◆ EVCC Adapter Plates, Couplings, Clamps, & Brackets
- ◆ PRESTOFLEX Welding Cable, MAGNA Lugs, Assy. Tools
- ◆ CONVERSION KITS for vehicles from 300 to 10,000 lbs.
- ◆ Complete ELECTRATHON Drive & Instrumentation Pkg.
- ◆ 4 Complete GO KART kits...for up to 90 mph..

KTA SERVICES INC.

COMPONENTS & PUBLICATIONS CATALOG.....\$5.00
 Electric Vehicle components and systems since 1984

944 West 21st Street – Upland, CA 91784 USA
 Tel: (909) 949-7914 – FAX: (909) 949-7916
 Web: www.kta-ev.com

ZAPSUCKER .COM



BZ Products Model MPPT 150-12

12 VOLT 150 WATT

MAXIMUM POWER POINT TRACKING CHARGE CONTROLLER

- Boost charge current up to 30%
- Up to 15 amps output current
- High efficiency 95%
- PWM control with temperature compensation
- Weather proof powder coated metal enclosure with 1/2" conduit knockouts
- Maximize your small system's performance
- Five year warranty
- Cost about the same as regular PWM charge controllers
- Industrial packaging available



BZ Products, Inc.

314-644-2490 • bzp@brick.net
7614 Marion Ct., St. Louis, MO 63143, USA

Phoenix Composting Toilet System

Odorless • Waterless • Large Capacity
Low Energy Requirements • Owner-Friendly

Advanced Composting Systems
195 Meadows RD
Whitefish, MT 59937
Voice: 406-862-3854
Fax: 406-862-3855
phoenix@compostingtoilet.com
www.compostingtoilet.com

Sunergy Systems, LTD
Box 70, Cremona AB T0M 0R0
Voice/fax: 403-637-3973
sunergy@telusplanet.net
In British Columbia:
Voice: 250-751-0053
Fax: 250-751-0063

RENEWABLE ENERGY SOLUTIONS!

WIND POWER

PHOTOVOLTAIC

MICROHYDRO



**HUMAN POWER
GENERATOR**


WINDSTREAM POWER SYSTEMS INC.

PO Box 1604 HP, Burlington, VT 05402 Tel 802 658 0075 Fax 802 658 1098

info@windstreampower.com • www.windstreampower.com

Independent Power Systems Throughout the World – Our 26th Year

Intentional Communities

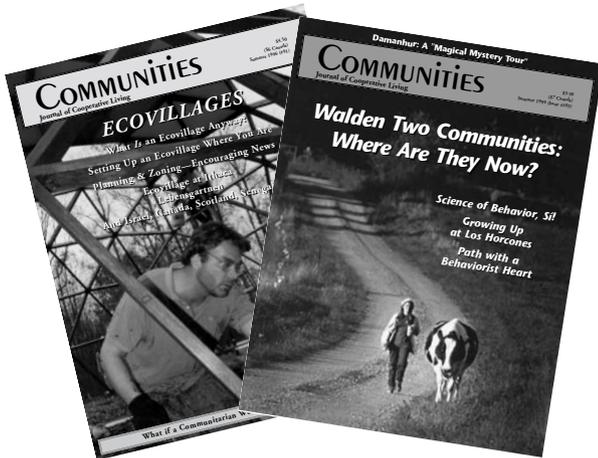

Dedicated to communicating the experience and wisdom of intentional community.

Each issue features a different theme such as Appropriate Technology, Decision Making, plus ongoing columns.

1 year subscription \$20 (\$24 Canada)

Sample issue \$6 (\$8)

800-462-8240 <http://fic.ic.org/cmaga>

Tour de Sol -


The Great American
Green Transportation
Festival

MAY 2002

NYC - DC

Festivals &

Road Rally Competition

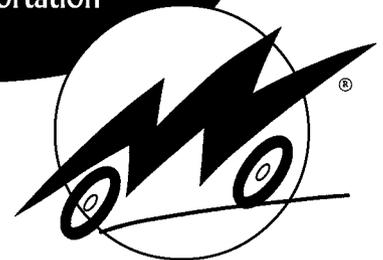

NORTHEAST SUSTAINABLE ENERGY ASSOCIATION

50 MILES STREET • GREENFIELD, MA 01301

(413) 774-6051 nesea@nesea.org www.nesea.org

Please send me more information on:

Entering

Attending

Volunteering

Exhibiting or Sponsoring

Name _____

Company name _____

Address _____

City, State, Zip _____

Phone _____

Fax _____

PROPANE POWER



Dynamx, Inc. warehouses the largest selection of propane refrigerators and freezers in the nation. From 2.2 to 17 Cu. Ft. Discounted Pricing.

Crystal Cold 13.5 Cu. Ft. AGA / CGA Approved.

Crystal Cold - Zero - Consul - Frostek - Danby - Conserve - Sanyo - ECO Fridge

Frostek 6 or 8.5 Cu. Ft. chest freezer. "Known as the worlds finest" AGA / CGA approved

Crystal Cold 12.5 Cu. Ft. Stand-up freezer also available.



Dynamx, Inc.
(928) 636-1955

www.warehouseappliance.com

Dealer inquiries welcome

Solar products since 1979

AAA Solar Supply Inc - (800) 245-0311
Photovoltaics - Solar Hot Water
Space Heating - Pool Heating
New, used & rebuilt for the do-it-yourselfer
www.aaasolar.com

Breakthrough Product from the makers of the STREAM ENGINE

The New LH1000!

- Operates at heads of 3 to 10 feet
- Adjustable for maximum power
- Multiple output voltages
- Output over 1KW
- Easy Installation




"This is a very cool machine. It represents a major breakthrough in microhydro design." -Bob-O Schultze on the Stream Engine, Home Power #67

Epoxy Encapsulated Alternator

Waterproof, Water Cooled, Neodymium Permanent Magnets, Brushless, Reconnectable Windings

Also Available:
Hydro components including turgo & pelton runners, system design and tech support.

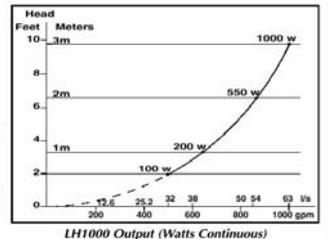

ENERGY SYSTEMS & DESIGN

P.O. Box 4557, Sussex, NB E4E 5L7 Canada
Tel.: (506) 433-3151 • Fax: (506) 433-6151
Website: www.microhydropower.com
Email: hydropow@nbnet.nb.ca

WE WROTE THE BOOK ON ELECTRIC CAR CONVERSIONS

CONVERT IT How-To Manual by Michael Brown with Shari Prange

Expanded & Updated 3rd Edition
\$30.00 tax & postage included

"We built Mr. Brown's car, and we won."

Bruce Burk, St. Johnsbury Academy,
1991 American Tour de Sol Open Class Winner.



ELECTRO AUTOMOTIVE
POB 1113-HP, FELTON, CA 95018



www.electroauto.com

QUICKCHARGER BATTERY CHARGER

The Best Charger Made Today




- Quickly Charges Up To 4 'AAA', 'AA', 'C' or 'D' Size NiCad Or NiMH Batteries
- The Only Charger To Fully Charge All Sizes Of New High Capacity NiMH And NiCad Batteries
- Intelligent Discharge Revitalizes NiCad Batteries
- Also Works On 12V DC

Call for FREE Catalog

C. CRANE COMPANY INC.

\$49⁹⁵
Shipping Incl.

800-522-8863 • C-CRANE.COM

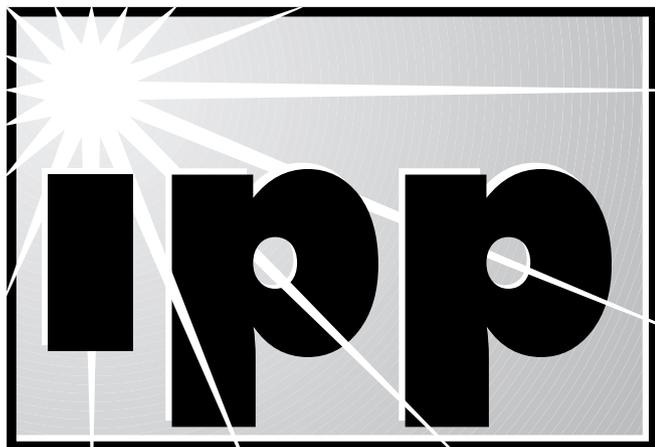

Don Loweburg

©2002 Don Loweburg

Economic Payback

In *HP85*, *IPP* examined how time-of-use (TOU) metering and net metering affected payback time. TOU can significantly reduce the payback time for a PV system if a household can manage its daytime loads.

Back in *HP65* ("Beyond Net Metering"), *IPP* envisioned the possibility of real time pricing and how that would improve the economics of PV. Real time pricing is still not a reality, but changes in California's utility rate structure have improved the economics of PV. TOU and net metering together certainly represent a step beyond net metering alone.

However, most California residential utility customers are not on TOU, but rather are charged according to a multilevel or tiered price schedule. The recent rate hike given to the utilities in California was achieved by significantly increasing the price of the tiers above baseline, while baseline rates remained unchanged. This strategy put the bite on heavy users of electricity.

It is not uncommon when reviewing these customers' electric bills to see third and fourth tier charges as high as US\$0.25 per KWH. Since the economic benefits of PV will accrue to the highest tiers first, the economic payback time for a PV system is reduced significantly for customers with high usage. For example, at US\$0.12 per KWH, simple payback would happen in about fifteen years. However, at US\$0.25 per KWH, the payback happens in about seven years.

These figures do depend on the 50 percent rebate available to Californians. What we can see here is that

as utility rates more accurately reflect the time value of energy, and send appropriate price signals based on the volume of energy consumed, opportunities for economic PV develop.

Lovins on California Electricity Restructuring

Amory Lovins' writings may be known to many *Home Power* readers. He is CEO of Research at Rocky Mountain Institute, author of many books on energy efficiency, credited with the concept "negawatts," and designer of the Hypercar. On July 11, 2001 he made the presentation, "Electricity Solutions for California," to the Commonwealth Club of San Francisco. Though commentary about electric restructuring has been generous in *Home Power*, these additional comments by Lovins are edifying and generally amplify points made in past columns.

Amory Lovins began with four statements about electricity restructuring that run counter to common opinion:

- California's electricity demand did not soar. Nor was there a huge increase in demand due to the Internet and the dot com boom.
- California did not stop building generating plants during the 1990s.
- Even during outages, California was not short of generating capacity.
- The current rush of generating plant construction may result in overproduction in the future.

Lovins provides extended dialog on each of these points. Interested readers can get a copy of the presentation by contacting IPP. Besides debunking the four myths cited above, his main conclusions are that market gaming and intentional reduction of plant output by generators created the emergencies, and that flaws in the restructuring legislation made certain that retail competition failed.

Dealer-Installer Certification Programs

Training for installers and dealers of PV systems has been offered by distributors and manufacturers for many years. There's been everything from one-day, topic-specific sessions to longer trainings involving home study and hands-on infield components. For many years, Solar Energy International (SEI) has also offered both short and long classes on a wide range of renewable energy topics.

The North American Board of Certified Energy Practitioners (NABCEP), currently applying for nonprofit status, is organizing and developing a national certification program. The board includes participants

from all areas of the PV industry. NABCEP will be incorporating successful elements from existing programs. The goal of the project is to create a national installers' certification standard and test.

The voluntary certification program is targeted to be in place by midsummer of 2002. A menu of work and training options has been developed as prerequisites to taking the certification test. To view the draft of the requirements, go to the NABCEP Web site.

System Output—Xantrex Publishes Study

In the last few columns, I've reviewed Sandia's work on module output and how to make reasonable predictions for system power and energy output. Based on some simple approximations, it was shown that a system's AC power output is about 70 percent of the solar-electric array's STC rating (the manufacturer's nameplate DC rating).

Xantrex, in response to customer concerns about systems producing less than expected, has recently released a white paper on this topic. Titled "Measuring Photovoltaic and Inverter Efficiency and Performance," the paper goes into great detail explaining the instrumentation and methodology of measuring system output.

Other system issues, such as a module's maximum power point (MPPT) variation with temperature and installation site details, are also covered. The conclusions are very close to those of the casual approach used in past columns, but the rigor and detail may be of interest to some. The paper is available on Xantrex's Web site.

Caspian Sea Oil

The popular view of the war in Afghanistan holds that it is about terrorism and the September attacks on New York and the Pentagon. On the surface, this seems like a reasonable conclusion. But looking deeper, I suggest that it's about oil.

Several years ago (*IPP*, *HP69*), I mentioned the oil fields being developed in and around the Caspian Sea basin. My information came from a series of articles by Frank Viviano written for the *San Francisco Chronicle*. Titled, "New El Dorado," the series began in the August 11, 1998 issue. According to Viviano, the Caspian Sea area holds oil and gas reserves equal to the Persian Gulf.

The author detailed the extreme political instability of the region, and the difficulty of locating the pipelines needed to get the oil to western markets. Certainly the political stability of the region has not improved since that time!

My analysis is that the growing fundamentalist Taliban control of that region was totally unacceptable to the oil cartels and their governments. September 11 aside, it was only a matter of time before the need for western control of this oil rich area would lead to military action. The destruction of the towers provided the green light. Our addiction to imported oil comes at a high price.

Renewable Lab

Drake Chamberlin, wrench and IPP member, is heading up the formation of a Renewable Energy Test Lab. The purpose of the lab is to provide independent testing of both equipment and practices related to the safe installation of renewable energy systems. The lab is envisioned as complementary to existing code writing agencies and other testing labs.

A significant focus of the project is to develop and support techniques that are safe but don't increase the cost of code compliant systems. The lab will be set up as a nonprofit organization affiliated with and sharing IPP's nonprofit charter. Chris Sinton of Alfred University is seeking funding for the lab. Those interested in more information, wanting to provide input, or wishing to support the project with tax deductible donations, can contact Drake.

Net Metering, Again!

Last issue, we reviewed Carl Weinberg's article "Keeping the Lights On." He used the terms "hesitate and hassle" and "snarling dog" to describe utility behavior towards distributed generation. Those terms very well describe the current behavior of PG&E (Carl's one-time employer) regarding the implementation of California's new one megawatt net metering law.

Richard Perez's editorial in *HP85* described the case of Kenneth Adelman. Mr. Adelman recently completed a 31 KW PV system for his home. Being under 1 MW, he planned to be net metered. However, when he applied for net metering, he was told that he would have to pay US\$7,000 for an interconnection study and US\$600,000 for distribution system upgrades.

Since California's net metering law explicitly prohibits any additional charges being levied on net metering customers, he declined to pay. He was subsequently disconnected from service. After a long battle, he is now allowed to sell back up to 20 KW from his system. The battle with PG&E is continuing, and you can read about it on Ken Adelman's Web site.

PG&E is breaking the law. Section 2827 (d) of the net metering law says, "Any new or additional demand charge, standby charge, customer charge, minimum monthly charge, interconnection charge, or other

charge that would increase an eligible customer-generator's costs beyond those of other customers in the rate class to which the eligible customer-generator would otherwise be assigned are contrary to the intent of this legislation, and shall not form a part of the new energy metering contracts or tariffs."

This is pretty clear language. In his editorial, Richard used this situation as a rationale for a federal net metering law. I support this goal. But in this case, we have a law that is clear. What we need is enforcement.

On October 30, 2001, the California Solar Energy Industries Association (CAL SEIA) filed a protest with the California Public Utilities Commission (PUC). Included in that filing is a letter from the author of California's net metering law, assemblyman Fred Keeley, stating clearly his legislative intention that net-metered systems be free of any additional charges. The Office of Ratepayers Advocates has also filed a protest echoing CAL SEIA's comments.

I hope that this level of strong support for Mr. Adelman, and PG&E's blatant violation of the law will persuade the commission to make the right decision. This situation stands as one more example of the fact that utilities are enemies of PV and distributed generation. At the legislative level, the PV industry must spend big money to get legislation allowing PV interconnection. Subsequently the industry must then spend additional efforts and money getting those laws enforced.

The utilities create barriers to PV and distributed generation at every possible opportunity. Carl Weinberg's imagery of the utility as a "snarling dog" (*IPP, HP86*) is right on the mark. California readers should keep in mind that AB29X, the latest net metering law approved this year, will need to be re-legislated next year due to the one year sunset provision attached at the last minute.

Renewable Energy in San Francisco

There's some very exciting news from San Francisco. On November 6, 2001, voters approved a US\$100 million renewable energy bond. It provides for the purchase of from 10 to 12 MW of PV and an additional 30 MW of wind. The systems are to be installed on city property and buildings. The bond measure passed with a 73 to 27 percent margin. San Francisco joins Sacramento and Los Angeles as "solar committed" cities.

San Franciscans also voted on another measure on the ballot that would have allowed the city to form a municipal power authority. The municipal power measure lost by a few percent. On the eve of the election, PG&E's parent company announced a 234

percent increase in profit for the year. The two million dollars spent opposing municipalization is pocket change compared to their profits.

Meanwhile, the regulated PG&E cries poor (following a massive transfer of wealth to the unregulated parent corporation last December), and has filed for bankruptcy! After the citizens of Sacramento decided to dump PG&E in favor of forming their own municipal utility, it took another 23 years plowing through the courts to make it happen. These corporate thugs do not let go easily!

California Solar Tax Credit

California taxpayers can now receive a 15 percent state tax credit. Voted into law in October 2001, SBX2 17 is retroactive to January 1, 2001. The credit applies to the net cost of a system. For example, a US\$20,000 system after receiving a California rebate would cost the customer US\$10,000. That US\$10,000 can be reduced another US\$1,500 by taking the tax credit, if you are in a high enough tax bracket.

Other California solar legislation recently passed is SBX2 82 (Solar on State Buildings) and ABX2 48 (Solar Training and Certification). The complete bills and their legislative histories are available at www.leginfo.ca.gov/index.html.

Online Information

Tor Allen is moderator and facilitator for the California PV Alliance (PVA). The alliance is an ad hoc working group with members from all elements of the PV industry. The group meets four times a year, alternating between southern and northern California sites.

Tor maintains a Web site, with a section for PVA. The site has up-to-date information about the California solar scene. You can also register for two newsgroups, Solar e-Clips and CalPVAlliance. Tor's site is very well laid out and easy to navigate, in addition to having a wealth of information. This site is valuable to all interested in PV, not just Californians.

Access

Don Loweberg, Independent Power Providers (IPP), PO Box 231, North Fork, CA 93643 • 559-877-7080
Fax: 559-877-2980 • don.loweberg@homepower.com
www.i2p.org

Rocky Mountain Institute (RMI), 1739 Snowmass Creek Rd., Snowmass, CO 81654 • 800-289-9398 or 970-927-3851 • Fax: 970-927-3420 • outreach@rmi.org
www.rmi.org

Solar Energy International (SEI), PO Box 715, Carbondale, CO 81623 • 970-963-8855

Fax: 970-963-8866 • sei@solarenergy.org
www.solarenergy.org

The North American Board of Certified Energy Practitioners (NABCEP), PO Box 260095, Highlands Ranch, CO 80163 • Phone/Fax: 720-344-0341
wparker@ispq.org • www.nabcep.org

Xantrex Technology, Inc., Distributed Residential and Commercial Markets, 5916 195th St. NE, Arlington, WA 98223 • 360-435-8826 • Fax: 360-435-2229
inverters@traceengineering.com • www.xantrex.com

Renewable Energy Lab, Drake Chamberlin, 3138 Lyle Ct., Denver, CO 80211 • Phone/Fax: 303-477-4739
solar@eagle-access.net • http://eagle-access.net/solar

Kenneth Adelman, 1365 Meadowridge Rd., Corralitos, CA 95076 • adelman@adelman.com
www.solarwarrior.com

California Solar Energy Industries Association (CAL SEIA), PO Box 782, Rio Vista, CA 94571
800-225-7799 or 949-837-7430 • Fax: 949-586-2357
lanelson@worldnet.att.net • www.calseia.org

California Public Utilities Commission (CPUC), 505 Van Ness Ave., San Francisco, CA 94102 • 800-649-7570 or 415-703-2782 • Fax: 415-703-1758
consumer-affairs@cpuc.ca.gov • www.cpuc.ca.gov

California PV Alliance (PVA), Tor Allen, c/o The Rahu Institute, 1535 Center Ave., Martinez, CA 94553
925-370-7262 • Fax: 815-461-1465 • tor@rahus.org
www.californiasolarcenter.org/calpvalliance.html



Efficient hot water starts with the sun. And ends with Bosch.



The Bosch AquaStar tankless gas water heater, model 125BS, is designed to work with preheated water from solar systems. The tankless construction provides an endless flow of hot water but heats water only when you need it – meaning you save energy. And since it's manufactured by Bosch, it's nearly as dependable as the sun itself!



AHPW0202



CONTROLLED ENERGY CORPORATION
800-642-3199
www.ControlledEnergy.com/hp

Earn a degree in Renewable Energy

with a concentration in Photovoltaic Design and Installation in two years or less at



San Juan College, Farmington, NM

- ◆ Prepare for a career with job opportunities in renewable energy businesses, equipment supply companies, remote power field service, utilities or international agencies.
- ◆ Learn about solar electric (photovoltaic), solar thermal, wind, micro hydro, and hydrogen energy conversion.
- ◆ Earn a 2 year AAS degree or 1 year certificate. Both emphasize full NEC compliance.
- ◆ Combine science with hands-on learning.

San Juan College . . .

- ◆ Is a progressive community college located in the Four Corners.
- ◆ Tuition \$360/semester maximum out-of-state and \$180 in-state. Housing assistance available.

Information:

Carl Bickford, (505) 566-3503 or (800) 241-6327
bickford@sjc.cc.nm.us
website: www.sjc.cc.nm.us/reng/index.html



www.hydrogenappliances.com
We sell PMA's and water turbines



Bio Diesel supplies / Mini refineries
HORNET Wind Turbines
Best dollar per Watt value on the market today! *Technical questions call 661-724-1919*
Order line call 800-229-7652

PC Software for **TECE** Sine Inverters

WinVerter™ Setup for installers


- Save time programming
- Record setup of multiple customers
- Easy reprogramming

WinVerter™ Monitor for users

- See status at a glance
- Control inverter from local PC & via remote modem
- Log meter data to file

We also sell SW communications & memory adapters
www.RightHandEng.com / (425) 844-1291

2002 NEC & Beyond



John Wiles

Sponsored by the Photovoltaic Systems Assistance Center,
Sandia National Laboratories

The 2002 *National Electrical Code (NEC)* has been published by the National Fire Protection Association (NFPA), and will be enacted into law by many states and local jurisdictions after January 1, 2002. My column in *HP86* covered changes to the *NEC*, sections 690.2 through 690.14. This column will cover changes in the remainder of Article 690, and discuss the start of the 2005 *NEC* activities.

About 40 people in the PV industry worked on a set of 32 proposed changes to the 2002 *NEC*. Others inside and outside the industry had input, as can anyone who will take the time to properly fill out the required form.

Many of these proposals were not well substantiated, and were rejected on the first cycle of the three-year process. Several changes were made during the public comment phase. The Code Making Panel (CMP-3) had their say, and then the NFPA correlating committee made the final revisions and edits.

The exact contents of Article 690 for the 2002 *NEC* will not be repeated here due to space restrictions. Everyone designing and installing PV systems is encouraged to get a copy of the complete 2002 *NEC*, and better yet, the 2002 *NEC Handbook*.

690.45 Size of the Equipment Grounding Conductor

This section was added to reflect recent research that shows that the equipment-grounding conductors for module source and output circuits must essentially be as large as the circuit conductors (at least they must have an ampacity of 1.25 times the short-circuit current). Oversizing the equipment-grounding conductors when the circuit conductors are oversized for voltage drop is still required, but they don't have to be any larger than the circuit conductors.

If the system is protected by a Section 690.5 ground-fault detection device, the equipment-grounding conductors are to be sized according to Section

250.122. This sizes the equipment-grounding conductors based on the overcurrent device protecting that circuit.

690.47 Grounding Electrode System

CMP-3 revised this section into two parts. Section A addresses alternating current grounding and Section B addresses DC grounding. All the section really does is refer back to the appropriate AC or DC grounding sections in Article 250.

690.55 Photovoltaic Power Systems Employing Energy Storage

This new section requires a label that will show the maximum operating voltage (including any equalizing voltage) of the system, and the polarity of the grounded conductor. Although most PV systems use a negative ground, some telecommunications systems use positive grounds. The label should be placed near the main system disconnects.

690.56 Identification of Power Sources

Part A deals with the marking required on the outside of buildings with stand-alone PV systems. Part B covers the exterior markings on buildings that have utility service and PV systems. In both cases, the requirement is to indicate the locations of the main disconnects for all sources of electrical energy to a building—including renewable, utility, or backup generator sources.

690.71 (D) Battery Nonconductive Cases and Racks

This section requires that flooded, lead-acid battery systems operating at over 48 volts nominal (twenty-four, 2 volt cells) have nonconductive racks and cases to minimize the potential for leakage currents, carbon tracks, shocks, and explosions. These problems have been seen on batteries in high-voltage battery banks (100–500 volts). This requirement does not apply to valve-regulated, lead-acid batteries (VRLA) that are sealed, because they normally don't pose similar hazards.

690.71 (E) Disconnection of Series Battery Circuits

This section requires that battery banks operating at more than 48 volts nominal have provisions to disconnect the series-connected cells into sets of 24 cells or fewer for servicing. Bolted or plug-in disconnects are allowed, and the plug-in disconnects do not have to be load-break rated. (A switch that can carry the circuit current, but that is not rated to open the circuit while carrying current is known as a non-load-break rated switch.)

690.71 (F) Battery Maintenance Disconnecting Means

A disconnect (for use by qualified people only) is now required to open the grounded conductor of battery banks operating above 48 volts nominal. This

disconnect may be a non-load-break switch, and it may not unground the rest of the PV system.

690.71 (G) Battery Systems of More Than 48 Volts

Battery systems of more than 48 volts nominal may be (permissive language, not required) operated with ungrounded conductors if several conditions are met. The PV array must be grounded. Any AC and DC load circuits must be grounded. The first two conditions are probably going to be met by certain types of inverters that provide internal ground-circuit isolation between the PV array, the load circuits, and the battery system.

All ungrounded input/output battery circuit conductors will be required to have switched disconnects and overcurrent protection. A ground-fault detector will be required to monitor the battery bank for ground faults.

690.72 (B) Diversion Charge Control

Subparagraph (1) requires that any system using a diversion charge controller have a second independent method of charge control. With diversion controllers, if the diversion circuit fails, the batteries may be overcharged, and can pose hazards (explosions, smoke, and fire). This requirement would apply to both AC and DC diversion controllers.

The code is not specific in the type of independent charge control required. It might be a second diversion controller or a series-type controller set at a slightly higher voltage. One way, when using an inverter with an extra adjustable relay measuring battery voltage, is to have the inverter drive an external relay to open the PV circuit if the diversion controller fails. Xantrex Technologies recommends this method when selling excess energy from the PV array back to the grid as a means of protecting the batteries from overcharge if the grid should fail.

Subparagraph (2) says that the current rating of the DC diversion load, the ampacity of the diversion load circuits, and the rating of the overcurrent device protecting those circuits must be at least 150 percent of the current rating of the charge controller. Of course, the diversion charge controller should be sized to handle the total output of the renewable source.

Clearer Code?

Most of the changes in Article 690 of the 2002 *NEC* make it somewhat clearer. The revisions to the comments in the 2002 *NEC Handbook* should also make it easier to understand the rationale behind the code requirements. Now is the time to start deliberations on the 2005 *NEC*, to improve it as well.

The 2005 National Electrical Code

Now that the 2002 *NEC* has been published, work is starting on the 2005 *NEC*. Remember that anyone can

submit well-substantiated proposals to the National Fire Protection Association for consideration by the code-making panels.

Since NFPA, Underwriters Laboratories (UL), the Institute of Electrical and Electronic Engineers (IEEE), the International Association of Electrical Inspectors (IAEI), and other organizations have members on the code-making panels, the substantiation for proposals should address any requirements and concerns that those organizations might have, such as compliance with other electrical industry requirements. For example, a proposal suggesting that cables not listed by a recognized testing lab be used in PV systems would not receive much support by the panel members unless it had very good substantiation.

If you are interested in participating in the e-mail discussions of the 2005 code, or attending the meetings, just e-mail me and I will put you on our list for future information. The proposals that we at the Sandia National Laboratories make are well substantiated, and are coordinated with UL and IEEE members before submission.

2005 NEC Proposals

Here are a few items that are being discussed and may be proposed for inclusion in the *NEC* or in the appropriate UL standard.

- Some stand-alone inverters may have DC input currents that have RMS (root mean square) AC ripple currents that exceed the average DC currents. Should this RMS value be marked on the inverter, and then used for cable ampacity and overcurrent device ratings?
- Should the grounding point for framed PV modules be placed inside the module junction box to facilitate the equipment-grounding conductor connection? This would minimize the copper-to-aluminum compatibility problem, and keep all the conductors together to minimize the circuit time constant by reducing the circuit inductance.
- Should all PV modules be marked for use with 90°C (194°F) conductors, since very few locations would allow the use of 75°C (167°F) conductors because junction box temperatures usually exceed 70°C (158°F)?
- Should the warning required by *NEC* Section 690.5 (C) be made part of the UL-required marking on the inverter? The warning states that a ground-fault indication may mean that the normally grounded circuit conductors are no longer grounded and may be energized.

- Should inverters that ground the PV array inside the inverter be required to have an external warning stating the grounding method? Should they be required to have terminals large enough to meet code-required, grounding-electrode conductors?
- Should the *NEC* adopt language similar to the European and Japanese standards for ungrounded PV systems up to 120 volts?
- What will the most advanced plug-n-play PV system look like, and what are the safety issues that need to be addressed in the *NEC*?

Questions or comments? If you have questions about the *NEC*, or the implementation of PV systems that follow the requirements of the *NEC*, feel free to call, fax, e-mail, or write me. Sandia National Laboratories sponsors my activities in this area as a support function to the PV industry. This work was supported by the United States Department of Energy under Contract DE-FC04-00AL66794. Sandia is a multiprogram laboratory operated by Sandia Corporation, a Lockheed Martin Company, for the United States Department of Energy.

Access

John C. Wiles • Southwest Technology Development Institute, New Mexico State University, Box 30,001, MSC 3 SOLAR, Las Cruces, NM 88003 • 505-646-6105
 Fax: 505-646-3841 • jwiles@nmsu.edu
www.nmsu.edu/~tdi/pv.htm


Sponsor: Sandia National Laboratories, Ward Bower, Department 6218, MS 0753, Albuquerque, NM 87185
 505-844-5206 • Fax: 505-844-6541
wibower@sandia.gov • www.sandia.gov/pv

The 2002 *NEC* and the *NEC Handbook* are available from the National Fire Protection Association (NFPA), 11 Tracy Drive, Avon, MA 02322 • 800 344-3555 or 508-895-8300 • Fax: 800-593-6372 or 508-895-8301
custserv@nfpa.org • www.nfpa.org



CHEAPESTSOLAR
.COM

**Heat your water... Heat your home...
 With Renewable Energy**



**Solar-Thermal
 Water Heating**

- Heat-Pipe Technology
- Easy Installation
- Maintenance - Free
- Longer Life
- Better Efficiency



**Tile and Masonry
 Woodstoves**


- Modern, Contemporary Design
- European Craftsmanship
- Super - High Efficiency
- Unlimited Styles, Colors, and Textures

For more information and to see our full line of renewable energy products, visit us at

www.sssolar.com



Sun Spot Solar & Heating, Inc.
 P.O. Box 55
 Delaware Water Gap, PA 18327
 Phone: (570) 424-2473
 Fax: (570) 476-5353
 Email: sssolar@mail.ptd.net

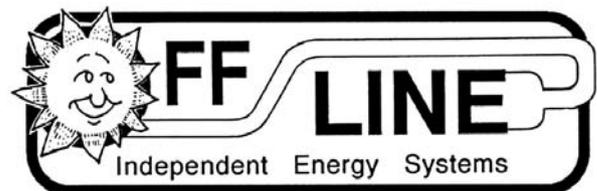

CA Lic. #661052

Our 17th Year Offgrid!

**We provide excellent service
 and technical support.**

**Residential Power • Water Systems • Communications
 Wind • PV • Hydro • Custom Design • Installation • Mail Order**

All Major Brands

SIEMENS



SunFrost



California Rebates!



(559) 877-7080

e-mail: ofln@aol.com

<http://www.psnw.com/~ofln>

located in the central Sierra, near Yosemite



OFFLINE
 P.O. Box 231
 North Fork, CA
 93643



Want more power & life from your batteries?

Then get the IES DeSulfator®
battery conditioner.


Call your dealer or visit
www.InnovativeEnergy.com

Not only the original, but the most powerful

DS-500 up to 350 amp hours
DS-1000 up to 1,000 amp hours

INNOVATIVE ENERGY SYSTEMS, INC.

9351-J Philadelphia Rd., P.O. Box 70060, Balto., MD 21237
410-686-3120 FAX: 410-686-4271

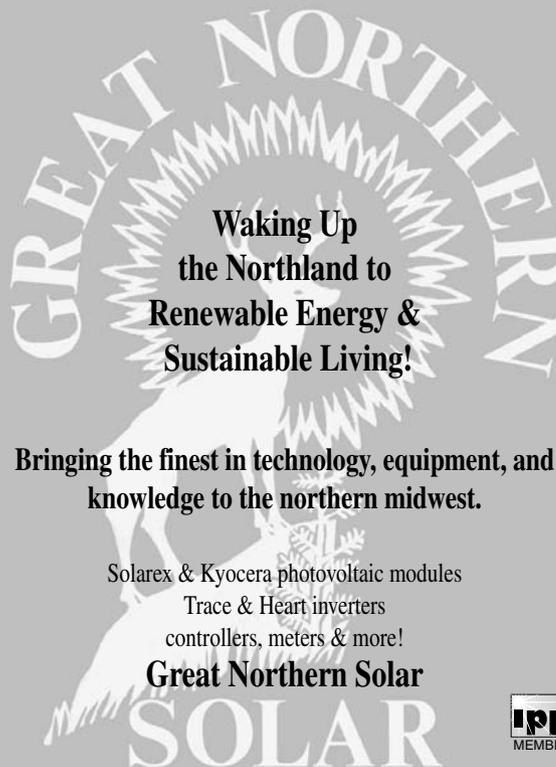

Waking Up
the Northland to
Renewable Energy &
Sustainable Living!

Bringing the finest in technology, equipment, and
knowledge to the northern midwest.

Solarex & Kyocera photovoltaic modules
Trace & Heart inverters
controllers, meters & more!

Great Northern Solar

SOLAR



77450 Evergreen Road, Suite #1, Port Wing, WI 54865
(715) 774-3374 • gosolar@win.bright.net

EPOWER® Charger / Booster

Prices
start at
\$599.95



- 12V-50, 100, 200 Amp
- 24V-25, 50, 100 Amp
- 38-64 lbs.
- Overload Protection
- Regulated Output
- Safety On/Off Switch
- Extended run LP option available—some models
- OHV engine option available—some models
- We also make a high quality OHV, all copper winding, brushless, 3KW AC generator, 120V or 120/240V

EPOWER
1346 W- 400S, Albion, IN 46701
Phone 219-636-2099
www.epowerchargerboosters.com

AC/DC Inverters, Solar Electric Modules

1-888-SOLARNOW
Toll Free

HORIZON INDUSTRIES

We Sell The Best & Service The Rest

Send \$4.00 for a catalog

2120 W Mission Rd (# L), Escondido, CA 92029
(760) 480-0403
www.horizonsolar.com

DC/Propane Refrig, Track Rack

Batteries, Charge Controllers

Water Pumps, DC Lights, DC Appliances

SOLAR COOLING

WITH

SOLAR CHILL

ULTRA LOW ENERGY – 25 TO 80 WATTS!

*The most efficient coolers on the planet.
12 & 24 Volt DC Evaporative Coolers
For Your Home or Vehicle (KAR KOOL)*

Call SOUTHWEST SOLAR
(520) 885-7925 Tuscon, Arizona, USA
southwest-solar.com

Meridian
energy systems, inc.




Solar-electric system
design, installation,
and service.

Austin, Texas
512-477-3050

www.meridiansolar.com

Home & Heart

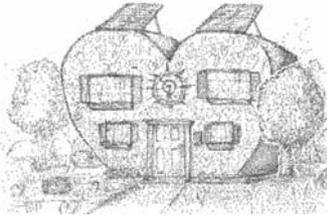

Kathleen Jarschke-Schultze

©2002 Kathleen Jarschke-Schultze

In the winter, we heat our home with wood. I have been doing this for the last sixteen years, Bob-O for much longer.

As with all mountain-living necessities, there is a learning curve. You have to learn how to start a fire, keep it going, bank it for the night, and clean your woodstove. Then there is cutting the wood, as well as splitting, stacking, and drying it.

Light My Fire

Ever since Prometheus brought fire to man, many people around the world and throughout history have used wood fires for heating and cooking. While some areas of the world have been denuded of trees for cooking fires, many well-forested areas use this renewable resource. There are increasingly efficient ways to burn wood for heating. In some parts of the country, this is the preferred and accepted way to heat homes, as it is in our area.

When I first moved to the mountains, I knew how to light a campfire. My family did a lot of camping when I was a kid, and my father taught us all how to start and maintain campfires. When I was very young, we lived in a house with a potbellied stove. Because I was so young, I was not allowed to touch the stove when a fire was in it. Then I met Bob-O, and using a wood heating stove became a way of life.

Be Kind to Kindling

In order to start a fire in a woodstove, you need dry kindling. You need a goodly amount. Knowing just how much to use with your particular stove comes with experience. It does no good to skimp on kindling. We prefer Douglas-fir, because it splits so nicely. If the wood is pitchy, all the better.

The very best kindling wood is from the stump of a standing snag that has died naturally. When this happens, all the sap drains back down the tree. The rounds taken from the bottom two to three feet of the stump are prime fatwood, wood completely saturated in

pitch. It only takes a few pieces of fatwood to get a fire going. Juniper and pine will make fine kindling. The caveat here is that the wood must be dry. Of course, this is just what's available in this part of the world.

By the way, the swell method of splitting kindling with a hatchet is also the safe way. You take a piece of wood, set the blade of the hatchet on the up-ended top. Hold the wood with one hand and the hatchet with the other. Lift the two together and drop sharply to the chopping block, just enough to plant the hatchet blade about an inch into the top of the wood.

Remove your hand from the wood, lift the hatchet with the wood attached, and drive it down onto the stump, splitting the wood. When you split the wood, you have *one* hand on the hatchet handle, and *none* on the piece of wood.

Making a Wood Stew

The art of burning wood for heat depends on having dry wood. Wood that is too wet yields little heat but lots of creosote. If it's too dry, it will burn too fast.

To start a fire, take four or five pieces of newspaper, wadded loosely. [Editor's Note: Newspaper printed with colored inks should not be used to start stoves equipped with catalytic converters. The metals present in the ink contaminate the catalyst and will result in premature failure.] Place the newspaper on the floor of the firebox. Take your kindling and lay a few pieces on top of the paper at an angle. Place a few more pieces on top of that at the opposite angle, forming an open cross hatch pattern. On top of this, gently lay a couple of slightly larger pieces of kindling parallel to the firebox walls.

Light the paper in several places across the front. Open the damper if you have one. If you don't, instead of completely shutting the stove door, leave it cracked open a little for a few minutes. Never walk away from your woodstove when the door is open.

You should be rewarded with the roar of the paper torching off. When that sound dies down, your kindling should be burning. When the kindling has truly caught fire, start adding larger pieces of wood to the fire. These must be graduated in size.

It would not do to add a big thick split of wood too early. The fire would go out, and you would have to remove all the wood in the stove and start again. This can be very messy, and if a few pieces are just smoldering but not burning, it can be quite smoky. This is experience talking here.

Sometimes your fire will burn down through lack of attention, and you have to revive it. Use the coals as your starter, and place small kindling on top. As that

wood kindles, add the progressively larger wood. If you have pieces of dry bark, it is good to use them for this. They will burn hot and fast, and really kickstart an almost dead fire.

My dad taught me a trick for when you have a smoldering fire that won't flame. He went to a secondhand store and picked up a cheap blow dryer. He disconnected the heater element. The hair dryer was now an electric bellows. It directed a stream of air to right where he wanted it (the area of wood that was smoldering), and got it flaming fast. After I saw his, I got one, and it really works great. It can be kind of messy till you get the hang of not blowing the ashes out of your stove at the same time.

Woodsheds

At our last house, on the Salmon River, we had an ace woodshed. Bob-O and his friend Cedar built it. It was a pole woodshed, 12 feet tall, about 14 feet wide, and 8 feet deep. It had two bays. One bay was for stacked firewood, and the other for stacked kindling rounds, ready to split.

There was enough room on the kindling side for all the wood tools, axes, mauls, hatchets, etc. We always kept back a nice big flat round to be the chopping block. This is what you set the wood on to position it for a good swing of the axe. It also keeps your axe and maul edges sharper longer if you don't hit the ground with them.

Since we moved here to the creek, we have had no woodshed. Every year we set out wood pallets, drive metal fence posts into the ground along the sides, and stack the firewood in between. After curing (drying) the wood during the summer, we cover the stack with a heavy tarp held down with pieces of firewood as weights.

This method has worked, but I have never liked it. I am the person who keeps the home fire burning and fills the wood rack next to the stove from the outdoor ricks. Too many times, in the dead of winter, I have found myself having to balance on ice-covered pallet slats, ducking under the tarp, trying to avoid or escape dumps of icy water or snow sliding off the tarp while I grab an armload of firewood. I'd venture to say that you have not felt real pain until you have clapped your nipple between two pieces of split madrone wood, or dropped one on the instep of your cold foot. The chopping block was out in the elements, without any cover from the harsher weather.

Slow Shedding

This year I told Bob-O that I really wanted a woodshed. Time went by, and we did not have the time to build anything. I suggested one of those metal roofed carports. We looked into it, but the cost was prohibitive.

Time grew short, and we needed to get our firewood in. We were at a local membership shopping warehouse when I saw that they had steel-framed canopies.

These canopies are 10 by 20 feet, with two long sides and one short side, covered by heavy duty, fitted tarps. The peaked roofs were also fitted, and hung over the sides by a foot. The cost was US\$149. I convinced Bob-O that it would work. The tarp material is supposed to last three years. By that time, we will be able to put some metal roofing on it.

I assembled it, with Bob-O helping to lift it onto the side posts. We cut foot-long pieces of 6 by 6 inch, pressure treated wood. We then drilled two holes in each of the eight pieces. After anchoring the side posts to the pieces of 6 by 6 with large wood screws, Bob-O hammered lengths of rebar through both holes in each 6 by 6 to anchor the whole assembly to the ground.

I called the company who made the canopy and ordered another short end section of tarp for US\$25. By enclosing both short ends, one full long side, and two-thirds of the long side facing the house, I have a completely viable woodshed.

The tarps are attached to the steel frame with tarp bungees. Those are funny looking bungee loops with a round knob on the end. I got extras, and double bungeed the corners and put extra bungees on the sides. We drove metal fence posts into the ground on the inside along the short ends of the shed, and threaded wooden pallets onto them to hold the rows of firewood in place.

With four cords of wood—cut, split, and stacked—there is still room for me to walk a wheelbarrow alongside the rick and pick and choose the pieces I want. I use a mixture of sizes for during the day, and some big solid honkers for banking in at night. It reminds me of shopping down the aisle of the market with my basket. When I am washing dishes and I look out my kitchen window, I can see my full woodshed. I think to myself, "That is a thing of beauty."

Of course there are the winds and snows of winter to be anticipated. I have high hopes for the durability of my woodshed. Come Spring, I'll let you know how it has fared the frozen north.

Truck & Stack

For the last few years, we have been buying our wood already cut and split. We take our flatbed trailer behind Bob-O's pickup, and drive about 50 miles to a small but professionally run woodlot. The owner has a self-loading log truck. He gets the otherwise discarded and unused hardwoods from logging operations. Most of it is madrone. Madrone is a hardwood native to the

Northwest. It is solid and heavy when first cut, and splits well when green. It dries fast and burns hot and long with little ash.

The wood is stacked one cord to a row at the woodlot. By stacking it carefully in the truck and trailer, we can get two cords in a single load. Back at home, we stack the wood as we take it out of the pickup. The trailer can't get close to the woodshed, so we unload the wood into the pickup, and drive up to the shed and stack it from there.

Fire & Ice

There is a saying that firewood warms you twice—once when you cut, split, and stack it, and once when you burn it. The problem is that the weather is not cold when you get the wood. This year it happened to be hot—in the 90s or 100s—when we did our wood work. Heaving and stacking the wood, we were downright sweaty more than twice.

But when winter rolls in, there is nothing so wonderful as a good warm woodstove when it is snowing outside. A really special treat is to eat ice cream while sitting in the heat emanating from a woodstove or fireplace. People who live in the Tropics will never know this joy. Marge George, the proprietress of the old Forks of Salmon general store, once told Bob-O that she sold more ice cream in the winter than she ever did in the summer. Oh, those wood burners, they are very wise.

Access

Kathleen Jarschke-Schultze is still working on that darn chicken palace at her home in Northernmost California, c/o *Home Power* magazine, PO Box 520, Ashland, OR 97520 • kathleen.jarschke-schultze@homepower.com



NEW FRONTIER SOLAR & SATELLITE

PHOTOVOLTAICS • WIND POWER • MICRO HYDRO
PASSIVE SOLAR • HOT WATER • REFRIGERATORS
COMPOSTING PRIVIES • ELECTRIC VEHICLES
TITLE 24 CALCS. • POWER SUPPLIES
SATELLITE PHONES • SATELLITE INTERNET
SATELLITE T.V. • SATELLITE MUSIC
RADIO PHONES

*18 years experience in design, sales, installation, repair,
and maintenance.*

Todd G. King, M.A., Proprietor
106 East St., Alturas, CA 96101
(530) 233-5219
newfrontier@starband.net

Get A Job!

Home Power is proud to offer a new feature on our Web site called "Get a Job!"

Home Power encourages businesses to post their renewable energy related jobs on our Web site at no charge.

If you want to work in the RE industry, you can search the listings for your dream job.

Make your work part of the solution!

www.homepower.com

ELECTRIC CAR COMPONENTS & KITS

- *Reliable, Affordable Components
- *Large Library Of Adaptors
- *Most Experienced Tech Support
- *Design Assistance

Conversion Kits:

*Basic & Deluxe Universal Kits

Contain all drive system components. You add mounts, boxes, etc. to fit your model.

*Complete Custom Bolt-In Kits

Voltsrabbit for VW Rabbit, and *Voltsporsche* for Porsche 914. Completely prefabbed. No design or welding necessary. Kits include everything except donor car & batteries.

For Catalog, Send \$6.00 To:

ELECTRO AUTOMOTIVE
POB 1113-HP
FELTON, CA 95018



(Outside the U.S. & Canada, add \$5.00)

www.electroauto.com

ZAPSUCKER .COM



LOWEST PRICES UNDER THE SUN!



Solar Electric Inc.

5555 Santa Fe St. #D, San Diego, CA 92109-1602 USA
858-581-0051, 858-581-6440 fax, 1-877-842-5678 TOLL FREE FAX
www.solarelectricinc.com, email: solar@cts.com

1-800-842-5678

Best Selection! Lowest Prices! Guaranteed!




UNI-SOLAR



www.baysolarpowerdesign.com

"Be a Part of the Energy Solution"
Will beat pricing on Sunny Boy SMA,
ASE and Trace products.

(650) 738-8355



Make every day special


The natural ingredients of our products
get their energy from the sun



simmonsnaturals.com

Off the grid since
1980

42295 Hwy. 36, Bridgeville, Ca 95526

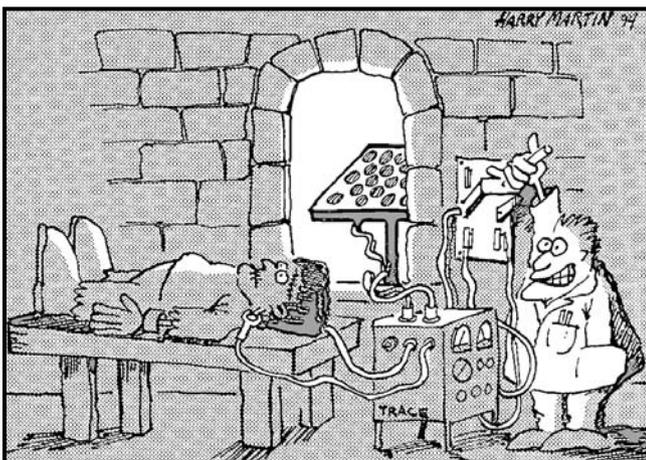

Need a renewable energy quick-start for the ole' brain?

Home Power Quick-Start Subscription Special

our last six available issues, plus a one year surface
subscription...all for \$45 inside USA (International extra)

(Shipping \$5 in US and Canada, \$7 International)

Home Power Magazine

P.O. Box 520, Ashland OR 97520 USA

800-707-6585 in USA, or 541-512-0201

VISA or MC

Adopt a Library!

When Karen and I were living with kerosene lamps, we went to our local public library to find out if there was a better way to light up our nights. We found nothing about small scale renewable energy.

One of the first things we did when we started publishing this magazine many years ago was to give a subscription to our local public library.

You may want to do the same for your local public library. We'll split the cost (50/50) of the sub with you if you do. You pay \$11.25 and Home Power will pay the rest. If your public library is outside of the USA, then we'll split the sub for your location, so call for rates.

Please check with your public library before sending them a sub. Some rural libraries may not have space, so check with your librarian before adopting your local public library. Sorry, but libraries which restrict access are not eligible for this Adopt a Library deal—the library must give free public access. — Richard Perez

To Adopt a Library write or call


Home Power®

PO Box 520, Ashland, OR 97520 USA

1-800-707-6585 or 541-512-0201 or FAX 541-512-0343

hp@homepower.com • www.homepower.com



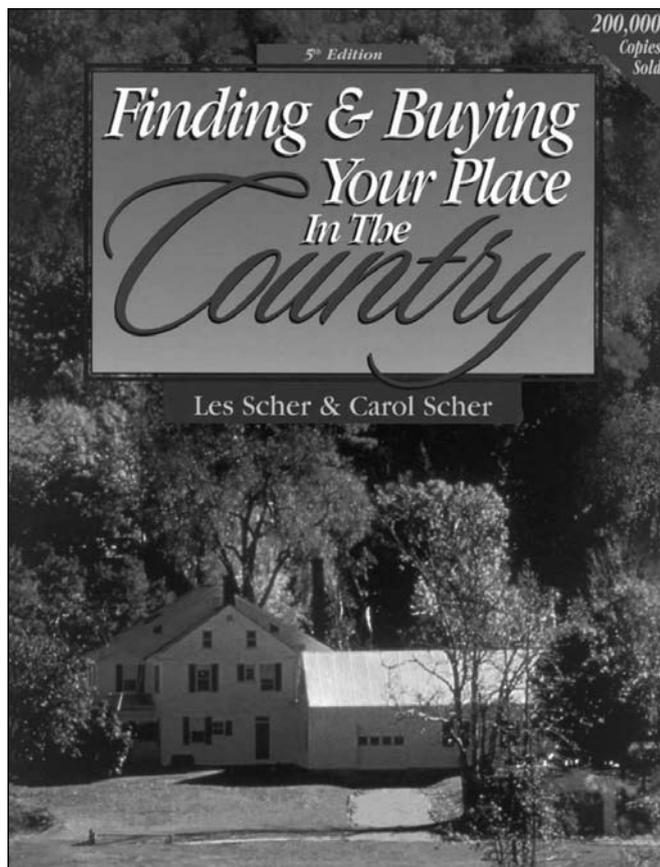

Finding and Buying Your Place in the Country (Fifth Edition)

Les Scher and Carol Scher

Reviewed by Eric Grisen

©2002 Eric Grisen

The fifth edition of *Finding and Buying Your Place in the Country* is still the best resource available for expert advice on purchasing rural land. It's like having an old-timer's and lawyer's advice at your fingertips. If you're buying a rural home or property for the first time, this book is a must. The third edition was also found to be indispensable in a review appearing way back in *HP29*.

I suppose an eager reader might attack this 417-page book straight through, reading it start to finish. My partner and I use it for reference on specific issues when needed. We've found that it addresses every subject we've needed information on—wells, water rights, and how much water our home and garden will need; what the zoning abbreviations stand for; building permits and dealing with county officials; and road easements—to list a few.

The book has thorough and detailed information, accompanied by plenty of graphics. The authors have provided sample documents, detailed drawings, and extensive contact information when applicable. Although the authors' expertise is on California laws and consumer issues, their state-by-state contact listings are complete. In addition to the general table of contents, the book has a detailed index. With 8-1/2 by 11 inch pages and a two-column layout, it's easy on the eyes.

My partner and I are making an offer on an older home and 20 acres in the Cascade mountains near Ashland, Oregon. The 22-page chapter titled "Evaluating Houses, Manufactured Homes, and Other Structures" has been particularly helpful to us.

The authors wrote this section in an organized, linear, foundation-to-attic style that prepares you to start inspecting any house. They have identified common problem areas with foundations, framing, plumbing, electrical, roofing, and other potential trouble spots. They've also made recommendations for finding a professional home and pest inspector. An eight-page section titled "The Property Buyer's Complete Checklist" helps you avoid missing any inspection or required piece of information.

Finding and Buying Your Place in the Country has extensive sections aimed at helping you negotiate to buy a home or land. The book can help you evaluate the price of the property, and bargain the seller's price down. Additional chapters give model contracts of sale and option agreements, as well as steering you through the escrow process.

In Chapter 12, "Zoning Laws," the authors introduce the topic of land use and the law. They emphasize the importance of researching the zoning where you want to live to make sure you can do what you want to do with your property. Their general instructions helped me research the zoning for specific parcels that we found for sale.

It was even more useful to be able to research how the surrounding land was zoned. From the book's list of common zoning symbols and brief descriptions, I was

able to determine the difference between property listings that were zoned rural residential, woodland reserve (or woodland resource depending on your perspective), and forestry/recreation. Some zoning types allow homesites, while others do not.

I think *Finding and Buying Your Place in the Country* is a good book—I recommend it. It's a key resource about the nuts and bolts of property law, and it's packed full of details. My partner and I are thankful we found this book before we blindly bought country property. It's nice to have a guide through the many challenges of buying or building a home in the country.

Access

Finding and Buying Your Place in the Country, (Fifth edition) by Les Scher & Carol Scher, 2000, ISBN 0-7931-4109-5, US\$27.95 plus shipping from Dearborn Financial Publishing, Inc., 155 North Wacker Dr., Chicago, IL 60606 • 800-245-2665 or 312-836-4400 Fax: 312-836-9958 • bermel@dearborn.com www.dearborntrade.com

Eric Grisen, c/o Home Power, PO Box 520, Ashland, OR 97520 • eric.grisen@homepower.com



Amazon Power Company

Photovoltaic Systems
for Home, Water pumping, & RVs
System Design, Sales,
& Installation

Look for me in Hawaii...

Donna Fischer
Amazon Power Company
RR 1, Box 1, Embudo, NM 87531
808-965-5108

Colorado Electrical Contractor Lic. # 025230
New Mexico Electrical Contractor Lic. # 80290



Back Issues of Home Power!

Check out our Web site: www.homepower.com
It contains an index of all articles back to issue #1.

You can buy back issues individually:

- \$6.25 each for 13 and 16 through 20
- \$7.75 each for 21 through 45 (except for 35, 36, 38, 40, 41)
- \$8.75 each for 46 through 84 (except for 59-61, 63-67, 79, 81, 82)
- \$9.95 each for 85 through current

(Shipping included)

- OR -

Special Deal: All available back issues for \$125

Shipping: \$20 USA, \$30 Canada, \$40 International

Check with your local library—through interlibrary loan you can get back issues.
The Jackson County Library in Oregon and the Alfred Mann Library at Cornell University have all issues.

Or, get the CD-ROMs for \$29 each Special Deal: \$125 for all five

Solar2 (1-42), *Solar3* (43-60), *Solar4* (61-70), *Solar5* (71-76), and *Solar6* (77-82)

Shipping for single CDs: \$2 USA, \$3 Canada, \$4 International Shipping for all five CDs: \$8 USA, \$9 Canada, \$12 International



Home Power, PO Box 520, Ashland, OR 97520 • 800-707-6585 • 541-512-0201



**Good Info!
Good Deal!**
800-707-6585
In USA

HAPPENINGS

INTERNATIONAL

Free instructions, photos, drawings, & specs to build solar cookers & water systems with local materials, purchased with local currency. Sunstove, www.sungravity.com

Green Empowerment finances microhydro & other RE projects in Nicaragua, the Philippines, & Borneo. Volunteers needed. www.greenempowerment.org

Solar On-Line (SôL) Internet courses. Year-round. PV Technology & Opportunities—A Qualitative Overview; PV Systems Design: Basic Course; PV Systems Design: Professional Course; PV System Installation: Hands-On! Solar Homes; Healthy Buildings; Solar Energy for International Development. SoL, PO Box 217, Carbondale, CO 81623
Fax: 559-751-2001 • sol@solenergy.org
www.solenergy.org

CANADA

Microhydro Courses: Assess site, determine feasibility, & design & install a system. Apr 26–28, '02, Selkirk College, Nelson, BC, 250-352-6601. May 3–5, '02, College of New Caledonia Prince George, BC, 250-561-5801. May 10–12, '02 Univ College of Cariboo Kamloops, BC, 250-828-5039. US\$80 to US\$160. Robert Mathews, 250-679-8589
www.energyalternatives.ca/mhcourse.htm

Alberta Sustainable House; open house 3rd & 4th Saturdays, 1–4 pm. Cold-climate features & products for health, environment, conservation, RE, recycling, efficiency, self-sufficiency, appropriate technology, autonomous & sustainable housing. Free. 9211 Scurfield Dr. NW, Calgary, AB T3L 1V9 Canada • 403-239-1882
Fax: 403-547-2671 • jdo@ucalgary.ca

The Institute for Bioregional Studies demonstrates & teaches ecologically oriented, scientific, social, & technological achievements. IBS, 393 University Ave., Charlottetown, PEI C1A 4N4 Canada 902-892-9578

Vancouver Electric Vehicle Association. Call for meeting info. PO Box 3456, 349 West Georgia, Vancouver, BC V6B 3Y4 Canada 604-878-9500 • info@veva.bc.ca
www.veva.bc.ca

NEW ZEALAND

Feb. 2–3rd '02; Canterbury Sustainability Expo, Christchurch. Alternative energy, building & construction options, heating options, energy efficient housing & appliances, home products, Gov. info, new & emerging technologies, composting

toilets & greywater, alternative transport, education, speakers, demonstrations, exhibits. John, 025-576527

NATIONAL U.S.

Pollution prevention video series. Appalachia: Science in the Public Interest offers 42 videos, incl. Solar Dry Composting Toilets, Solar Hot Water Systems, PV, Solar Space Heating, Solar-Powered Automobiles, Quilted Insulated Window Shades, & more. US\$25 + S&H, broadcast-quality tapes available. ASPI Publications, 50 Lair St., Mt. Vernon, KY 40456 606-256-0077 • Fax: 606-256-2779 aspi@kih.net • www.kih.net/aspi

American Wind Energy Association. Info about U.S. wind industry, membership, small turbine use, & more. www.awea.org

State financial & regulatory incentives for RE: reports. North Carolina Solar Center, Box 7401 NCSU, Raleigh, NC 27695 919-515-3480 • Fax: 919-515-5778
www.dsireusa.com

Energy Efficiency & Renewable Energy Clearinghouse (EREC): Insulation Basics (FS142), New Earth-Sheltered Houses (FS120), PV: Basic Design Principles & Components (FS231), Cooling Your Home Naturally (FS186), Automatic & Programmable Thermostats (FS215), & Small Wind Energy Systems for the Homeowner (FS135). EREC, PO Box 3048, Merrifield, VA 22116 • 800-363-3732 • TTY: 800-273-2957 • energyinfo@delphi.com
www.eren.doe.gov

Energy Efficiency & Renewable Energy Network (EREN): links to gov. & private internet sites & "Ask an Energy Expert" online questions to specialists. 800-363-3732 • www.eren.doe.gov

Green Power Web site: deregulation, green electricity, technology, marketing, standards, environmental claims, & national & state policies. Global Environmental Options & CREST • www.green-power.com

National Wind Technology Center. Assists wind turbine designers & manufacturers with development & fine tuning. Golden, CO 303-384-6900 • Fax: 303-384-6901

Sandia's Stand-Alone PV Systems Web site: design practices, PV safety, technical briefs, battery & inverter testing, www.sandia.gov/pv

Federal Trade Commission (free pamphlets): Buying an Energy-Smart Appliance, Energy Guide to Major Home Appliances, & Energy Guide to Home

Heating & Cooling. Energy Guide, FTC, Rm 130, 6th St. & Pennsylvania Ave. NW, Washington, DC 20580 • 202-326-2222 TTY: 202-326-2502 • www.ftc.gov

Solar Curriculum for schools. 6 wk. science curriculum or individual sessions. Free! 30 classroom presentations & demos using free or low-cost materials. Susan Schleith, Florida Solar Energy Center 321-638-1017 • www.fsec.ucf.edu

ALABAMA

Centre, AL. The Self-Reliance Institute of NE Alabama seeks people interested in RE, earth-sheltered construction, & other self-reliant topics. SINA, 6585 Co. Rd. 22, Centre, AL 35960

ARIZONA

Apr. 19–21, '02; AZ RE Expo; Prescott Valley, AZ. For consumers, educators, contractors, youth, & public. Info: Prescott Valley Economic Development Found., 888-240-4256 • www.pvedf.com

Info on tax credits for solar in AZ. ARI SEIA, 602-258-3422

Scottsdale, AZ. Living with the Sun free lecture series, 3rd Wed. each month, 7–9 PM, City of Scottsdale Urban Design Studio. History & current concepts, design, applications, solar heating & cooling, architecture, landscaping, PV & cooking. Dan Aiello, 602-952-8192, or AZ Solar Center, www.azsolarcenter.org

ARKANSAS

Sun Life Constr. by Design: Seminars 3rd Sun. of month. Hands-on, incl. ferro-cement, building dwellings for minimal materials expense. Loren Impson, 71 Holistic Hollow, Mt. Ida, AR 71957 • 870-867-4777 loren@ipa.net • www.Sun4Life.com

CALIFORNIA

Arcata, CA. Campus Center for Appropriate Technology, Humboldt State University. Ongoing workshops & presentations on alternative, renewable, & sustainable living. CCAT, HSU, Arcata, CA 95521 707-826-3551 • ccat@axe.humboldt.edu
www.humboldt.edu/~ccat

Rebates for PV & wind. CA Emerging Renewables Buydown Program, CA Energy Comm., 800-555-7794 or 916-654-4058 callcntr@energy.state.ca.us
www.consumerenergycenter.org/buydown

Energy Efficiency Building Standards for CA. CA Energy Comm, 800-772-3300 www.energy.ca.gov/title24

Solar e-Clips, free weekly email newsletter. CA news & info solar energy. To subscribe email with "Subscribe" in subject to solareclips-request@californiasolarcenter.org

Mar. 4–9, '02; SEI PV Design & Installation Workshop, Sacramento, CA, Municipal Utility District (SMUD) Energy & Technology Center. Hands-on basics of PV. US\$550. For SEI contact info, see Colorado.

Sept. 20–22, '02; CA Energy Expo 2002, San Diego Convention Center. Latest RE technologies & energy conservation strategies. Info: Richard Brown, 23672 San Vicente Rd., Ste. 363, Ramona, CA 92065 760-653-4022 • rcb@mail2usa.com www.californiaenergyexpo.com

COLORADO

Carbondale, CO. SEI: hands-on workshops. 1–2 week sessions. PV Design & Installation, Advanced PV, Wind Power, Microhydro, Solar Cooking, Environmental Building Technologies, Solar Home Design, & Straw Bale Construction. Solar Energy International (SEI), PO Box 715, Carbondale, CO 81623 • 970-963-8855 Fax: 970-963-8866 • sei@solarenergy.org www.solarenergy.org

IOWA

Prairiewoods & Cedar Rapids, IA. Iowa RE Assoc. meets 2nd Sat. every month at 9 AM. All welcome. Call for schedule changes. IRENEW, PO Box 355, Muscatine, IA 52761 • 319-288-2552 irenew@irenew.org • www.irenew.org

KENTUCKY

Livingston, KY. Appalachia: Science in the Public Interest. Projects & demos in gardening, solar, sustainable forestry, more. ASPI, Rt. 5, Box 423, Livingston, KY 40445 Phone/Fax: 606-453-2105 • aspi@kih.net www.kih.net/aspi

MASSACHUSETTS

Greenfield Energy Park needs help preserving the historic past, using today's energy & ideas, creating a sustainable future. Greenfield Energy Park, NESEA, 50 Miles St., Greenfield, MA 01301 413-774-6051 • Fax: 413-774-6053 nhazard@nesea.org • www.nesea.org

MICHIGAN

Tillers International, classes in draft animal power, small farming, blacksmithing, & woodworking. 5239 S 24th St., Kalamazoo, MI 49002 • 616-344-3233 Fax: 616-344-3238 • TillersOx@aol.com www.wmich.edu/tillers

MONTANA

Whitehall, MT. Sage Mountain Center: one-day seminars & workshops, inexpensive sustainable home building, straw bale constr., log furniture, cordwood constr., PV, more. SMC, 79 Sage Mountain Trail, Whitehall, MT 59759 Phone/Fax: 406-494-9875 cborton@sagemountain.org

NEVADA

Jun. 15–19, '02; Solar 2002: Sunrise Sustainability Expo. Reno, NV. Annual American Solar Energy Society conference. ASES, 2400 Central Ave. #G-1, Boulder, CO 80301 • 303-443-3130 Fax: 303-443-3212 • ases@ases.org www.ases.org

NEW HAMPSHIRE

Spinning a Web of Solar Spirits; workshops on living with the sun. 1st Wed. every month. Sunweaver, 1049 1st, NH Turnpike, NH 03261 • 603-942-5863 Fax: 603-942-7730 • fonature@tiac.net

NEW YORK

Apr. 27, '02; North Country Sustainable Energy Fair, Canton Middle School, Canton, NY. Workshops, activities, vendors, exhibitors, & presenters. Home tour Apr. 28. Scott Shipley, 315-386-4928 cobbship@northnet.org • www.ncenergy.org

RE Loan fund. Low interest financing: NY Energy \$mart Program, NY State Energy R & D Authority, 518-862-1090 ext. 3315 Fax: 518-862-1091 • rgw@nyserda.org www.nyserda.org

NORTH CAROLINA

Saxapahaw, NC. How to Get Your Solar-Powered Home: Seminars 1st Sat. each month. Solar Village Institute, PO Box 14, Saxapahaw, NC 27340 • 336-376-9530 Fax: 336-376-1809 • solarvil@netpath.net

OREGON

Cottage Grove, OR. Adv. Studies in Appropriate Tech., 8 wks., 4 interns per quarter. Aprovecho Research Center, 80574 Haxelton Rd., Cottage Grove, OR 97424 541-942-0302 • dstill@epud.org www.efn.org/~apro

Feb. 8–10, '02; Introduction to Permaculture: A Design Workshop for Women on Self-Reliant Living. Lost Valley Educational Center, Dexter, Oregon. Comfortable, supportive environment for women to learn philosophy, principles, strategies, & techniques. US\$180–\$225, incl. materials, food, & lodging. Contact: Jude, 1161 Lincoln St., Eugene, OR 97401 541-342-1160 • hobbsj@efn.org

Mar. 29–31, '02; The Stoppiello Whole-House Workshop, John Day, OR. (See EORenew below for access info.)

Jul. 26–28, '02; SolWest Renewable Energy Fair, John Day, OR. Exhibitors, workshops, Electrathon racing. Pre- & post-SolWest workshops, including system installation. EORenew, PO Box 485, Canyon City, OR 97820 • 541-575-3633 • info@solwest.org www.solwest.org

Sept. 21, '02; All-day Solar Cookery Equinox Extravaganza, Seneca, OR. (See EORenew access info above)

RHODE ISLAND

Energy Co-op provides RE, energy efficiency & conservation services, & group purchases of "Energy Star" products. Erich Stephens • 401-487-3320 erich@sventures.com

TENNESSEE

Summertown, TN. Kids to the Country: nature study program for at-risk urban TN children. Sponsors & volunteers welcome. The Farm, Summertown, TN 38483 931-964-4391 • Fax: 931-964-4394 ktcfarm@usit.net

Apr. 22–27, '02; SEI PV Design & Installation Workshop, Summertown, TN, Ecovillage Training Center on The Farm. Hands-on basics of PV. US\$550. (Lodging, camping & meals available). For SEI info, see listing in Colorado.

TEXAS

El Paso Solar Energy Association bilingual Web site. Info in Spanish on energy & energy saving. www.epsea.org/esp/

El Paso Solar Energy Association: meetings 1st Thur. each month. EPSEA, PO Box 26384, El Paso, TX 79926 • 915-772-7657 epsea@txses.org • www.epsea.org

Houston Renewable Energy Group: meets last Sun. of odd months at TSU Engineering Building, 2 PM. HREG, PO Box 580469, Houston, TX 77258 • jferrill@ev1.net www.txses.org/hreg/

VIRGINIA

Info & services on practical solar energy apps in VA. VA Solar Energy Assoc., the VA Solar Council, and the VA chapter of SEIA. Info: VA Div. of Energy, 804-692-3218

WISCONSIN

MREA Workshops: Solar Space Heating, Wind Systems Installation, PV Installation, Straw Bale Construction, Masonry Heaters, Sustainable Living Workshops, RE for the Developing World. Significant others half price. MREA, 7558 Deer Rd., Custer, WI 54423 • 715-592-6595 • Fax: 715-592-6596 mreainfo@wi-net.com • www.the-mrea.org



To have your event included in the *Home Power Happenings* listing, send e-mail to happs@homepower.com or snail mail to: Happenings, c/o Home Power, PO Box 520, Ashland, OR 97520



the Wizard
speaks...

The Water Barrier

After the hydrocarbon economy comes the hydrogen economy. This new energy economy may have a serious potential limitation. It might be limited by how much water is available for use in the process of storing hydrogen. This limitation is the "water barrier." There may not be a problem here, but if we had thought about carbon dioxide emissions earlier, we might not have a problem with global warming today.

This water limit is affected by how much water is used for drinking, food growing, washing, and other necessary activities. It is also greatly affected by how much total water can be removed from the biosphere for all human uses. Sooner or later, a point may be reached where removing more water from the biosphere will quickly degrade the environment. Before this point is reached, we must find new ways to store energy.

Batteries and new types of capacitors may take up some of the need. Also, there are potential superconductor, magnetic, and flywheel storage technologies. However, it will take new breakthroughs in physics, engineering, and materials science before the water barrier can finally be breached.

In the long term, it may be better to seek our energy from new technologies that do not require storage. Two possibilities are energy from the subtle fields of space, and energy from quantum fluctuations of space. We can hope that a combination of technologies will eventually emerge that are clean, efficient, and ecologically sound.



Solar Hydrogen Chronicles

Edited by Walt Pyle • First Edition 1998

A collection of articles from *Home Power Magazine* on Hydrogen Technology for small-scale systems

Hydrogen Production

Hydrogen Purification

Hydrogen Storage

**Utilization for Cooking, Heating,
& Electricity Generation**

118 pages of useful information

Extensively Illustrated • \$25 + \$3 S/H = \$28

H-Ion Solar Inc.


6095 Monterey Avenue

Richmond, CA 94805 USA

phone: 510-237-7877 • fax: 510-232-5251

email: hionsolar@aol.com

website: www.hionsolar.com



*"First-rate history, excellent
writing, great storytelling..."*
—Neville Williams, SELCO

FROM SPACE TO EARTH The Story of Solar Electricity John Perlin

From Space to Earth, by the author of the critically acclaimed *A Forest Journey* and co-author of the solar classic *A Golden Thread*, tracks the evolution of photovoltaics, the direct conversion of the sun's energy into electricity via solar cells.

From shaky 19th-century beginnings, to high-visibility success in the space program, to our increasing—and largely unrecognized—reliance on this subtle, silent energy source, John Perlin tells the true and amazing story of the technology and the truly amazing individuals who brought it to light. Details current advances, and examines applications in both the developed and developing world.

*From space to earth. From Mali to Manhattan.
From the mountains to the oceans. From the utility to your roof.
The history of photovoltaics.*

"An important contribution on the eve of the 'solar century.'"

Available for \$35 postpaid from **aatec publications**
ISBN 0-937948-14-4 240 pages 125+ illus. hardcover July 1999 \$32

To order, or for more information, contact **aatec publications**

800.995.1470 voice or 734.995.1470 • 734.995.1471 fax

aatecpub@mindspring.com

PO Box 7119 Ann Arbor MI 48107

Visa/MasterCard/American Express accepted.



Energy Outfitters Moves To Grants Pass, Oregon



Energy Outfitters Ltd. is pleased to announce their move and expansion into Grants Pass, OR.

Bob Maynard, the company's founder says "moving from Cave Junction, our home for the past 10 years, to Grants Pass gives us a greater ability to serve our customers and manage our rapid growth. We'll be offering RE training sessions and our demonstration area will show several manufacturer's product up and running. We'll also have a production area for integrating our ETL listed systems."


"Our larger warehouse space and improved distribution facility will allow us to increase the number of products we carry and stock more inventory. Our goal is to ship 98% of orders complete, same day from our facility" says Ray Ogden, partner and RE contractor channel manager.

The new building provides a threefold increase in space and includes modernized office and showroom. Come visit us!



energyoutfitters.com

543 Northeast "E" St ▪ Grants Pass, Oregon 97526
541 476 4200 ▪ 800 GO SOLAR ▪ 800 467 6527

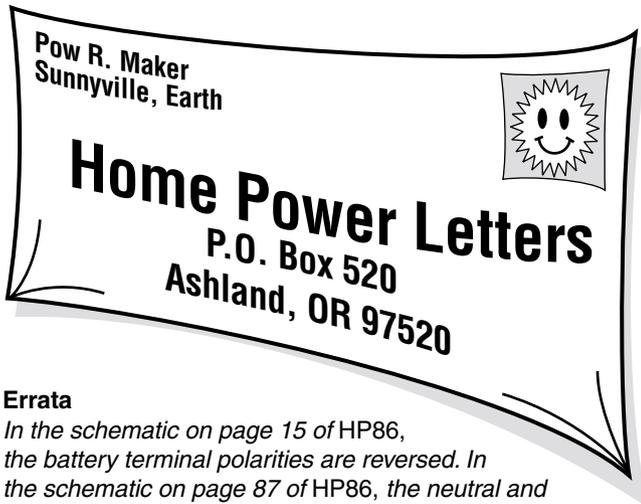

Errata

In the schematic on page 15 of HP86, the battery terminal polarities are reversed. In the schematic on page 87 of HP86, the neutral and ground labels are reversed on the AC side of the inverter. The green/ground wire should be bonded to the inverter case and the neutral/white wire should be connected to the inverter's neutral output wire.

No Free Lunch

Dear Sirs, This is a recap of a letter I already sent to *Windpower Monthly* magazine. In the Techwatch section of the June 2000 issue of *Popular Mechanics*, they have an article entitled "Wind Recharger for EVs," which is about the Automotive Rotor Blade System developed by the Genesis Engineering Group of Hemet, California (maybe that company folded, I cannot find it anywhere). This is a horizontal windmill that is installed atop electric cars and vans, and automatically adjusts its blades to accommodate wind from diverse directions to power a generator that recharges the vehicle's batteries.

Why stop there? Rehire the entire population of Flint, Michigan to mass-produce much larger versions of these units. Then use the power line repair crews to install them atop all the electric power line towers in the world, to derive power from the wind up there, and feed it into the local grid. Their collective output of clean energy would be enormous. But why stop there? Make smaller versions of this horizontal windmill and install them atop all telephone poles and lamp posts, and house rooftops as well. Solar panels could be added to the unit's top, so let's call it "Suntops." The Suntops would be so valuable that we could use them as a form of barter to pay off our debts to other countries, since all nations need clean energy now. Best Regards, Bob Schreib, Jr.

Hello Bob, The Genesis Engineering Group didn't understand basic physics, which probably had something to do with the company folding!

There are always losses in any energy conversion process. Mounting a wind generator on a vehicle has a negative impact on the vehicle's aerodynamics. In this case, just like putting a bike rack on your car or a lumber rack on your truck decreases your gas mileage, it would take more energy out of the EV's battery bank to propel the vehicle equipped with the wind generator. The wind generator would never come close to offsetting the energy lost to the increased air friction it was causing.

Transmission line towers aren't engineered for the forces associated with wind turbines. But the installation of utility scale wind projects is gaining momentum here in the U.S. The energy produced by these wind farms is cost effective when compared to coal-fired generation. And the wind farms can be up and running in about a third of the construction time. Here in the Pacific Northwest, one of the world's largest wind farms is under construction. Its output will be 265 MW, enough electricity to power over 50,000 homes.

As you suggest, solar-electric (PV) panels are the perfect technology for distributed power generation. Telephone poles and lamp posts aren't the best place to mount them. But approximately one third of the homes in America have unobstructed, south facing roofs that could be retrofitted with PVs. Now all we have to do is start buying PVs! Take it easy, Joe Schwartz • joe.schwartz@homepower.com

Refrigerator Experimentation

Dear *Home Power*, Your readers might be interested in my experience with a wrinkle in refrigerator technology. Last month, the propane refrigerator that I use at my remote cabin in Sonoma County, California gave up the ghost. I had just read the "Things That Work!" review in *HP84* of the big Maytag refrigerator, but could not justify anything so large and expensive for occasional weekend use.

Since I have a small surplus of PV generated power, I decided to take a chance on a 4 cubic foot electric refrigerator, Magic Chef brand, made in Korea by Daewoo, which I bought at a yard sale for US\$20. My hope was that even though it wasn't in the Sun Frost category of efficiency, it might be good enough. Using a surplus 110 V KWH meter, I measured power consumption of 0.5 KWH per day with the control set for 32°F inside at 65°F room temperature. This was good enough for me.

Next I decided to see if adding insulation to the outside of the refrigerator would make things even better. Since I had tried this before with disappointing results, I did an experiment with a one square foot piece of two inch thick rigid foam insulation taped to the side of the refrigerator. I used a Fluke model 52 digital thermometer to measure the temperature on both sides of the insulation. With the refrigerator running, I expected to see a reading at the side of the insulation that was next to the refrigerator several degrees cooler than room temperature. I was amazed to find the opposite. The insulated surface of the refrigerator was 5°F warmer than the outside air.

Investigation revealed that the condensing coils of the refrigerator, which dissipate the heat from the compressed refrigerant, were not in their usual place behind or underneath the unit. Instead, they are built into the top and sides, underneath the sheet metal. While this probably improves efficiency and means you don't have to worry about dust accumulation on the coils, it does mean that adding insulation to these areas would be a disaster in terms of efficiency.

Footnote: I can't say enough good things about the Fluke digital thermometers. They use one or two thermocouple probes to measure from below -300°F to over 2,500°F with a

resolution of one tenth of a degree. They are rugged, simple to use, and accurate. I see them on eBay selling for US\$60 to \$80. No one who is interested in homebrew energy should be without one. John Kelly

Energy Bumper Sticker

Hello, I enjoyed your article in the December *Home Power* magazine about "Energy and Security." Just before I read it, I had a bumper sticker made, which I am sending to you as an attachment. I hope it gets people to think of conservation as not just another "Tree Hugger" wimpy idea. Gene Cass

Conserve Gas
Help U.S. get out
of the Middle East

Modern & Efficient Is OK

I generally very much enjoy your magazine. However, I want to rebut a letter (*HP86*, page 144) by Eric Kahmann regarding the Davisons' "New Tara" system in *HP84*. I couldn't disagree more with the writer of this letter (no offense intended to author). I am all for conservation and renewable energy. However, I quite like my modern lifestyle. I even like my phantom loads. More specifically, I like the things they do for me. I do not intend to count them, nor do I intend to put them on a switch. I'm quite happy to let them draw a few watts continuously so I can have the convenience they provide.

When I build my next house, I intend to build it to be as efficient as practically possible, and use alternative energy sources where practical. However, I do *not* intend to lower my standard of living; I intend to raise it. There is nothing wrong with that.

When the renewable energy people stop expecting everyone else to downgrade their living standard and live in houses that have few creature comforts and require the owner to babysit the energy system, and when such adequately sized systems are financially practical, then renewable energy systems will explode in popularity. I say more power to the owner of New Tara. Good show! If I had the money, I'd do something similar. (I'd be driving an electric SUV too, but that's another story.) Bring that functionality to the average Joe, and you'll have more customers than you can count.

Let's take an example. Suppose hypothetically that we had an energy technology that had a capital cost of around US\$1 per watt, not including installation and accessories. If I were trying to figure out how to bring it to the average Joe, it would

be hard. I have an all-electric house in Georgia. Energy usage varies from 50 to 70 KWH per day. Putting this hypothetical 40 KW energy system on it to handle peak loads would cost about US\$40,000. Payback would be about 20 years—not too attractive.

However, I have enough sense to know that, if I start telling potential customers to turn off their heat pumps during our *hot, humid* summers, and unplug TVs, VCRs, and clock radios, I'll be beaten before I can start. The scenario is even worse with existing technology at US\$3 to \$6 per watt. Until such time as I can get a more efficient house (may be a while), I'm trying to figure out how to get a bigger energy system or use a smaller one more effectively. Any suggestions you have would be appreciated. Sincerely, Ron Frazier

The Future of RE

I read with some amazement and concern the response by Eric Kahmann to the "New Tara in Georgia." I believe Mr. Davison should be commended for putting his money where his mouth is. He has done more to help the environment than a hundred families running around replacing lightbulbs with compact fluorescents. To imply that his system "darkens the earth" is not only arrogant, but it smacks of class envy. Just who is the pompous soul that can sit in judgement of another's needs, energy or otherwise.

Since the 1960s, I have been called an earth nerd, tree hugger, or just plain out of touch. I can assure you that if you try to sell RE on the basis of its "greenness" or social equality, you will be babbling the same old mantra, while gumming your Granola bar, from your wheelchair in the nursing home.

RE has to be sold on its own merit. Surely, in a country that can sell the notions that an SUV is better than a van that is larger and costs less, that football is not football unless watched on a big screen TV, or life is not complete until you have seen the Harry Potter movie, we can sell the concept of individual energy independence. This means all the energy people want and need.

Imagine the RE sales potential if prime time TV ran ads showing how you can "scoff at utility bills," or a scene showing a family fretting over the budget while their neighbor installs a yard light over the pool. "It's modular," he smiles. "If you need more, just add another panel...and it helps save the planet," chirps the wife. Celebrities like Oprah and Rosie gushing over the benefits of their RE system would sell more than all the *Home Power* ads combined.

The right ideas for all the wrong reasons? Who cares? When one billion Chinese or 700 million Indians decide to modernize, there will be no cheap energy, no matter how much is yet to be discovered. The developed countries of the world will not cut back on their energy needs. They will be forced to use renewable vegetable alcohols and oils for hybrid or fuel cell transportation, and nukes for grid power. The more RE sales generated by the "I've got mine" attitude, the smaller those nukes have to be.

Systems like the Davisons' are the wave of the future. Conservation and improved efficiency will help, but no

country in modern times has reduced its standard of living for any significant length of time. Ron Prusinski, Plymouth, Indiana • rbpru@att.net

Hi Ron and Ron, Thanks for your good letters. I'm really glad you took the time to write them, even though they don't reflect my personal philosophy. We all come to renewable energy for different reasons. Thousands of us did start using RE largely for environmental reasons. Many, if not most, systems today are installed not for economic payback or energy independence, but because of a commitment to clean energy. This mindset has in large measure driven the RE industry to its present popularity.

But it is short sighted to think that everyone will view RE the same way any one of us does. While my sympathies are closer to Eric Kahmann's than yours, we ran the Davison system article for many of the reasons you outline. The HP crew still generally feels that it's vital to be efficient and to use energy carefully. Americans use an enormous amount of energy and create a huge amount of pollution for their numbers. We are dealing with unreal energy pricing that does not reflect the true costs of our actions. But you're right that it's rather pompous of folks to look down their noses and sneer at others' choices.

*I'd like to see everyone using RE. I think that's a great focus. We can get sidetracked by arguing about exactly how they use RE, but that's a real distraction. We want Home Power to be a resource for how-to information about RE, whether your motivation is environmental, energy independence, reliability, or just the fascination of making your own. Let's respect each other's motivations, and have fun with this stuff. Your letters are full of good points, and I appreciate them and what you're doing to increase the use of RE. Ian Woofenden
ian.woofenden@homepower.com*

LED Error

Well, I see that in *HP85*, page 142, you did indeed find the error in the resistor value from the article on converting a flashlight to white LEDs (*HP84*, page 74). However, the corrected resistor value (33 ohms) is still not correct. It will, in most cases, work just fine, since it will provide a bit over 27 mA (most LEDs are rated for 30 mA max), but it will shorten battery life by about 35 percent, and will shorten the life of the LED (though probably not appreciably).

As stated in the article, LEDs are most efficient at 20 mA. They do get brighter as more current is applied, but the increase in light output is small relative to the extra power dissipated as heat. This wasted power mostly shortens battery and LED life.

Figuring the resistance value is actually quite easy if you know Ohm's law:


$$V = I \times R$$

Where V is voltage, I is current in amps, and R is resistance in ohms. If we rearrange this to solve for R, we get:

$$R = V \div I$$

So, now to the LED circuit. We know we want "I" to be 20 mA (0.02 A), but what do we use for "V"? Well, another law of

electronics, Kirchhoff's voltage law, states that the sum of all voltages around a circuit must equal zero. So, for the LED circuit:

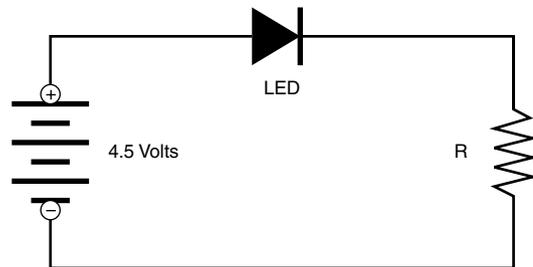

Starting at the lower left with zero, going clockwise, we add 4.5 for the battery, subtract the voltage used by the LED, then, by subtracting the voltage used by the resistor, we'll be back to where we started, with zero:

$$4.5 - V_{LED} - V_R = 0$$

$$\text{or } V_R = 4.5 - V_{LED}$$

Now, from the article, we know that the LED needs 3.6 volts to run at 20 mA so:

$$V_R = 4.5 - 3.6 = 0.9 \text{ V}$$

We see we need to drop 0.9 V at 20 mA through the resistor, so using $V \div I = R$, we get:

$$0.9 \text{ V} \div 0.02 \text{ A} = 45 \text{ ohms}$$

Thanks, C.J. Johansson, Boise, Idaho • cj@boi.hp.com

Hi C.J., Sorry for the error on the value of the resistor in the flashlight article. I let it slip through the proofing process. The flashlight was in fact constructed with 33 ohm resistors. I take the point about the math of Ohm's law, for a drop of 0.9 volts, a 45 ohm resistance would certainly be needed, however, the 0.9 volts is only a nominal figure, taking the drop across the LED as being exactly 3.6 volts. Carrying out tests using LEDs from different manufacturers, I've found that this figure can vary, so I always do a "trial and error" check with the actual components to be used.

The value of 33 ohms was chosen after trials with the actual LEDs used, and the approximate current drawn by each LED was, in fact 22 mA using fresh alkaline cells, close enough to the nominal preferred 20 mA. Like many things in life, the theory and practice don't always work out as planned!

*Incidentally, the original set of cells are still in the flashlight, and are still going strong. But as soon as I can get hold of a "Linear Technology" LT1932 constant current DC/DC LED driver chip, there will be a rebuild under way, and with only two cells needed for eight LEDs! Peter Jones
g4gri@hotmail.com*

CF Color Temperature

Hi *HomePowerites*, One aspect of compact fluorescent lights that I rarely see mentioned is the "color temperature or chromacity," which describes the overall warmth or coolness produced by the bulb. In the Grainger catalog, the

specification charts for fluorescent lamps list these ratings in the “color temp.” column. The numbers range from 2,700 to 5,000, with the lower number the warmest, the higher number the coolest. This info is also found in the column “description,” which indicates the “phosphor” (the substance used to produce the light in the bulb), and often on the lamp base.

For instance, a Sylvania lamp will have something like “CF13DD/E/841” on the base, with the “841” indicating a color temperature of 4,100 (midrange between warmest and coolest). The lamps advertised as “daylight” or “full spectrum” are in the 5,000 range or “850”. Look for an “800” number and the last two digits will tell you what the color temperature is (dropping the two zeros).

So what? My family likes a lot of light to offset the dark and dank of winter. We had been using the commonly available compact fluorescents that are generally at the lower end of the warm range (an 827 phosphor with a color temperature of 2,700). These were OK, but have a warm, yellowish color similar to incandescent lights. We needed something brighter. Higher wattage with the 827 phosphor didn't help. I obtained some “cool white” lamps from Backwoods Solar Electric, which turned out to have the 841 phosphor and brightened up the house a great deal.

It is interesting that all fluorescent lamps of a given wattage have the same lumen rating (amount of light), but the 841 *seems* much brighter since the light is whiter. But it's not as aggravating as the typical cool white found in regular fluorescent lamps. So if you're looking for a way to brighten up the house (not to mention the psyche of your family) during the long winter nights, consider trying some of the cooler fluorescent lamps. Al Latham • thinkedge@olympen.com

Solar Hot Water Gauges

Hi Ken, I just read the articles in *Home Power* magazine and then installed a system on my house. I was wondering where you get the temperature gauges, and about what they cost? I love instrumentation. I enjoyed the articles. Lots of info. Regards, Steve Bunville • slbun@udel.edu

Hi Steve, It is so rewarding to hear that you have installed a solar hot water system after reading the HP articles. That is exactly the intended result!

The temperature gauges are available at any standard plumbing supply house that sells hydronic heating equipment. I like the temperature gauges that come with a separate brass well fitting. The fitting is soldered into place and the temperature gauge pops into the well. It is removable. This also means you can easily align it the way you want. Good alignment is difficult with threaded gauges because you need to install the gauge after all soldering is complete to avoid damaging the gauge with excessive heat from nearby soldering. AAA Solar sells such a gauge manufactured by Pasco. It sells for a little over US\$15.

I would install a gauge on the collector return line and another on the collector supply line. This will tell you what your temperature rise is across the collectors (same as temperature drop across the heat exchanger). You are usually looking for a range of 15 to 20°F. Consider another

gauge in the water line as it exits the heat exchanger on the way to the solar storage tank. Ken Olson • sol@solenergy.org

Old SDHW Panels

Dear *Home Power*, I just purchased eight old 4 x 6 water heating panels for US\$75. They were installed on a hospital years ago and were removed when the building was re-roofed. The labels on the panels say “Daystar 21, Daystar, Burlington, Mass.” I plan to refurbish a few of them and put them back in use. I have not been able to find any info on Daystar, or any specs or how old these units are. The boxes, copper, and glass are in pretty good shape, so I am confident that I can recycle them. I would like to know more about their original configuration, manufacturer, etc. Can you help me? Thanks! Gray Hungerford, Peckerwood, North Carolina

*Hello Gray, Daystar was a division of American Solar King out of Waco, Texas, and they made a collector called the Daystar 1600, which is what I think you have. The 21 refers to 21 square feet, nominal. Standard procedure on panel construction—low iron glass, copper absorber with selective surface, 1/4 inch risers on 2 inch centers, 1 inch headers. The big thing to watch for in this collector is the absorber delaminating from the riser tubes. I don't know what you are going to do with these panels, but do not use water in these panels in the winter, because the risers are too small. Smitty, AAA Solar, Albuquerque, NM
smitty@aaasolar.com*

Battery Float Oil

Dear *Home Power*, I am a solar home owner. Our house is powered by four PV panels and twenty nickel-iron batteries. When the system was installed, the installer did not put any float oil in the batteries. Since then, we have seen a performance decline in our system. We had another consultant look at the batteries, and he said we have a carbonate build-up. We tried flushing the sludge out, but did not have much success. I asked the consultant if there was some chemical that can be added. He said he heard about barium hydroxide. Do you know about this? Or do you know someone who might know a solution to this problem? Thanks, pattih@ci.glenwood-springs.co.us

*Hello Patti, The barium treatment is strictly experimental. I've heard good things and I've heard bad things about it. What I do know is that electrolyte replacement (it sometimes takes two or three replacements), followed by several severe overcharge cycles, will bring these cells back to life. The “float oil” is USP mineral oil, and is available at any drug store. An eighth inch layer does the job. Richard Perez
richard.perez@homepower.com*

Battery Tapping Not Allowed

Hi Richard, I've enjoyed and learned from your hard work for around ten years now, and I wonder if you could point me in the right direction. I have accumulated a number of low voltage charging/powering devices over the years, and I'd like to put together something to get rid of all those wall cubes. I want to take the 24 VDC from our system and tap it out at different voltages (3.7 VDC for cell phones, 8 VDC for kid's walkabout radios, 12 VDC for my 2 meter radios, 6.5 VDC for

fire call pager...you get the idea) to either run or charge these devices. What do you think? Thanks! Eli Spooner

Hello Eli, Bad idea. Tapping a battery in the middle of its series strings will unbalance the series connected cells. I tried center tapping 24 VDC batteries to get small amounts of 12 VDC to run radios. The 24 VDC battery began to suffer very quickly from having series connected cells with differing states of charge.

We've found no good solution for this problem. If you want various voltages of low voltage DC, build a regulator (powered by 24 VDC) to make the various voltages you need.

What we do here is just use the wall cubes powered by the inverter. We always have them on a plug strip, and switch them off when they are not actively being used. Richard Perez • richard.perez@homepower.com

Prius Review, Reviewed

Hi *Home Power*, Andy Kerr's review of the Toyota Prius in *HP85* was spot on. No need to make comparisons between the Prius and an EV because the Prius is not an EV. It is a hybrid. I have a couple of thoughts I want to share with you. I acquired my Prius in late October, just over a year ago. I have put nearly 12,000 miles on it. My drive to work is 11 miles. One-third of it is city streets, and the rest of it is county roads, which here in central New Jersey typically have speed limits of 45 mph. All summer long, I have been getting 55 to 57 miles per gallon on the computer, which translates to about 53 to 55 mpg measured.

This car is absolutely ideal for this kind of driving. About three miles of my trip to work are travelled on battery power alone. At speeds above 41 mph, the gas engine always runs, regardless of load. Once the car is going less than 40 mph, the gas engine will shut down if there is no load on it. One exception to that is as follows: If you are going 45 (or faster) and get on the brakes, the engine will stay running no matter how slow you go, unless you get off the brakes briefly once moving less than 40 mph. If you plan for this ever so brief letting off the brakes, the engine will shut down well before you get stopped and save a bit more gas. If you don't do this, the engine will shut down about 4 seconds after you stop moving. This still saves gas and contributes to the car's SULEV status, but not as effectively as it can when you get the engine shut down sooner. In case you were worried about steering or braking with the engine shut down, don't worry. Both systems are electric, and don't need the engine running to work properly.

It helps a lot to have a vacuum gauge so you know for sure when the engine is running. The LCD is lousy for indicating engine operation. I drive the car differently with engine on vs. off. My mileage went up a bunch once I learned a few secrets about driving this car. If you don't mind jumping through a few hoops, you can get fabulous mileage. If you drive it like an ordinary car, you still get fine mileage for a car of this weight and equipment—mid-40s or better.

Very Important: Toyota says you may not jump start the Prius, but you may trickle charge the 12 V battery at rates not exceeding three amps. I had a problem with a short circuit in

a wiring harness and this ran the battery down. They fixed what turned out to be a tricky problem, and the car has been trouble free since then.

For what it is worth, I think that thing on the back of the trunk lid is aero-trash and took it off about a week after acquiring the car. The trim under the front bumper also comes off quite easily. The motivation for doing this was that when we were in Japan during July of '00, we saw lots of Priuses there with no aero-trash and they looked a lot cleaner. As an engineer who previously worked in computational fluid dynamics, I am of the opinion that the so-called wing does nothing but add weight and drag to the car. Don't need it. Pete Gruendeman
gruendeman@worldnet.att.net

No Nukes—Speaking Out

In *HP86*, the *Power Politics* column hit home. I live within a 10 mile radius of the Indian Point Nuclear Power Plant. I was wondering if I could get reprints of this article in order to wake up New York state to the dangers imposed by not closing this plant. I'd like to get reprints of the article and perhaps subscription forms for *HP* and place them in the mail boxes of the community. I think a lot of people just don't get the real problem, or they're just not informed. Perhaps this article might help people start looking at renewable energy. I'm also interested in getting my public library a subscription to *HP*. Let me know how this can all come about. Thanks for your time, and for creating a magazine with a great deal of information. Steve Jensen

Hi Steve. Glad you find the article useful. We don't do article reprints, but I would be happy to send you an Acrobat PDF file of the article if you'd like. Just give the word. I give you permission to copy the article and distribute it for noncommercial purposes (which means don't make money off them).

*We have a program that helps get Home Power into the libraries. See page 119 for information about our Adopt a Library program. Michael Welch
michael.welch@homepower.com*

Nuclear Waste

I just sent this letter to the editor of the *Patriot News* in Harrisburg, Pennsylvania. So why not send it to *Home Power* too? I'm not talking about spent fuel rods and items that were close enough to the radioactive reaction to become radioactive themselves. No, I'm talking about the money and effort that was wasted in building, licensing, operating, regulating, and protecting nuclear plants like Three Mile Island.

If we could have just spent that money on solar panels, storage, and electronics to connect the power to the grid, we would be far ahead by having a completely clean power source. And it would be so spread out that it would be impossible to attack.

New buildings could have had their roofs subsidized to become solar collectors, as well as old buildings that needed their roofs replaced. Large areas of marginal land could have been developed as "solar farms" to provide an abundance of energy. This technology is not new. It has been around for

twenty years or more. It is being used right now on off-grid homes and businesses as well as by energy conscious people who prefer to produce their own electricity and sell back their excess to the grid.

Hundreds of millions of dollars have been wasted by our government on these nuclear plants in the form of grants, subsidies for research, and construction. A whole branch of our federal government bureaucracy would not be needed—the Nuclear Regulatory Commission. Of course, this is not reflected in the cost of electricity, but in our taxes. And now protection. The National Guard being used to protect nuclear plants is just another subsidy that we pay, with our taxes, in order to have these dangerous nuclear plants in our midst.

I've heard it said that the containment buildings in these nuclear plants are strong enough to withstand an airplane collision. But what if a terrorist plane hits the control room or the spent fuel containers? Either could cause a release of radiation over a widespread area. And if the Price Anderson Act is renewed, our insurance coverage could be only 10 cents on the dollar of a widespread contaminated area (our homes) that no one could safely go into for years.

Let's close these nuclear plants as soon as possible and save billions of tax dollars. But of course, now billions of dollars must be "wasted" to clean up the mess that's already there. Ted Keck at Blackstone Mill • ted@blackstonemill.com

Intelligent Response

Dear Mr. Woofenden, Your comments regarding the terrorist attacks on September 11 are right on target. (*HP86*, page 8) The overwhelming support for the responses taken to eliminate the consequences of unchecked terrorism is mind boggling. Purchasing more solar-electric panels is indeed "a more practical and intelligent response to the murderous attacks." And if in the future, for some curious reason these attacks persist, well then...we'll just go out and buy more panels. Hamilton Easter, Butler, Maryland

Hi Hamilton, Thanks for your comments. It is mind boggling. Out of one side of their mouths, our "leaders" warn us that our attacks on Afghanistan and other places will certainly bring retaliatory strikes. But at the same time, they vehemently deny that our past actions have led to the September 11 attack. Why we think we can teach nonviolence with violence is beyond me. Ian Woofenden ian.woofenden@homepower.com

Powered by Solar, Advil, & Old Crow

To *Home Power* magazine editor and staff, It is with great pleasure that I again renew my subscription to your great magazine! Yours is indeed one of the best magazines covering "green power" technology, as well as some of the economic and political aspects.

I have been a contributor a couple of times regarding solar installation and performance (*HP55* and *HP70*). I would like to say that after several years, our installation continues to function just as planned. For those of us who have made our own installations and for those who are contemplating an installation, the detail as to just where to get parts and their names and numbers is most helpful.

We are hooked up to the grid, so we have uninterrupted power—a great convenience to modern hi-tech equipment. We enjoy an informal relationship with Lee County Electric Cooperative, which has inspected our installation, put it on a TV spot, and written it up in their newsletter as well as a note in their billing to all customers. Our meter runs backward now and then, and I consider our relationship one rabbit to one horse in size. We buy 60 to 70 percent of our KWHs from the co-op.

One might well say, "Solar will never pay for itself." Does your car, or second car, your TV, sauna—I could go on, but you get the drift. Also, where do you think your KWHs are going to come from 50 years from now? Do you think global warming is for real?

Yes, we do a bit of gardening down here in the Everglades National Park, our country's third largest. We even grow bananas, papayas, sweet potatoes, eggplant, green peppers, green onions, and grapefruit. We grow about all of these that we can eat. Does it pay? We don't use chemicals, but it takes a lot of sweat. That even may be healthy—I'll soon be 90 years old. The doctors say I'm a remarkable man and ask what I'm taking. I reply, "Advil in the morning and Old Crow in the afternoon!" With best regards, Lincoln J. Frost, Everglades City, FL • Linckd4qc@aol.com

Missouri Self-Reliant Homestead

Hello *Home Power*, From 1991 until 2000, my wife and I lived on our sailboat in the Pacific. When we bought Natural High, the first thing we did was throw out the generator. Then we installed solar, wind, and water generators for our battery bank. We operated on both 12 VDC and 110 VAC.

We are now developing a homestead in northern Missouri. It will include our home and a guest house. Power will come from solar and wind. Water will come from a small lake and a small pond, as well as water collection into cisterns from our roofs. Our animals and farming will be serviced by our water and power systems. We live in a county that has no permit or inspection system for RE development. Therefore, we may invest as we are able to do so. The county is Grundy on Missouri State Highway 6.

Oh yes, we will have wireless internet service as soon as our tower is installed. And we are only one and a half hours from Kansas City and the airport. The property is rolling hills, meadows, timber, and creeks. It's heaven compared to the cities. Join us!

Alternative power is not difficult. In fact, using nature is much simpler than the way most of us have lived. But once you start, you and your family will be hooked—whether on a boat, in an RV, or on a family farm. Self-reliance through natural power is one of life's mysterious freedoms—that is until you and your family experience it. Steve and Peggy Horton hortonsw@aol.com

Where Are You, NY RE Industry?

Dear *Home Power*, We are building a timber framed home off-grid on 150 acres, and plan to install a 6 to 8 KW RE system with a budget of US\$50K, and could go higher. What's amazing to us is that we have received no responses

to our e-mails for bids, catalogs, and help. We plan to expand the PV system to handle greenhouse hydroponics and some animal barns. Is the PV industry dead in New York? Pete Reynolds • mcrey@taconic.net

R-Value of Concrete

Great article in *HP86* by Douglas Stockman, "Renewable Energy in the Cloudy Northeast." Nice to see someone fight City Hall and win! I question the insulating value of the concrete block basement wall, foam filled, estimated at R-20. I live in an older subdivision of single story concrete block houses on block foundations. These buildings are very cold in this climate, and various schemes have been tried to make them more liveable, none very successful. Most tables I have seen rate block wall at R-3 to R-4, the same as solid concrete or brick. Filling the voids does little to change the thermal properties because heat is conducted very well through the web, in effect bypassing the insulation.

Think of the structure in terms of its heat conduction properties. This is especially true where the outside surface of the wall is in contact with the soil. We insulated the outside of the wall with 2 inches (5 cm) of extruded styrofoam, all we could afford, and cedar siding. We took care to excavate and insulate right to the bottom of the foundation. The experiment was very successful, and we gained a lot of thermal mass as a bonus. Great in the summer heat. One room is noticeably colder, the one where an existing sidewalk prevented excavating and insulating below grade, although the exposed outside wall of the room received the same treatment as the rest of the house, and the whole room is above grade. That proves the "conduction model theory" for me. If it's a problem, insulate the outside as a first choice, the inside as a second choice, but the middle won't help much. Jim Palmer, Courtenay BC, Canada

Calling All Canadians

Dear *Home Power*, Today I received an invitation in the mail to become a member of the Midwest Renewable Energy Association. It brought forward some thoughts I have had lately.

I have been attempting to prod and prompt governments in Canada to support incentives for homeowners who wish to pursue alternative energy. I have e-mailed members of government locally in the City of Barrie, provincially in Ontario, and federally. All I get is lip service that: "Yes, it is a good idea, but..." Most monies are going into research into how municipalities and institutions can use renewable energy, but the biggest user, the individual home owner and vehicle driver, is getting no help whatsoever.

This brings me to my reason for writing this letter. I would like to connect with *HP* readers if there are any who live in the southern Ontario area, especially within a 100 km (60 mile) radius of Toronto. Are you interested in renewable energy, and in getting in contact with me or each other with the idea of forming some sort of association to promote renewable energy in this area, in Ontario and Canada as a whole? I have listed my contact info below.

Thanks for hearing me and keep up the good work. I download your magazines religiously every two months and

read them from cover to cover. Paul R. Thompson, 73 Briar Road, Barrie, Ontario Canada L4N 3M5 • 705-721-6847 paulthom@rogers.com

I-Renew Guest Editorial

Richard, It was so great to have you all here for the Iowa Renewable Energy Association's (I-Renew) tenth annual Energy Expo, and to have you do a great keynote. I wish I could express how much your support has meant to the members, and especially the board folks who have worked so hard on the expos over the years. I think if this one hadn't flown, it may have been the end of the road for our expo, but I think we really found our place in the universe this year.

I just finished laying out the I-Renew newsletter, and I thought you might enjoy my "From the Prez" editorial. I hope that you don't mind the quote—your speech at the fair was so timely, and I have watched the tape of it with friends several times since. Thanks again, and we'll see you next year! Rich

"By the way, if you want to have a war over oil, leave me out of it... because I don't think we need it. All I have to say is go solar! Go wind! Let a little freedom into your life, and help your neighbors stay free, too." —Richard Perez' keynote address, final remarks at I-Renew's 10th Anniversary Expo, Sept. 8, 2001

I was disassembling the geodesic dome we had erected at Prairiewoods for Expo on September 11th, 2001. It was a warm and windy late summer day, and the trampled grass in the meadow still held the positive energy of the 2,000+ curious and excited visitors who had walked there in the previous days. In dark contrast, the radio in my truck flooded the air around me with news of unspeakable acts of desperate and hateful men.

The attacks held personal significance to me. Though a native Iowan, I lived and worked in and around lower Manhattan for over a decade. As I began to unscrew the bolts that held the dome together, my mind was back in New York City, tracing in vivid detail the sights and sounds of my daily bicycle ride across the Brooklyn Bridge, under the shadow of the twin towers—dodging taxis or catching a tow on the back door of a delivery van—to my woodshop a few blocks north of the World Trade Center.

I sat down and looked up through the triangular sections of the dome, which made the sky and prairie around me look like the colored segments of a stained glass window. I feared for my friends and family back in the city, and for the world, and listened with dull, numb disbelief.

In the months that followed, I kept thinking about the words of Richard Perez during his keynote address, just three days before the attack. He talked about the freedoms that renewable energy can bring. Among them were economic freedom and freedom from wars over oil. Since September 11th, I have read extensively about the roots of the hatred for America in Central Asia and the Middle East, and realized the extent to which motivations for action on both sides of the conflict are determined by the lust for oil.

It is with this knowledge that I invite you all, as members of the renewable energy community, to join me in working

with new and greater resolve, to prove to the world that we in Iowa can become exporters of homegrown energy, that we can significantly reduce our nation's dangerous reliance on vulnerable sources of energy—foreign and domestic crude, natural gas, and nuclear power. We know that we can do this by using the great renewable resources we are blessed with in our state, not the least of which are our minds, hearts, and spirits.

Let us in Iowa and across the nation take this on as our personal responsibility, to make this America's last battle caused by foreign entanglements rooted in oil, and to honor the lives of those forever entombed under the rubble of corporate greed.

Rich Dana, President, I-Renew Board of Directors
irenewsletter@yahoo.com

Analysis of Nuclear Power

It is clear that the constraints on the U.S. economy are different now than they were in the 1960s and 1970s, when most commercial nuclear plants were built. At the time, labor was relatively plentiful (including skilled labor, engineers, researchers, etc.). Construction materials and technology were expensive.

The inverse is true today. Labor is critically short across the board, and this is most acute in the professions. Construction material prices are dependent on productivity, which has been rising steadily over the last 30 years.

Looking at talent as a constraint, the table below is my view of how a nuclear project fits into the scheme of things. "Qualified Constructors," as itemized above, is the number of people who could competently carry out the project. Clearly there is some wiggle room. There are probably more than 10,000 people building commercial strip centers and more than 1,000 people building high schools. Above that scale, however, talent runs out in a hurry.

A Business-Like Analysis of Nuclear Power

<i>Project</i>	<i>Cost Scale (US\$)</i>	<i>Qualified Constructors</i>	<i>Incremental Responsibility</i>
Dog house	100	100,000,000	Protect animal from wind, rain, sun
Storage shed	1,000	10,000,000	Structural integrity, security
Major kitchen remodel	10,000	1,000,000	Electrical, plumbing, appliance installation
House construction	100,000	100,000	Financing, city inspections, historical review, etc.
Commercial strip center	1,000,000	10,000	Financing consortium, environmental impact, public hearings
High school	10,000,000	1,000	Bond issue, competitive bid, infrastructure improvements (streets, utilities, telephone, power)
Major bridge	100,000,000	100	Significant geologic analysis, usage analysis, engineer for corrosion, wind, collision, maintainability, etc.
Major coal burning power plant	1,000,000,000	10	Environmental compliance, transmission integration, process controls, waste heat disposal
Nuclear plant	10,000,000,000	1	Radiation shielding, nuclear materials security, containment structure, community evacuation plan, spent fuels disposition

The South Texas Nuclear Project (STNP) cost about US\$6 billion (in the early 1980s) and took 7 years to build. The combined plant generates about 3,200 megawatts (4 x 800 megawatt units).

If a power plant lasts 30 years, 25 percent of our generating capacity has to be replaced every 7.5 years. If the total capacity of the U.S. power generation infrastructure is 1 million megawatts, we will need to replace 250,000 megawatts over the time required to build a nuclear plant. This has nothing to do with additional capacity; this is purely drop-in replacement.

Using the "too cheap to meter" assumption, we would have to build nuclear power plants at a cost below US\$1 per watt. This means that we need to spend US\$250 billion over the next 7.5 years on power generation infrastructure of one kind or another. This would be 25 very large nukes, using this analysis.

Another way of looking at US\$250 billion: divide by the current average annual wage of US\$30,000, or US\$15 per hour. This is US\$33 billion per year, 2 billion labor hours per year, and 1.1 million people in continuous employment during that time. This is just for the construction of the plants, and has nothing to do with long distance transmission facilities or substations.

A 1.5 megawatt wind turbine is equivalent to a 2,000 horsepower locomotive (divided by 750 to get horsepower). Could we build 700,000 locomotives over the next ten years? If that answer is yes, we could do the same with wind turbines. Meredith Poor, San Antonio, Texas • mnpoor@txdirect.net

Solar Hot Water in the UK

Dear *Home Power*, First, thanks for a great magazine—keep up the good work! Second, I have been following with interest your articles on solar hot water systems and whether two tanks are better than one. Here in the UK, a company called

SolarTwin (www.solartwin.com) has come up with an ingenious system whereby only one tank is required. The system consists of a flat plate panel on the roof with a small PV panel attached to it. This is connected to a small pump in your loft by rubber tubing, which is then fed directly into the top of your hot water tank (so there are no heat exchangers, no toxic antifreeze, and no need for a second tank). The sunnier the day, the quicker the hot water is pumped through the system, and the cloudier the day, the longer the water remains in the panel heating up!

The reason this system is ingenious is the way the flat plate collector on the roof is freeze tolerant (something you need here in the UK!). When the panel is frozen over first thing in the morning, it normally takes about an hour or so to defrost and start working. We have had our system a year and a half, and it is proving very reliable, even pumping plenty of hot water on Christmas Day 2000. Whether this system would work in the U.S., I'm not sure, since I do not know how your hot water systems operate. I hope you find this of interest—keep spreading the word on RE! Yours sincerely, Roger Osborn • rogersborn67@hotmail.com


Light Emitting Diode (LED) Lighting

I was fascinated with the information on LED lights that has been published in *Home Power*. Industrial applications for traffic lights and electrically lit advertising banners take advantage of the long life and low maintenance in replacement/running costs.

For me, the technology was heaven sent, since I am now in Taiwan where lots of this stuff is made and quite inexpensive. I have been tinkering with LEDs, and have found out a few things about them.

Part of the problem of using the LEDs purchased here is that they lack documentation, and it's hard to determine the current limiting resistor to go with the power source that is going to power the LED. Having purchased a digital voltage meter (DVM) and several resistors, the current measured indirectly across the resistor (in series with the LEDs) would allow one to compute the current in the circuit. Several articles suggested a maximum limiting current is 25 milliamps. The spreadsheet chart is enclosed for reference.

**Light Emitting Diode —
Current Flow & Resistance Relationship**

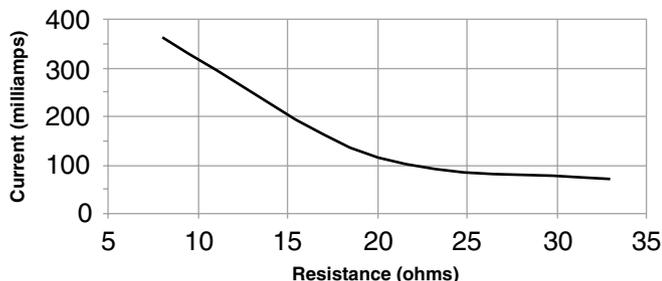

In this case, three resistor values were used against three LEDs and the voltages measured across the resistor, and the conclusion is that once the current exceeds 30 milliamps per LED, a large proportion of the electrical energy would

dissipate as heat energy, and the LED would get fried when the current gets excessive. This is indicated by the steep vertical curve once the current exceeded 100 milliamps or 33 milliamps per LED. A nominal 6 volt battery was used to drive the LEDs.

Based on this experience, my observation is that LEDs are going to make an impact on our lives. They are extremely low consumption in electrical energy for automobiles and public lighting, etc. For aesthetics, colour rendering, and temperature, LED lighting has not reached a mature age for upmarket applications. YC Lim • limyenchung@yahoo.com

GS Catches More Flak

Dear Richard, With respect to the the “Step-By-Step Guerrilla Solar” article in *HP86*, I offer the following suggestion. The inverter should not be plugged into any AC outlet for two reasons. First, with another load on the same circuit, an island might be set up where the inverter continues to operate after the utility shuts down. Second, if an outlet protected by a GFCI is used, the backfed GFCI may either create an island itself or be destroyed in the process. A dedicated circuit is required by the *NEC* for these reasons. Guerrilla solar advocates should not assume that they are always safe when taking shortcuts using listed equipment.

Joe Schwartz was partially correct in his answer to a letter about GFCIs in the same issue. There are circuit breaker GFCIs that operate at 5 milliamps just like the receptacle GFCIs, and they provide the necessary antishock protection for all connected circuits within the number of outlets per breaker allowed by the *NEC*. There are also equipment-protection GFP circuit breakers that operate at 20 to 30 milliamps, but do not provide the necessary antishock protection. John Wiles • jwiles@nmsu.edu

Hello John, Thanks for these tech comments on the “Step-By-Step Guerrilla Solar” article in HP86. We want GS to be safe. It is essential that these GS systems harm no one. This is a nonviolent, nondestructive protest, and we need to give folks the info to keep it this way.

Since all the home's 120 VAC wiring is essentially in parallel, I fail to see the electrical difference between plugging the inverter into a wall receptacle or directly into the mains panel. In either location, the inverter is in parallel with all the loads on that particular 120 VAC leg.

*In terms of GFCI circuit breakers or receptacles, you may be correct—they may be damaged by backfeeding. But household circuits not GFCI protected should have no problems handling the small output of the 100 watt inverter. Considering the load presented by on-grid homes, it is virtually impossible to island an inverter—there simply isn't enough power available unless the entire home is using less than 100 watts. Richard Perez
richard.perez@homepower.com*



**Send us your letters by e-mail to:
letters@homepower.com**

Writing for Home Power Magazine

Home Power is a user's technical journal. We specialize in hands-on, practical information about small-scale renewable energy systems. We try to present technical material in an easy to understand and easy to use format. Here are some guidelines for getting your renewable energy (RE) experiences printed in *Home Power*.

Informational Content

Please include all the details! Be specific! We are more interested in specific information than in general information. Write from your direct experience—*Home Power* is hands-on! Articles must be detailed enough that our readers can actually use the information. Name names, and give us actual numbers, product names, and sources.

If you are writing about someone else's system or project, we require a written release from the owner or other principal before we can consider printing the article.

Article Style and Length

Home Power articles can be between 350 and 5,000 words. Length depends on what you have to say. Say it in as few words as possible.

We prefer simple declarative sentences that are short (fewer than twenty words) and to the point. We like the generous use of subheadings to organize the information. We highly recommend writing from within an outline. Check out articles printed in *Home Power*. After you've studied a few, you will get a feeling for our style.

We edit all articles for accuracy, length, content, organization, and basic English. You can help by keeping your sentences short, simple, and to the point. Our editing crew will make your text shine.

Photographs

We can work from good photographic prints, slides, or negatives. We prefer 4 by 6 inch color prints with no fingerprints or scratches. Do not write on the back of your photographs, since the ink can transfer to the front of the next photo. Please provide a caption and photo credit for each photo. Include some vertical format photos—you might even find your system on *HP's* cover. People are nice in photos; a fuse box is only so interesting, even to solar nerds.

Digital photos should be at least 280 pixels per inch (ppi) at the final printed size. This means that a column width photo should be 1,000 pixels wide or more. A full page width photo should be at least 2,300 pixels wide. Basically, set your

digital camera at its highest resolution, and crop thoughtfully. We prefer Photoshop files, but we can handle the following formats in descending order of preference—EPS, TIFF, and JPEG.

Art, Schematics, & Tables

System articles must contain a schematic drawing showing all wiring. Our art department can make gorgeous diagrams, charts, and schematics from your rough sketches. If you want to submit a computer file of a schematic or other line art, please call or e-mail us first.

For system articles, we require a load table listing all loads, with wattage and run time. We also require an itemized cost table listing each system component and its cost. We prefer to have the tables come to us in Excel format. But we can use them from any word processor or spreadsheet format if they are saved as "text only," with tabs as the delimiter between data.

Computer Talk

We can take text from most word processors. Save all word processor files in "TEXT" or "ASCII TEXT" format. This means removing all word processor formatting and graphics. Use the "Save As Text" option in your word processor.

If you want to send files larger than 5 MB (such as digital photos), use removable media and snail mail it to us. We can read ZIP disks (either Mac or IBM) and CD-ROMs. You can also FTP your large files to us at <ftp://homepower.com>, to the "incoming" folder. Please let ben.root@homepower.com know after you have sent us files via FTP.

Putting It All Together

We get many more articles submitted than we can print. The most useful, specific, organized, and complete get published first. Here are the basic components of a great *Home Power* article:


- Clearly written, well organized, and complete text, with a strong introductory paragraph, subheads for each major section, and a strong closing paragraph.
- Photos (plenty) with clear captions.
- Cost table.
- Load table.
- Other tables, charts, and diagrams as appropriate.
- System schematic.
- Complete access information for author, installers, consultants, suppliers, and manufacturers.

Have any questions? Give us a call Monday through Friday from 9 to 5 Pacific and ask. Or send e-mail. This saves everyone's time. We hope to see your RE project in *Home Power* soon!

Access

Home Power magazine, PO Box 520, Ashland, OR 97520
USA • 530-475-3179 • Fax: 541-512-0343
hp@homepower.com • www.homepower.com
For FedEx, UPS or other shipping only (no postal service):
312 N. Main St., Phoenix, OR 97535 • 541-512-0201





Wrenches vs. Dot Commers

Richard Perez

©2002 Richard Perez

Over the last few weeks of October 2001, I followed with great interest an e-mail discussion between some wrenches (installing RE dealers) and some dot commers (noninstalling RE dealers who specialize in Web and catalog sales).

The Wrench List

The wrench e-mail list began in October of 1999. *Home Power* decided that the folks who were professionally installing or selling RE gear needed a place to share technical and business information. While only RE pros can participate in the list, its archives are open to the public.

The wrench list is a huge success, with more than 150 members and an average of eight postings per day over the last two years. It has been a big help to everyone in the small-scale RE community. Much technical knowledge and many business tips have been shared.

Recently, as happens about three times a year, the folks on the wrench list became polarized into two camps—the wrenches and the dot commers. These two groups share the common goal of getting you to use RE. But they have very different business approaches, and these differences have led to heated discussions. Who has the best approach for spreading the small-scale use of RE—wrenches or dot commers? Well, that's a decision you have to make.

The Wrenches

Wrenches are full service RE dealers. They will visit your site and do a site survey for RE potentials. They will help you measure and estimate your electrical energy load. They will design a working, effective, RE system that will fit your needs and your budget. They will sell you all the equipment you need. They will properly install all this equipment to *NEC*, electrical inspector approved, standards.

Good RE wrenches will show you how to operate the RE system. They will come to your site and fix the system should there be any problems after the installation. Most wrenches are state-licensed electricians or electrical contractors. Wrenches offer turnkey service. All you have to do is turn the key, because the wrench has done all the work.

The Dot Commers

The dot commers tend to be sales-only organizations. They market RE equipment from Web sites and from mail-order catalogs. They primarily service the do-it-yourself market. Their services typically do not include site surveys, load consumption estimates, system design, or equipment installation. This is left up to you, the customer. Many dot commers may have previously been wrenches, and some of them do offer technical support via telephone and e-mail.

Costs—Wrenches vs. Dot Commers

We all know that an RE system can be expensive—from US\$7,000 up. And none of us would rather spend more than less. Fact is, dot commers can sell you RE hardware for less than wrenches can. Why? Compared to wrenches, dot commers have far, far less business overhead.

A working wrench will wear out heavy-duty pickup trucks like you wear out shoes. A wrench has years of time invested in learning how to survey sites, estimate loads, do the actual installations, and pass electrical inspections. A wrench has thousands of dollars invested in specialized tools. And here's the killer—the wrench sells less actual RE hardware than the dot commer.

Since dot commers are high volume dealers, they get bigger discounts from distributors and manufacturers. This enables the dot commer to sell RE equipment for less than a wrench can. Both groups need a profit to survive in business. The dot commer makes this profit on volume sales, and the wrench makes this profit on a much smaller volume of sales and personal service.

The Recent Conflict

The latest discussion between the wrenches and dot commers began when a wrench wrote to the list that he had been called by a person who bought an entire RE system from a dot commer and wanted to hire this wrench to install it. The wrench informed the caller that he did not install equipment that he hadn't sold. The potential customer was offended, and went away (with his pile of equipment).

The wrench gave some very valid reasons for refusing to install the dot com-bought gear. There had been no site survey, load estimate, nor system design. Without these elements, the wrench knew that the system probably would not satisfy the client. The wrench didn't

want the headache of a system that would probably not satisfy its user. And at the bottom line, the wrench could not afford to install equipment that he didn't sell (and make a profit on).

This posting brought protests from the dot commers. While accusing the wrenches of a guild mentality, they stated that site analysis, load estimation, and system design are not rocket science—that anyone can learn to do them. The dot commers also stated that the actual installation would be within the capabilities of any homeowner who could use tools and who had done the homework of learning how to properly install RE equipment.

After hearing both sides of this argument, I realized that both sides were right, and that both sides had a place in the small-scale RE marketplace. The root problem in this case didn't lie with either of these business factions, but with the consumer.

The wrench was right not to try to assemble a possibly inappropriate pile of hardware into a system that would most probably displease the customer. The wrench was right not to take on a job that was profitless for his business.

The dot commers were right on both counts—RE systems can be effectively designed and installed by homeowners who have the knowledge and wrenching skills. Only the customer was wrong—he overestimated his knowledge and abilities, and expected the wrench to bail him out.

The Ironies of This Argument

The wrenches seem to have forgotten that, almost without exception, they began their careers as do-it-yourselfers. Almost all the wrenches' first systems were done for themselves and installed for their own homes. You have to begin somewhere...

We need more wrenches nationwide. It's silly for these professionals to be driving hundreds of miles to do a site survey or installation. Their time is far better spent working than driving a truck. The best of the new wrenches are beginning their careers just as the old-timers did, by doing it themselves, for themselves. So please, wrenches, realize that the do-it-yourself step is an essential entry portal into your profession. Give them a break.

The dot commers seem to have forgotten that it was the wrenches who pioneered this industry. Without all the work the wrenches have done in the field, there would be no "cookie cutter" designs for the dot commers to market. The dot commers should show the wrenches some respect—it's their work that has led to the spread and success of small-scale RE.

Turnkey or Do-It-Yourself?

Should you purchase a turnkey system, or build one yourself? This is the decision that you, the consumer, must make. If you want to forget about all the details and still have a working system at a reasonable price, a turnkey system installed by a wrench is for you. If you want to learn all about the intricacies of site survey, load estimation, and system design, and you have the experience with tools, the dot commer can save you money on your equipment. The problem is that you have to choose between these two—turnkey or do-it-yourself.

At *Home Power*, we do all we can to educate and inform our readers. If you have been reading *HP* for long, you have the information you need to do a site survey, estimate your load, and design a system. The mechanical and physical skills needed to do an effective installation must be learned, and you may have these skills already. The *NEC* guidelines for installing a code compliant system have been published here, and are also available in the *NEC*.

If you are considering the do-it-yourself approach, please be realistic when you appraise your capabilities. Before you order your equipment, do a site survey, a thorough load analysis, and learn to do an effective design. Realistically evaluate your mechanical and electrical skills. Can you install the system properly and have it pass electrical inspection?

In short, do your homework. We are more than happy to assist you with information and answer technical questions. Our confidence in your abilities and skills is reflected in all the information we publish—we don't just publish those full line schematics because they look pretty.

Room for Both

Home Power accepts advertising from both wrenches and dot commers. We see that both groups are essential to the success of this industry. We know that our readers come in two distinct groups—turnkey folks and do-it-yourselfers. All we ask is that you decide which you are before you plunk down your hard-earned bucks for an RE system.

The decision to hire a wrench or save money by doing it yourself is a tough one. If you opt to hire a wrench, no worries, mate. The wrench takes care of everything. If you decide to go do-it-yourself, there are only problems if you chicken out or botch the job. Then you must seek the help of a wrench to bail you out. This is going to cost money, and your system will probably cost you more than if you hired the wrench in the beginning.

Far be it from me to discourage anyone from designing and installing their own system. This is how I began and

how most wrenches began. This is how we learn and grow. I try to keep *Home Power's* RE system cutting edge, so even today, with pro wrench Joe Schwartz on staff, our system is still do-it-yourself.


If you are planning to do it yourself, at least hire a wrench to review your design. He or she is going to want to see your load analysis and site survey. If you haven't done them up right, you'll be embarrassed, and wasting your money and the wrench's time. The wrench will suggest changes. Make them.

Please don't insult the wrench by asking him or her to meet or beat a dot commmer's price. And ask the wrench what it's going to cost to get bailed out if you are unable to install the system properly. Novice flyers should always have a parachute...

Access

Richard Perez, *Home Power*, PO Box 520, Ashland, OR 97520 • 530-475-3179 • Fax: 530-475-0836
richard.perez@homepower.com
www.homepower.com

Wrench list archives: www.topica.com/lists/RE-wrenches

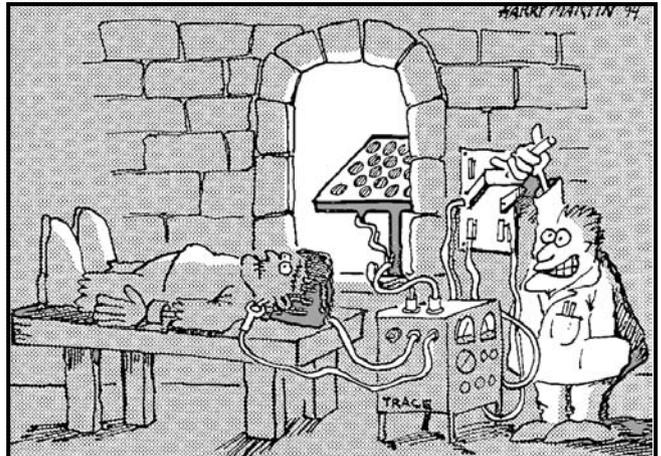

Need a renewable energy quick-start for the ole' brain?

Home Power Quick-Start Subscription Special

Our last six available back issues, plus a one year surface subscription...all for \$45 inside USA
(International extra) (Shipping \$5 in US and Canada, \$7 International)

Home Power

P.O. Box 520, Ashland OR 97520 USA
800-707-6585 in USA, or 541-512-0201
VISA & MC

Pony Enterprises

Offering affordable custom services to small businesses for single projects or recurring needs.

Design & Production Services Include:

- Mechanical Design
- CAD Drafting
- Machining & Prototyping
- DC Wiring
- Short Run Assembly & Production

Documentation & Marketing Services Include:

- Technical Writing
- Article Writing
- Web Site Design & Maintenance

We provide "a little extra horsepower" to take your project to completion.

Pony Enterprises
POB 1113, Felton, CA 95018
phone: 831-429-1994 • email: electro@cruzio.com
web site: www.cruzio.com/~ponyent/

EARTHSENSE

RENEWABLE ENERGY SYSTEMS FOR PUBLIC EDUCATION

- Demonstration and display systems for education and training
 - Hands-on workshops and curriculum
- Custom system design, consultation, and implementation



The "Education Station" mobile RE demonstration

EARTHSENSE is focused on the education of the public through hands-on demonstration and interaction. Schools, events and other organizations can benefit from our full line of RE products and services designed to be educational, functional and fun!

EARTHSENSE

P.O. Box 301
Carbondale, CO 81623
Phone (970) 928-9272 • Fax (970) 928-9696
email: sunsense@sopris.net • www.earthsense.com
The Educational Division of **SUNSENSE**

Q&A

Advice for Whole Solar Thermal House

Hi! I am designing a house with maximum solar energy usage where feasible. The design is a south-facing house, where the south wall is virtually all windows going into large, open rooms.

The first question that I have is about the use of solar collectors for domestic hot water (DHW). I'm in an area where freezing is a concern, so an antifreeze based system is desired. What I've been reading in *Home Power* is that I should use two tanks. The first tank would be heated from the solar collectors, and the hot water from this tank feeds into a second tank for use.

My local solar company is recommending a single, 80 to 120 gallon electric water heater with just the top element in use. This method is usually mentioned as an alternative method in *HP*.

Before I talked with this company, I had been thinking about using one large tank, with an on-demand gas water heater as the backup, or with a standard water heater as the backup. Which way do you think I should proceed? If two tanks are recommended, what sizes? Is there a preference for gas or electric for the second tank?

I am also planning to put in slab heating. The local solar company is recommending five solar collectors in series that go to an on-demand gas heater. The entire system would be filled with antifreeze. Does this sound reasonable to you? Thanks, Wayne Sheffield

Wayne, I don't have all the information about your project to give you specific quantitative advice, but I have some conceptual suggestions I think you will find useful.

If you plan to use gas in your house, you ought to use gas for your backup water heating. In general it is wise to use thermal sources of energy for thermal end uses, and use electric sources of energy for applications that must have electricity. I think you are on the right track with the on-demand water heater as backup. Unless you have a really large family with high peak hot water usage (greater than 6 gallons per minute with water saving devices), the on-demand gas water heater will be your most economical, energy efficient, and space efficient solution.

About the south-facing windows—the most frequent mistake made in passive solar design is too much glass. The result is high indoor temperature swings,

overheating on sunny autumn and winter days, and cold indoor temperatures at night and early morning.

The rule of thumb is to use south-facing glass equal to no more than 7 percent of the floor area of your house. That applies to low mass, stick-frame buildings. If you incorporate thermal mass in directly illuminated floors and walls of your house, you can increase that percentage to 12 percent of the floor area of the house. If you really want to go for the gusto (sounds like you do), use indirect passive solar heating, such as trombe walls or attached sunspaces, which deliver their solar heat later in the day and early evening rather than contributing to daytime overheating. If you use this approach, you can bump that passive solar collector area up to 20 percent of the floor area.

Slab heating is often incompatible with passive solar spaces that have a lot of glass. The slab has lots of thermal mass and maintains an even temperature. As soon as direct passive solar heating enters the same space, you have overheating because the slab cannot respond quickly enough to cool down. I would suggest that you use the slab heating in spaces that have little direct solar gain from windows. Use a quick response, backup heating system for the passive, direct gain heated spaces. You can combine a hydronic slab (low temperature) with hydronic baseboard heating (high temperature) in the same system by putting them on different zones.

I would advise against solar thermal panels in series. Heating a slab is a low temperature application. Five solar panels in series will produce unnecessarily high temperatures, and cause the panels to operate at a low efficiency. The high temperatures will also cause problems with overheating the glycol if you use an antifreeze system. Ken Olson • sol@solenergy.org

E-Meters and Batteries

Dear *Home Power*, I read your magazine regularly, and glean much information from the technical questions and answers when they are stated in everyday terms. My question is about amp-hour meters. I am using the Trace TM500 meter with 32 Trojan L-16 batteries. I have had some unfortunate mishaps where I have had to shut my system down for several days at a time. I need to get a benchmark of 0.00 on the meter, this being the point where the batteries are full.

What is the easiest way to get an E-meter or TM500 meter to match the state of charge in the battery bank? In the past, I have equalized for 4 to 6 hours, let the batteries sit for 24 hours, and then reset the meter to zero. Is this acceptable? Sincerely, Ken Steelman

Hello Ken, E-Meter is the product name of one of the two amp-hour meters manufactured by Xantrex. Xantrex also

manufactures the TM500 amp-hour meter you're using. The third amp-hour meter commonly used in residential RE systems is Bogart Engineering's TriMetric, which the design of the Xantrex TM500 meter is based on.

While periodic equalization of your flooded lead-acid batteries is important, equalization isn't necessary to synchronize your amp-hour meter with the battery bank's state of charge. Neither is waiting 24 hours (without charging or discharging) for the batteries to come to a chemical equilibrium.

All three amp-hour meters reset the amp-hour figure to zero each time the meter's fully charged parameters are met. These parameters are user programmable. In off-grid RE systems, the TM500 charged parameters are most commonly based on battery voltage and charge current. As the battery voltage rises, battery charge current decreases. But the TM500 also allows you to choose voltage and time, or voltage alone as the fully charged parameters. The TM500 manual explains this meter programming well.

So with the meter installed and functioning, the battery needs to be fully charged (the meter's charged parameters met) before the meter will display accurate amp-hour and state of charge percentage information. Batteries like to be fully charged. In an ideal world, your batteries would be getting fully charged (and the meter would be automatically resetting itself) on a daily basis. But in off-grid systems, achieving fully charged batteries several times a week is more realistic.

On the TM500, the sun indicator will flash when the fully charged parameters are met. Again, it's important to note that on all three amp-hour meters, the state of charge percentage and amp-hour figures will not be accurate until the fully charged parameters are met at least once. And achieving a fully charged battery at least once a week is necessary to keep the meter in sync with battery state of charge. Joe Schwartz
joe.schwartz@homepower.com

LED Night-Light

Dear Home Power, I enjoyed reading the article about converting a flashlight to LEDs in HP84. The article has given me an idea to build a much needed LED night-light for our mountain cabin. The cabin has existing 12 VDC circuits. We wanted to use one or two LEDs per night-light, and be able to power them directly from the 12 VDC circuit. The question I have is what size resistor would we need for each 5,600 mcd, 20 degree LED? Sincerely, Harry Deemyad, Fairfield, California

Hi Harry. LEDs are great for this application. I use several two-LED fixtures, both inside and out, to give me a "navigation" level of light at an energy cost of about a quarter of a watt per fixture.

There are a few things you need to know before you can calculate values for your resistors. I'll use figures for my favorite LED, the Nichia NSPW500BS (5,600 mcd, white). How many milliamperes (mA) will flow through the LEDs? The harder they're driven, the faster their luminous intensity will drop. I suggest 20 mA as a reasonable compromise between longevity and light output.

Next, it helps to know the junction voltage required at the current you want. I took ten of these LEDs, noted the voltage required to get 20, 30 and 40 mA rates. I then averaged the voltages, getting respective values of 3.41, 3.55, and 3.66 volts. If you add up the junction voltages (at the current you want) for the number of series LEDs in your circuit, subtract that from the supplied voltage, and divide the remainder by the ampere value you want (0.02 for 20 mA, 0.03 for 30 mA), you'll have the resistor value needed in ohms. (also, see Letters, page 128.)

Note that whether you have one, two, or three LEDs in series with a resistor, for a given voltage and current, each circuit uses exactly the same power—in this case, at 20 mA, about a quarter watt. It might be appropriate to get 50 percent more light from some of your fixtures by including a third LED in lieu of a bigger resistor (try a 123 ohm resistance with three LEDs, for about 20 mA in a 12 volt system).

Lately I've gone to using tiny LM317LZ adjustable regulators in my two-LED 12 V lights to precisely regulate the current, protect the LEDs, and give me full light output from 11 volts up. You can download a PDF of the application notes for this simple regulator, including sample circuits at: www.national.com/pf/LM/LM317L.html. Have fun. Don Kulha
don.kulha@homepower.com

Care and Feeding of Hydrocaps

Richard & gang, How about writing a little piece on the care and feeding of Hydrocaps? There were absolutely no instructions provided with the ones I bought! Some basic guidelines would be very useful. It seems like I once heard that it was necessary to bake them in the oven from time to time. Chuck P.S. We are coming up on our first megawatt-hour of homemade energy!

Hello Chuck, I've never heard of baking Hydrocaps. I have had the vents plug up sometimes. All that's required is to remove the cap and rap it sharply, and the stored water drains back into the cell. I can see no harm in baking the caps in a very low oven (less than 150°F). The only big no-no with Hydrocaps is equalizing with them in place. Richard Perez
richard.perez@homepower.com

Hi Chuck, We just did an installation with an SEI workshop using a single-point watering system. For about US\$15 a cap, you will never have to lift a battery

cap again. And the watering system can even be set up with a reservoir to automatically water the batteries. You can equalize with these caps in place, and you don't have to take them off to use a hydrometer (they have a flip top and a hydrometer hole). I think we'll see more and more battery banks using systems like these in the future. I know I want one on my battery bank... Congrats on the MWH! Where's the party? Ian Woofenden
ian.woofenden@homepower.com

PV Panel Placement Problems

Dear HP crew, Thanks for a very informative and helpful magazine. I have learned a lot from the various articles. Of course, they deal with the most ideal solar sites. Some of us are not so fortunate. When we built our cabin in northern New Hampshire about thirty years ago, we had no idea that we might have electricity at our remote site. Today, we are surrounded by very tall pines.

In the summer, our one Solarex panel performs quite well, but as the sun gets low on the horizon in the fall and winter, we have to use the genny more than I would like. I have purchased a second panel, and I am questioning where to place it. I have a morning site of several hours and an afternoon site of several hours. I have thought that I might place one panel at each of the two sites. However, it seems to me that somewhere I read that this is not a good idea.

On the other hand, a TV report on PV said that on a cloudy day, a solar panel would generate 80 percent of its full sun output. I would appreciate your comments on these two points. Also, it would be interesting if you could publish an article on a site or sites that are less than ideal, giving information on how they cope with the problem and the performance of the systems. Thanks. Looking forward to another great year with HP. Richard A. Kenyon, Foster, Rhode Island exmoorri@aol.com

Hi Richard, Good article idea! We welcome articles on OK, good, excellent, and amazing solar sites, and look forward to seeing one from you one of these days too. I know what you're talking about as far as the challenges of siting in the woods. There are 120+ foot Douglas-firs at the back of our clearing, and in the depth of winter, they block the sun all but a few hours of the day. I'm scheming to move our main PV array off our roof and onto a tall pole, which will gain us several hours of sun each day. I also recently installed two PV panels on one of our homebrew wind generator towers. At 115 feet, the solar window is pretty good... I expect to get at least half again as much energy as I would if I'd put these two panels on my roof.

In a situation with good all day sun, facing some panels southeast and some southwest does not make sense. The most intense sun is in the middle of the day, and facing an array due south is ideal. In your situation, with

one site having only good morning sun, and the other only good afternoon sun, splitting your array could work well. This assumes that the panels are in parallel, of course. But if I were you, I'd be looking for a tall pole, or even a spot in a sturdy tree to mount your PVs close to your battery bank, but up where the sun shines.

*The TV report you heard was optimistic about 80 percent PV output in cloudy weather. On a "cloudy bright" day, but not so bright as to cast shadows, Richard Perez gets about 50 percent power from his arrays. And on a heavily overcast day here in the Pacific Northwest, I just pray for wind. Ian Woofenden,
ian.woofenden@homepower.com*

Batteries and EDTA

Hello Richard, I just received the Solar 3, 4, 5, and 6 CDs, and love them. They are many times better than I had expected. I do have a question—in your lecture on batteries, you talk about a chemical called EDTA. I have a neighbor that did not maintain or add water to his batteries for eight months. I went over and added almost three gallons of water to the eight Trojan L-16s.

Of course, the batteries are having some problems, and are not keeping a charge. The neighbors only use this house one or two weekends a month, and the batteries are about two years old. Do you feel that adding EDTA to their batteries will be of any benefit? Or is it a hopeless cause, and they should just replace the batteries? By the way, I am maintaining their system now, so this problem won't occur again. Thank you very much for any info on this matter. Rich Mumm

Hello Rich, EDTA is for stripping large sulfate crystals from the cells' plates. If these batteries were run low on water, they have been radically overcharged. Sulfation of the plates is not the problem, but oxidization (from being exposed to air) is the most probable problem. EDTA will not help.

Here are some things that you can do:

- 1. Adjust the charge controller so that the battery is not being radically overcharged while the system is unused. In a 12 VDC system, back the charge controller down to about 14 VDC, and lower it even further if the cells still consume large amounts of water. Double this for a 24 VDC system.*
- 2. Equip the cells with Hydrocaps. This will prevent the cells from losing water, and increase the periods between watering.*
- 3. If the cells have been damaged by running them dry, there is little you can do but pray. Keep them wet, recharge them, and hope for the best. Richard Perez
richard.perez@homepower.com*

Send your questions for Q&A to letters@homepower.com





Home Power MicroAds



Rates: 15¢ per CHARACTER, include spaces & punctuation. \$20.00 minimum per insertion. All MicroAds are published in both the print and web versions. Please send check or Visa/MC data with ad. Please, no money orders. We do not bill MicroAds, they must be paid for in advance of publication. Your cancelled check or credit card bill is your receipt.

Help us prevent fraud! Home Power MicroAds from individuals must supply serial number(s) for equipment being sold. Businesses must supply published phone number(s) and physical address. While Home Power is doing everything we can to prevent fraud, we can assume no responsibility for items being sold.

VERY LOW PRICES Solar Electric & Thermal Equip. Panels-Inverters, Charge regulators, wind generators-pumps-controls Please Call (888) 817-1737 or write to 6 Cresta Cir. #8, San Rafael, CA 94903 www.afterhourssolar.com

*** HEY GUERRILLAS! *** We have OK4U grid-tie, sine-wave inverters plus accessories! Easy four-wire hookup! Add two 12V PV panels and join the revolution! These are new units with full manufacturer's warranty. Data interface for remote monitoring and control is also available. (IBM-PC & Win95/98 reqd.) OK4U-100(100 Watt) US\$240.00 OK4U-75(75 Watt) US\$175.00 DC-1(Data interface) US\$125.00 Summit Communications & Electronics Box 553, Willimantic, CT 06226 info@sumcom.net *** 860-456-3043 ***

WIND TURBINES! Best prices nationwide. Bergey- Aeromax-Turbex. www.pineridgeproducts.com 406-738-4284

BUDGET SOLAR, your first choice for solar electric products. Quality solar products, from educational kits, gadgets, and books to PV modules, inverters, and batteries, priced to fit every budget. Shop today at www.budgetsolar.com

HOW TO BUILD A SOLAR HOT WATER SYSTEM, Build your own collector, Book and Kit available at www.JC-SolarHomes.com

HYDROELECTRIC SYSTEMS: Pelton and Crossflow designs, either complete turbines or complete systems. Assistance in site evaluation and equipment selection. Sizes from 100 watts to 5 megawatts. Manufacturing home and commercial size turbines since 1976. Send for a free brochure. Canyon Industries Inc., P.O. Box 36 HP, Deming, WA 98244, 360-592-5552. e-mail: citurbine@aol.com web page: canyonindustriesinc.com

SOLAR HOME VIDEO TOUR - Learn how to live on 3KWH's a day without a major life style change. \$24.95 1-800-549-0391 www.chasepower.net

Resurrect old batteries with THE EQUALIZER. 435-867-8677 Don't use your car for those short trips. Use a Slipstream Electric Bicycle that you build yourself. WWW.econvergence.net/hp.htm

AUTO STANDBY Generators Propane or Natural gas 6 KW – 40 KW Xfer switch incl. Tel: 732.271.7704 Fax: 732.271.9990 www.focallighting.com 1830 Washington Valley Rd. Martinsville, NJ 08836

PROPERTY CARETAKERS/Housesitters enjoy rentfree living, worldwide 700+ opportunities available! The Caretakers Gazette (715) 426-5500. www.caretaker.org

WANTED: RURAL OFF-GRID HOME/PROPERTY TO RENT OR BUY. Must have excellent fresh water source, very clean air, any combination of wind/solar/hydro OK, prefer 40+ acres, will consider less. neelon@deepool.com or 410 752 7156

EARTH SHELTERED HOMES This definitive manual by noted authority Loren Impson features detailed building instructions for the amazingly affordable and practical Ferro Cement Domes. Only \$15 from Sun Life, 71 Holistic Mount Ida AR 71957 www.2BbyD.com

\$15,000 ASKED: Whole-house PV & heat sys. TR4000SW PP, HUP Solar One 24v, 10 Photowatt 75w, 2 Servels, & 8Kw CDI gen., all new. Also 5 used Revere H20 mod.s. & bldg mat'l's. 540-789-8252, 6 to 9:30 pm, S.W. VA.

BERGEY XL.1 Wind Turbine. New in the box. Available immediately. No Tower. \$1795. 3- ASE Americas 300 watt panels. 2 are 12 volt nominal, 1 is 36 volt nominal. \$1895/ea. All items FOB Montpelier, VT. Offers entertained. Installation, sales and design consulting available for PV, Wind, Micro-Hydro and Solar Hot Water systems. Over 10 years of experience. Contact Jim Grundy at , 1750 Clark Rd, E. Montpelier, VT, 05651. 802-476-3441.

\$200 Military Surplus Generators - 28 VDC, 50 Amp output is perfect for charging 24v inverter batteries. Gasoline engine is two cylinder, four stroke, air cooled. All units were reconditioned at the Army depot prior to being preserved for storage and come packed in the original container with all manuals and operating instructions. Call Energy outfitters at 800/467-6527 for complete details and a shipping quote.

XXXXXXXXXX USED SOLAR MODULES XXXXXXXXXXXX
XXXXXXXXXXXXXXXX 64 Watts \$319 XXXXXXXXXXXXXXXX
Used MSX60s \$295, BZ 8 amp pwm controller \$49, Ex 2KW inverter SB, 110 amp charger New \$850, 3000+ watt resistors \$35, new 75 Watt modules \$375. Buy, sell New/Used, Trace, NiCds. refrigerator. Try to match anyone's prices. Call or send S.A.S.E. to Craig Eversole, 10192 Choicena, Hesperia CA 92345 for free flyer. M/C VISA Discover 760-949-0505

SATELLITE TV - Large selection of items at reasonable prices. We specialize in Big Dish TVRO C & Ku Band equipment. Check us out at www.daveswebshop.com

FREE ENERGY Build a simple self contained—recycle water turbine, Info.-catalog \$3.00 Ganther Technologies N5408 Romadka Ave HP Granton, WI 54436-9010

Batteries last 10X longer with THE EQUALIZER. 435-867-8677

A BREAKTHRU in windturbine technology. Penturbine available in kit form. modular, expandable and self limiting. send \$3 for wind siting data and details to: f.m.hall, pobox 95, chimacum, WA. 98325

SURPLUS INDUSTRIAL BATTERIES: If ever batteries could be called beautiful, these are they. Powder coated steel cases, clear Lexan covers, stainless steel interconnect hardware, sealed V.R.L.A. technology, 20 year float rating. Super heavy duty. Unused, factory boxed, fully charged. Save 75%. 12-24 and 48 V sets. Up to 150 cells available in two sizes, 1200 amp hour or 1400 amp hour at 8 hour rate. Non-spillable, can be shipped by truck or picked up FOB Palmdale CA. Call or fax for complete specifications, prices, and availability. D.P.S.D. Inc. (661) 269-5410, fax (661) 269-1303.

BLUE MOUNTAINS-Eastern Oregon. Forested 80 Acres, solar powered. Self-contained. Year-round access. Newer house, huge shop, barn. Deer, elk, antelope, coyote, many birds. Thinned and Pruned 541-542-2323 Galen

Honda Generators - 1000 to 10,500 watts. Fast shipping and great prices! www.hayesequipment.com 1-800-375-7767

WINCHARGER PARTS (brushes, blades, etc) new and used for 12, 32, and 110 volt models. (716) 358-2534 New York. (406) 547-2266 Montana

I would like to sell the following back issues of Home Power Magazine as one lot price. I have #2 thru #15 with an extra #7, #17 thru #24, #26 thru #30, #32 thru #56, #58 thru #63, #66 & #67. All are in good condition. #2 thru #15 have been kept in a 3 ring binder. Will sell to the highest bidder thru March 15th. E mail or letter only. Mailing address Ron Webster 1936 Leisure World, Mesa, Arizona 85206 or E-Mail wrondorweb@aol.com.

VERMONT PV DEALER. David Palumbo/Independent Power & Light has been designing and installing PV systems for more than 12 years. Trace and Exceltech inverters. Siemens, BP, Kyocera and Solarex PV's. Harris Hydro. Surette, Rolls, and Dyno batteries. Honest dealer who offers personal support and service. "David is one of the original RE pioneers... he knows how to really squeeze all the energy out of a KWH!" Richard Perez (HP60). I P & L, 462 Solar Way Drive, Hyde Park, VT 05655. Phone 802-888-7194. Email: ipl@sover.net. Web site: www.independent-power.com. No catalog requests please. Please call for appointment before visiting.

NO. CALIF—Solar powered home for sale 1000+SQ FT, on 40 acres, adjacent to nat'l forest. Basement/garage. Good well. Quiet. Beautiful views, Trees. \$105,000 PH 530-459 1110 MSG. or sneetie58@aol.com

JACOBS WIND GENERATOR MOD25A 2500W 110vDC, double commutator, complete with jacobs control box & tower \$3200 OBO Scott @ 406-578-2596 or lohmuller@in-tch.com

POND AERATION WINDMILL: Koenders Air Compressor, 12 ft. Tower, 100 ft. Air Line, Aeration Stone: \$585. Electric Air Pump: \$375. Electric Aerator System \$465. Air Powered Water Pump \$180. Green Windmill info. Solar & Wind Powered Electric Products. We can ship worldwide. Malibu Water Resources — 800 470-4602 — www.MalibuWater.com

FOR SALE: 3 kW FM radio station with 20 acres; "A" frame house with studio powered by solar energy and a propane generator—\$250,000. For information, contact Ralph Case, c/o KAUL-FM, HCR 1, Box 92, Van Buren, MO 63965 or call 573-323-8595

12VDC Refrigerator Novakool kit with 10 cu. ft. home made box new kit is over \$600 I have no use for it, need good home only \$100 Corvallis OR call Briggs at (541) 757-2896

FOR SALE ON HAWAII. Natural Living Sanctuary. 5.5 acres adjacent spectacular state forest, ocean views. All solar-powered home, Guest House, Stainless Hot Tub, Organic Gardens, Orchard, Greenhouse. Clean Water. Friendly Renewable Energy Community. \$450,000 (808) 775-0092

DALE SANBORN REPAIR Rewind wind chargers, Jacobs—long and short case. generators and more. (605) 224-5634, 31090 SD Hwy 34, Pierre, SD 57501

SUNRISE SUBMERSIBLE SOLAR-POWERED 600 foot deep well pump (SR5218) Serial number B860. SC1B converter for 24 volt home battery connection. Brand new, never used, excellent condition. \$2070.00 list, 1500.00 obo. Split freight. Central Oregon, 541 420 0075

FOR SALE ROHEICO WIND GENERATOR with 25' 3 piece tower. New cost \$30,000. Never used, still in crate, \$5,000. Located in so. Calif. Call for details. DAYS: 626-442-2164

OFF GRID VIDEO TOUR - Learn how to reduce your utility bill 50 to 100% and still maintain your current life style. \$24.95 1-800-549-0391 www.chasepower.net

WE CAN HELP you put in a quality system. Solar 1 - St. Louis Solar 314 631 1094 www.solar1online.com
Bill_Loesch@compuserve.com

NEW SOLAR SYSTEMS 44, 150-watt modules, 96 cell Siemens single crystal, glass and EVA, 35.25" X 52" X 2" panelized and wired in series in sets of two. Each module 57 Voc, 46 Vpk 3.5 Isc, 3.2 lpk great for Sunny Boy, ST or 24 volt systems. \$450 ea. Min 8 modules. To big to UPS Sol Cal P/U preferred. Siemens Solar 48, Sp 70 watt modules four years old 20 year warranty, \$215 each min order sets of twelve. Trace 2524, \$500 Trace 4048 PV in SWODE cabinet with GFI board four years old \$1,800. Ominion 6kW inverter UL listed 6 years old. (805) 497-9808, 8-5PST or gj@solarelectricalsystems.com

I AM A SOLAR WHOLESALER looking for retailers to carry my solar electronic and hobby goods. Phone # (916) 486-4373. Please leave message.

www.sunprosolar.com lots of renewable energy products, information, interactive bulletin boards+more

TELLURIDE COLORADO: Off the Grid Properties! Hot Springs, Riverside, solar powered homes, large and small ranches. Find your own place in the sun with the only solar powered real estate office in Colorado. T.R.I. (970) 728-3205 1-800-571-6518

The Solar Cell Co. We carry solar cells for building your own panels at a much lower price than from a manufacturer. We carry satellite cells which are 23% efficient Vs 13% with standard cells. We custom build L.E.D. light strips (white or yellow). We carry 2 catalogs, 1 is a copy of our website (\$1.00) the other is a larger, more complete catalog with every solar product needed for complete off-grid living, as we have for 5 years (\$6.50). For both catalogs, \$7.00. Check out our very Low prices on our website @ www.solarcell.net or e-mail us @ highgfm@solarcell.net The solar cell co. P.O.Box 275, Lincoln, Me. 04457

Sun Frost RF16 12V refrigerator \$1,900. (can convert to 24V), Solarjack 4gpm 1/2 hp 24V well pump \$500., Dankoff Flowlight Booster pump 4.1-4.5gpm 12V \$350. Serious buyers only in AZ Call 928-339-4623.

Double usable solar power output with THE EQUALIZER 435-867-8677

CREATE ELECTRICITY by pedaling your bike at home! Build the Pedal-A-Watt yourself. www.econvergence.net/hp.htm

EDTA RESTORES SULFATED BATTERIES. EDTA tetra sodium salt, \$12/lb. plus \$5 S&H for 1st lb. plus \$1 S&H for each additional lb. Trailhead Supply, 325 E. 1165 N., Orem, UT 84057, (801) 225 3931, email: trailheadsupply@webtv.net, info. at: www.webspawner.com/users/edta.

The big-box Solar Mart may talk a good game from behind the order desk, but are they actually out there doin' it? VERMONT SOLAR ENGINEERING takes pride in being a reality-based dealer/designer/installer. We know the products because we work with them every day—PV, hydro, wind & domestic hot water, from components to complete systems. So reject the romantic salespeak offered by the volume dealers and give us a call. Thanks! 800-286-1252, 802-863-1202, 863-7908(fax). PO Box 697, Burlington, VT 05402. Our Website contains our installation portfolio and attractive sale pricing—www.vtsolar.com-Visa/MC PVs \$4 PER WATT PHOTOWATT, brand new in boxes of two, 105 watts ea. \$840 per box + shipping estatesale01@yahoo.com

Solar Workshop Vacation w/Richard Komp July 4-7 at Woodstock Museum \$350 Nontoxic pool/camping/food 845 246-0600 or wdstkms@ulster.net



Index to Advertisers

- AAA Solar Supply – 107
Aatec Publications – 124
Abraham Solar Equipment – 93
ABS Alaskan – 99
Abundant Renewable Energy – 97
Adopt a Library – 119
Advanced Composting Systems – 106
Advanced Energy Group – 33
Advanced Energy Inc – 69
Alternative Energy Store – 49
Amazon Power Co – 121
AstroPower – 43
Atlantic Solar – 61
B.Z. Products – 106
BackHome – 92
Backwoods Solar Electric Systems – 52
Bay Solar Power Design – 119
Bergey Windpower – 34
Biolet – 69
Bogart Engineering – 93
BP Solar – 2
Brand Electronics – 101
C. Crane Company – 107
CheapestSolar.com – 106, 114, & 119
Communities magazine – 106
Controlled Energy Corporation – 111
CubaSolar – 91
Dankoff Solar Products – 52
Davidge Controls – 99
Direct Power and Water Corp – 20
Dynamx – 107
Earth Solar – 98
Earthsense – 138
Electro Automotive – 107 & 118
Electron Connection – 56
Energy Conservation Services – 63
Energy Designs – 80
Energy Outfitters – 22, 50, & 125
Energy Systems & Design – 107
EPOWER – 115
Exeltech – 67
Get a Job! – 118
GotSolar.com – 32
Great Northern Solar – 115
Guerrilla Solar T-shirts – 83
H-Ion Solar Inc – 124
Harris Hydroelectric – 80
Hitney Solar Products – 92
Home Power Back Issues – 121
Home Power Biz Page – 81
Home Power CD-ROMs – 68
Home Power Sub Form – 80
Home Power T-shirts – 92
Horizon Industries – 115
Hydro Coil – 107
Hydrocap – 105
Hydrogen Appliances – 111
Independent Designs & Creations – 66
Innovative Energy Systems Inc – 115
Inverter Repair – 98
Inverter Service Center – 101
Jack Rabbit Energy Systems – 49
KTA Services Inc – 105
Kyocera Solar Inc – OBC
Matrix – 72
Meridian Energy Systems – 115
Morningstar – 91
MREA Workshops – 83
NeatSolarStuff.com – 101
New Electric Vehicles – 84
New England Solar Electric Inc – 97
New Frontier – 118
Newinli International Inc – 20
Northern Arizona Wind & Sun – 32 & 79
Northwest Energy Storage – 53
Obadiah's WoodStoves & Alternative Energy – 84
Offline – 114
Outback Power Systems – 62
Planetary Systems – 67
Pony Enterprises – 138
PowerPod Corporation – 97
Quick Start Reading Special – 119 & 138
Rae Storage Battery Company – 99
Ram Company – 101
Renewable Energy Videos – 92
RightHand Engineering – 111
Rolls Battery Engineering – 57
RV Power Products – 41
San Juan College – 111
Schott Applied Power Corporation – IBC
Siemens Solar Industries – 35
Simmons – 119
SMA America Inc – 4
Solar Depot – IFC
Solar Electric Inc – 60 & 119
Solar Energy International – 73
Solar Interior Design – 101
Solar Pathfinder – 84
Solar Village – 72
Solar Wind Works – 84
SolarHost.com – 84
SolarSense.com – 9
Solartech 3000 – 21
SolEnergy – 80
Solutions in Solar Electricity – 85
Southwest Solar – 115
Southwest Windpower – 23 & 42
Sun Frost – 62
Sun Spot Solar & Heating – 114
SunAmp Power Company – 40
SunEarth Inc – 62
Sunelco – 73
Sunweaver – 80
SunWize – 69
Surrette Battery Company Ltd – 51
Tour de Sol – 106
Tractel Inc – 83
Trojan – 63
U.S. Battery – 5
UniRac – 99
Vanner Power Systems – 51, 53, 57, & 61
Veggie Van – 98
Wattsun (Array Tech Inc) – 105
Windstream Power Systems – 106
Xantrex – 1
Zane International – 101
Zephyr Industries Inc – 99
Zomeworks – 67



Schott Applied Power Corporation

introduces it's newest products.




sapc 165

High Efficiency Multi-Crystal 165 Watt Photovoltaic Module

Schott's new multi-crystal module is perfect for grid-tie or off grid electrical systems. This module features Multi-Contact™ output cables, a twenty-year warranty and due to its large size is one of the most cost effective modules on the market today.

Advanced Energy MultiMode Power Conversion System

Available in both 5kW and 3kW output these energy appliances reduce electric utility bills during normal operation (grid-connect mode) and provides backup power when the utility grid fails (stand-alone mode).

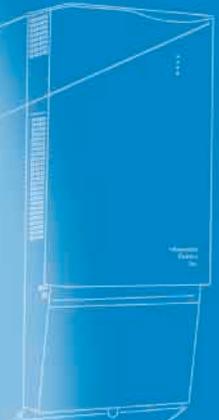

SMA-Sunny Boy Inverter

This high voltage grid-tie inverter is fast becoming one of the most popular grid-tie inverters in the USA. Using the modular approach, these inverters are being used in systems as large as one Megawatt. Monitoring equipment is also available to monitor as many as 50 inverters at one time.



For information Call
800 777-6609 or 800 344-2003
4051 Alvis Court • Rocklin, CA 95677

SCHOTT
glass made of ideas

25 YEAR WARRANTY

KYOCERA

PRODUCT SHOWCASE

KC70

KC60

KC45

KC50

KC40

KC35

Kyocera's advanced cell processing technology and automated production facilities have produced a highly efficient multicrystal photovoltaic module.

The conversion efficiency of the Kyocera solar cell is 14%.

These cells are encapsulated between a tempered glass cover and an EVA pottant with PVF back sheet to provide maximum protection from the severest environmental conditions.

The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation.

KYOCERA SOLAR, INC.
7812 East Acoma Drive
Scottsdale, Arizona 85260 USA
T: 480.951.6330 • 800.544.6466
F: 480.951.6329 • 800.523.2329
www.kyocerasolar.com
info@kyocerasolar.com



KYOCERA CORPORATION
KYOCERA SOLAR, INC.



Home Power Subscription

\$22.50 per year (6 issues) to U.S. Zip Codes via 2nd Class U.S. Mail
 \$43.00 per year (6 issues) to U.S. Zip Codes via 1st Class U.S. Mail
 \$30.00 (US\$ drawn on U.S. Bank) International Surface Mail, see pg. 81 for Air Rates
Home Power magazine, PO Box 520, Ashland, OR 97520
Subscribe online at: www.homepower.com
Subscriptions: 800-707-6585 (inside USA) or 541-512-0201 or Fax 541-512-0343

To subscribe, please fill out the sub form below, enclose payment as a check, money order, or Visa/MasterCard information, and mail this form. Tape the form well or use an envelope so your check won't fall out. Please allow up to ten weeks for the start of your 2nd class sub. For **International Subscriptions or Back Issues of Home Power**, please see **page 81**.

- New 2nd Class Sub-\$22.50 to USA Zip Codes New 1st Class Sub-\$43 to USA Zip Codes Sub Renewal Specify 1st or 2nd Class Change of Address (include old address)
- Gift Subscription
 From (your name and address here) _____

DO YOU WANT US TO SEND YOU A SUBSCRIPTION RENEWAL NOTICE?

The number of the last issue in your subscription is printed on your mailing label.

- Yes, remind me by mail when my subscription runs out. No, I'll check my mailing label so we can save energy & paper.

PLEASE CLEARLY PRINT THE COMPLETE NAME AND ADDRESS FOR THIS SUBSCRIPTION:

NAME _____

STREET _____

CITY _____ STATE _____ ZIP _____

PHONE _____ EMAIL _____

-  **Credit Card Orders:** please check the type of card you have and fill in the information below.
 Signature (as shown on card) _____ Exp. Date _____
-  Credit Card Number _____ Amount \$ _____

The following information about your renewable energy usage helps us produce a magazine to better serve your interests. This information will be held confidential. We do not sell our mailing list. Completion of the rest of this form is not necessary to receive a subscription, but we would greatly appreciate your input.

NOW: I use renewable energy for (check ones that best describe your situation)

- All electricity
- Most electricity
- Some electricity
- Backup electricity
- Recreational electricity (RVs, boats, camping)
- Vacation or second home electricity
- Transportation power (electric vehicles)
- Water heating
- Space heating
- Business electricity

In The FUTURE: I plan to use renewable energy for (check ones that best describe your situation)

- All electricity
- Most electricity
- Some electricity
- Backup electricity
- Recreational electricity (RVs, boats, camping)
- Vacation or second home electricity
- Transportation power (electric vehicles)
- Water heating
- Space heating
- Business electricity

RESOURCES: My site(s) have the following renewable energy resources (check all that apply)

- Solar power
- Wind power
- Hydro power
- Biomass
- Geothermal power
- Tidal power
- Other renewable energy resource (explain)

The GRID: (check all that apply)

- I have the utility grid at my location.
 I pay _____¢ for grid electricity (cents per kilowatt-hour).
 _____% of my total electricity is purchased from the grid.
- I sell my excess electricity to the grid.
 The grid pays me _____¢ for electricity (cents per kilowatt-hour).

(continued on reverse)

I now use, or plan to use in the future, the following renewable energy equipment (check all that apply):

NOW	FUTURE		NOW	FUTURE	
<input type="checkbox"/>	<input type="checkbox"/>	Photovoltaic modules	<input type="checkbox"/>	<input type="checkbox"/>	Methane digester
<input type="checkbox"/>	<input type="checkbox"/>	Wind generator	<input type="checkbox"/>	<input type="checkbox"/>	Thermoelectric generator
<input type="checkbox"/>	<input type="checkbox"/>	Hydroelectric generator	<input type="checkbox"/>	<input type="checkbox"/>	Solar oven or cooker
<input type="checkbox"/>	<input type="checkbox"/>	Battery charger	<input type="checkbox"/>	<input type="checkbox"/>	Solar water heater
<input type="checkbox"/>	<input type="checkbox"/>	Instrumentation	<input type="checkbox"/>	<input type="checkbox"/>	Wood-fired water heater
<input type="checkbox"/>	<input type="checkbox"/>	Batteries	<input type="checkbox"/>	<input type="checkbox"/>	Solar space heating system
<input type="checkbox"/>	<input type="checkbox"/>	Inverter	<input type="checkbox"/>	<input type="checkbox"/>	Hydrogen cells (electrolyzers)
<input type="checkbox"/>	<input type="checkbox"/>	Controls	<input type="checkbox"/>	<input type="checkbox"/>	Fuel cells
<input type="checkbox"/>	<input type="checkbox"/>	PV tracker	<input type="checkbox"/>	<input type="checkbox"/>	RE-powered water pump
<input type="checkbox"/>	<input type="checkbox"/>	Engine/generator	<input type="checkbox"/>	<input type="checkbox"/>	Electric vehicle

← FOLD HERE AND TAPE EDGES →

Please write to us here. Tell us what you like and don't like about Home Power. Tell us what you would like to read about in future issues. Thanks for your attention and support.

Check here if it is OK to print your comments as a letter to Home Power.

← FOLD HERE AND TAPE EDGES →

Return Address

PLACE FIRST CLASS POSTAGE HERE
--

**Home Power magazine
Post Office Box 520
Ashland, OR 97520**