



HOME POWER

THE HANDS-ON JOURNAL OF HOME-MADE POWER


ISSUE #72

August / September 1999

\$4.75 U.S.

\$7.00 CAN.

Display until October 1

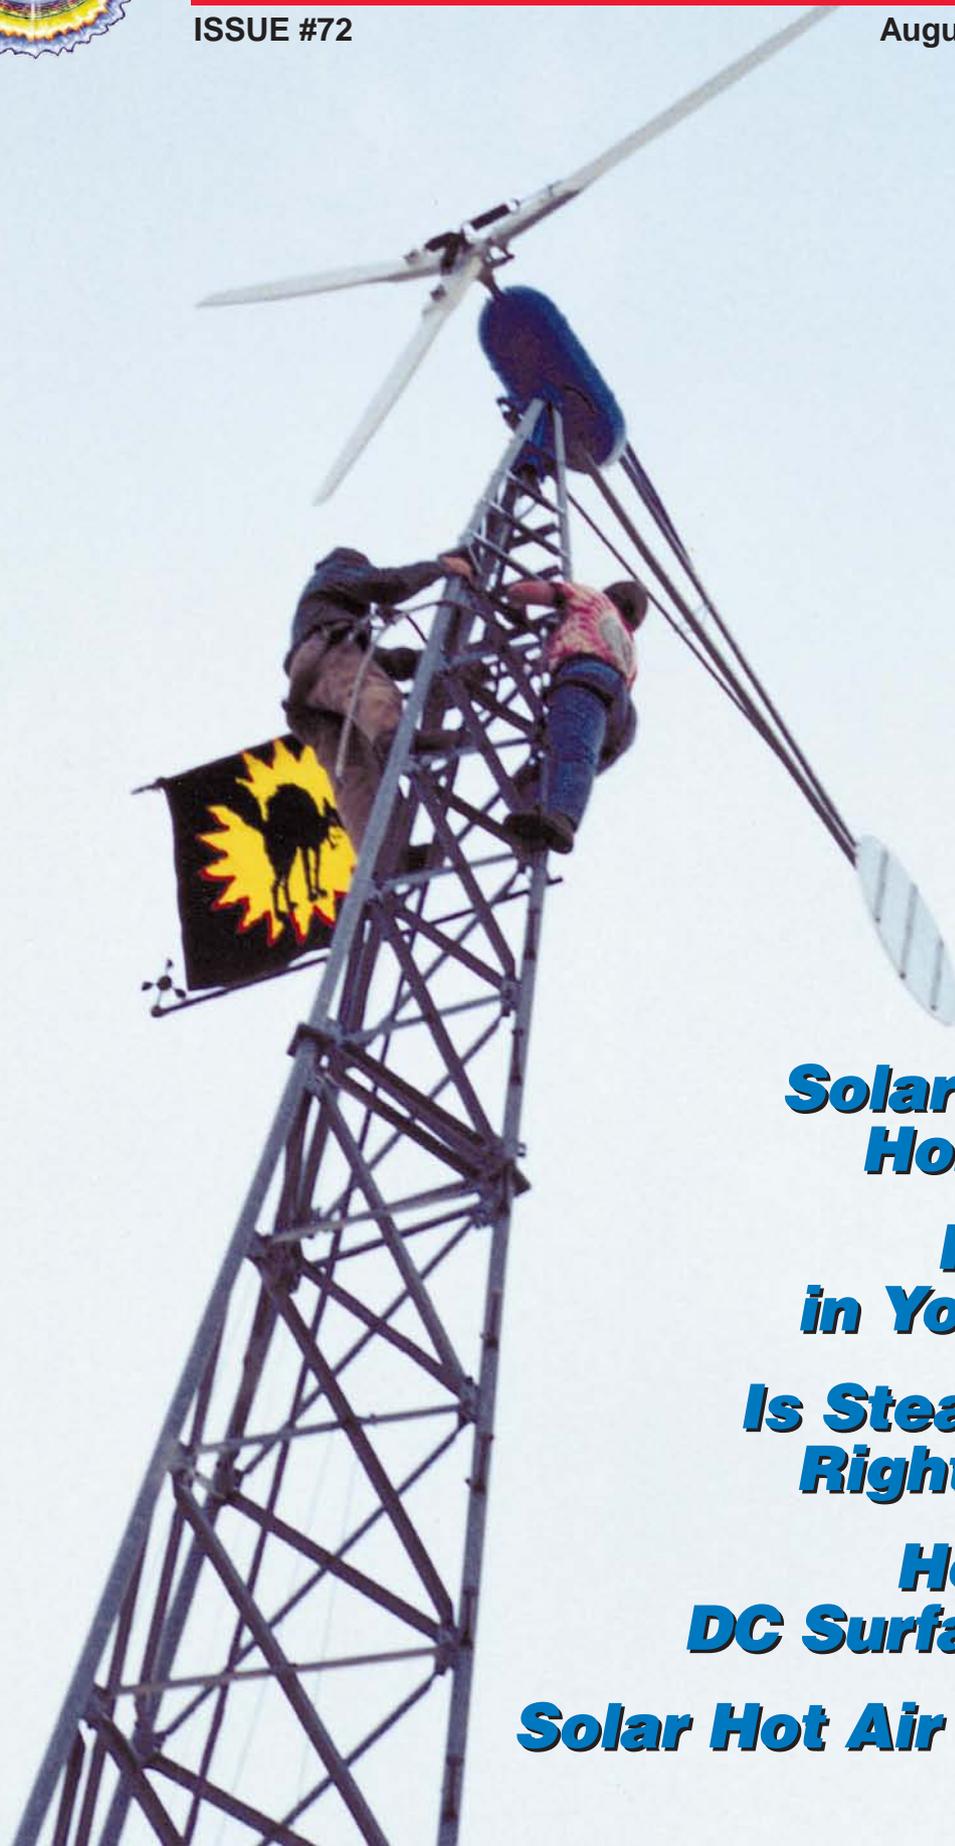

**Solar-Powered
Home & Car**

**Fuel Cells
in Your Future**

**Is Steam Power
Right for You?**

**Home-Built
DC Surface Pump**

Solar Hot Air Collector


Y2K

How much time do you have left?

Don't live in the dark ages...



Take the guess work out of your backup battery system with LINK instrumentation & Freedom 458 Inverter/charger...

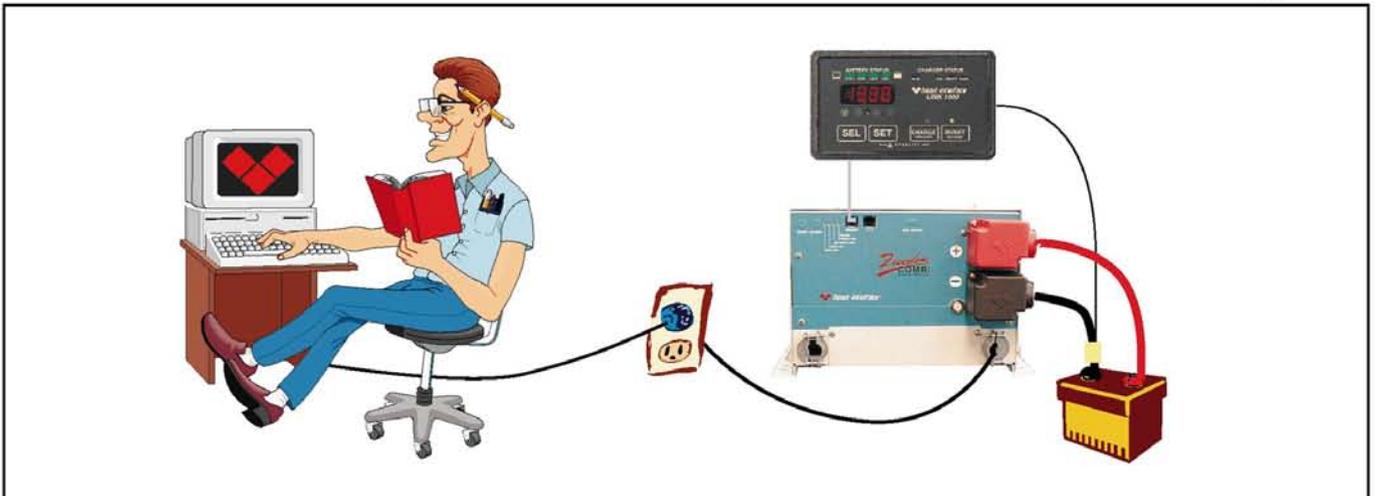

Knowledgeable Customer Service

Call 1-800-446-6180. Email: techhelp@heartinterface.com

Simple Operation

Easy to install. Easy to program. Easy to use.

Integrated Instrumentation

Engineered systems. Designed to work together.

Your time is running out, call Heart Interface today!

 **heart interface** Heart Interface Corporation · 21440 68th Ave S · Kent, WA 98032
Tel 1-800-446-6180 · Fax 253-872-3412 · www.heartinterface.com



BP SOLAR

We've discovered new planets in our solar system.

BP Solar: we're an advanced solar energy company. We manufacture premium solar modules and we're on the leading edge with new, low cost technologies. But we do much more...

We provide Engineered Power Solutions (EPS) to enhance your quality of life and we have joined with industry leaders to bring you the best line of renewable energy products in the universe. All backed by a name that is known and trusted throughout the world.

We've done it again.

Business opportunities now available - join our force!



USA:

American Energy Technologies, Ltd. - Florida

Toll Free: 800-874-2190
Phone: 904-284-0552
E-Mail: Solardell@aol.com

Dankoff Solar Products - New Mexico

Toll Free: 888-396-6611
Phone: 505-473-3800
E-mail: pumps@danksolar.com

Alternative Energy Engineering - California

Toll Free: 800-777-6609
Phone: 707-923-2277
E-mail: Energy@alt-energy.com
Internet: <http://www.alt-energy.com>

Effective Solar Products - Louisiana

Toll Free: 888-824-0090
Phone: 504-537-0090
E-mail: esp@effectivesolar.com
Internet: <http://www.effectivesolar.com>

Alternative Solar Products - California

Toll Free: 800-229-7652
Phone: 909-308-2366
E-mail: mark@alternativesolar.com
Internet: <http://www.alternativesolar.com>

Intermountain Solar Technologies - Utah

Toll Free: 800-671-0169
Phone: 801-501-9353
E-mail: utahsolar@aol.com
Internet: <http://www.intermountainsolar.com>





BP SOLAR



Talmage Solar Engineering - Maine
 Toll Free: 888-967-5945
 Phone: 207-967-5945
 E-mail: tse@talmagesolar.com
 Internet: <http://www.talmagesolar.com>

CANADA:
Powersource Energy Systems -
British Columbia
 Toll Free: 888-544-2115
 Phone: 250-544-2115
 E-mail: powersource@vuv.com

Powersource Energy Systems -
Alberta
 Toll Free: 888-544-2115
 Phone: 403-291-9039
 E-mail: powersource@vuv.com

Solar Solutions - Manitoba
 Toll Free: 800-285-7652
 Phone: 204-632-5554
 E-mail: solar@solarsolutions.ca
 Internet: <http://www.solarsolutions.ca>



Everything Under The Sun, Now The Choice Is Yours



GET ALL THE ADVANTAGES YOU NEED FROM ONE SOURCE!

Alternative Energy Engineering (AEE), Applied Power, Solar Electric Specialties (SES), and Ascension Technology (AT) have joined together to build the finest dealer support program anywhere. Get these advantages and more:

- Greatest solar module, component, and system choices.
- Most extensive product catalog. Use ours or make it yours!
- Largest variety of proprietary prepackaged systems.
- Standardized backup power systems for Y2K and Emergency Preparedness.
- Complete proprietary UL Listed systems and products.
- Large experienced sales engineering tech support staff.
- Most diverse support services available including Experienced Technical Staff, Design, Production, Sales, Installation, Training, and Marketing support
- Huge In-stock Inventory.
- Competitive pricing. Monthly specials!



Applied Power
Readypower™ Backup
Power System



Ascension
Sunline AC Module



SES MAPPS UL Listed
Prepackaged Systems



AEE Powerplus
Plug-n-Play Power System

Alternative Energy Engineering

a division of Applied Power Corporation

Solar, Wind, & Hydroelectric Power Systems

CALL FOR OUR FREE CATALOG: 800-777-6609



plug into

POWER



FROM THE SUN, WIND & WATER

We're Your Resource for Home Power Equipment.



Call us for ONE STOP SHOPPING from our HUGE IN-STOCK INVENTORY. We're the #1 TRACE DISTRIBUTOR in the US with over 20 YEARS IN THE BUSINESS of serving you with GREAT CUSTOMER SERVICE. Our FREE TECHLINE is staffed by MECHANICAL and ELECTRICAL ENGINEERS. **CALL FOR OUR CATALOG: 1-800-777-6609.**

**Dealer
Inquiries
Welcome.**



**Alternative Energy
Engineering**

Solar, Wind & Hydroelectric Power Systems



HOME POWER

THE HANDS-ON JOURNAL OF HOME-MADE POWER

Issue #72

August / September 1999

Features



- 10 Solar Renaissance**
Norman and Janet Pease walk their talk—from their 12 KW grid-intertied PV system to the solar-powered Honda EV Plus, they live and move by solar power.



- 20 Home Hydrogen?**
Russ Barlow couldn't wait for an official release of a consumer fuel cell, so he went on a quest to find out the truth about the future of this much-hyped technology.



- 42 Education on Wheels**
Scott Ely can't help but spread the word. His Education Station is built to display and describe the whole spectrum of renewables to tomorrow's converts.



- 50 MREF: The Party Continues**
We just can't stay away. This year's Midwest Renewable Energy Fair was the best yet. And at 10 years old, it's a perfect role model for a whole family of younger siblings.



- 60 A Steamy Subject**
Is steam power for you? Do you have the necessary fuel? Do you have the necessary use for the waste heat? Do you have the necessary muscles? Skip Goebel lays it all out.

More Features

- 68 Under Control**
Windy Dankoff takes a beginner's look at charge controllers—one of the most important components in any renewable energy system.

GoPower

- 84 Recipe for Power**
Josh and Kaia Tickell give us the step-by-step for making biodiesel. Snub the oil industry with a side of fries.

- 92 Acid Test**
What is best for your EV application? Traction batteries explained and compared.

- 100 Adaptation**
The minutiae of creating a functional motor-to-transmission adaptor plate.

Homebrew

- 34 A Lot of Hot Air**
Ralph Seip retrofitted a simple solar hot air collector for his Michigan home. His data is a great base from which to extrapolate (formulae included).

- 54 Surface Pump Project**
Al Latham homebrews a simple surface pump from off-the-shelf parts. You can too.

Cover: Solar Guerrillas climb the 80 foot wind tower at the Midwest Renewable Energy Fair to fly their colors.

Things that Work!

- 74 Portable Power**
National Solar Technologies, Inc. has earned The Thumb for their EN-R-PAK 200 portable PV system. It works!

Guerrilla Solar

- 77 The Manifesto**
Drafted and signed on July 4th, 1999, this is the official statement of purpose from those who choose "right" over "allowed."

Media Review

- 126 Green Building on ROM**
Environmental Building News releases the E Build Library CD-ROM, much to the liking of Joe Schwartz.

Columns

- 98 Word Power**
Watt-hour, a unit of energy, is defined.
- 104 Power Politics**
Truths, damn truths, and public opinion polls—will the government listen?
- 108 IPP**
Generation? Distribution? Co-generation? Distributed generation? Who can? Who does? Who profits?

More Columns

- 112 Code Corner**
John Wiles gets grounded. You should too.
- 118 Wrench Realities**
Shunts, dummies, and diversions—Bob-O gives us the techniques we need to deal with our surplus.
- 123 Hive & Heart**
Kathleen is no longer the only queen on Camp Creek. Hover around the hive and find out the buzz.
- 130 The Wizard**
Where's it all going? Resource depletion, its causes and effects.
- 138 Ozonal Notes**
Retirement, Oregon net metering crippled, ASES, MREF '99, and Guerrillas.

Regulars

- 8 From Us to You**
- 80 HP's Subscription Form**
- 81 Home Power's Biz Page**
- 127 Happenings—RE Events**
- 131 Letters to Home Power**
- 140 Q&A**
- 142 MicroAds**
- 144 Index to Advertisers**

Access and Info

Access Data

Home Power
PO Box 520
Ashland, OR 97520 USA

Editorial and Advertising:
Phone: 530-475-3179
Fax: 530-475-0836

Subscriptions and Back Issues:
800-707-6585 VISA / MC
541-512-0201 Outside USA

Internet Email:
hp@homepower.com

World Wide Web:
www.homepower.com

Paper and Ink Data

Cover paper is 50% recycled (10% postconsumer / 40% preconsumer) Recovery Gloss from S.D. Warren Paper Company.

Interior paper is 50% recycled (50% postconsumer) RePrint Web, 60# elemental chlorine free, from Stora Dalum, Odense, Denmark.

Printed using low VOC vegetable based inks.

Printed by

St. Croix Press, Inc.,
New Richmond, Wisconsin

Legal

Home Power (ISSN 1050-2416) is published bi-monthly for \$22.50 per year at PO Box 520, Ashland, OR 97520. International surface subscription for \$30 U.S. periodicals postage paid at Ashland, OR, and at additional mailing offices. POSTMASTER send address corrections to Home Power, PO Box 520, Ashland, OR 97520.

Copyright ©1999 Home Power, Inc.

All rights reserved. Contents may not be reprinted or otherwise reproduced without written permission.

While *Home Power* magazine strives for clarity and accuracy, we assume no responsibility or liability for the use of this information.



Recycled Paper



Recyclable Paper

At 3 PM on 17 June 1999, Bill Haveland was killed in a motor vehicle accident in Neilsville, Wisconsin. He was on his way to the Midwest Renewable Energy Fair to demonstrate a wind machine he had recently designed before installing it at his new home in Cook County, Minnesota.

Bill had an incredibly adventurous life. He was born in St. Paul, Minnesota, July 19, 1950. After high school graduation, he worked and roamed all over the world. He lived and worked in Prudhoe Bay, Alaska, and cycled through Nepal, New Zealand, and many places in between. He lived for quite a few years in Costa Rica, working with renewable energy development, design, and installation. Bill recently moved to Cook County to start a new life close to his family. He recently published an article in Home Power, entitled Induction Motors for Small-Scale Hydro.

Bill had a passion for the environment. In his travels he saw how people have damaged the Earth. His simple life, financial support, hands-on involvement in organizations like Greenpeace, gentle diet, and intimate knowledge of the ways of walking through jungles and forests touched all who knew him. We will miss his energetic approach to life.

We particularly respect Bill's persistence in making things technically correct. That's not easy in a new field where images and wishful thinking often dominate decision making, and where Murphy's Law sometimes dominates Ohm's Law.

Bill's activism included working for the past six months to gain support from Minnesota state agencies to revisit outdated net metering and interconnection rules in order to help the smallest of renewable developers connect their systems economically and sensibly to the grid. It was an unfinished challenge, among many.

We've lost one of the "renewable energy brethren" who also worked for environmental and social justice in Central America. Living to make the world better can mean sacrifice, however, and we know that during his years in Costa Rica he was frustrated by the difficulty of making a living. This struggle is shared by many working in renewable energy and in the developing world. Bill carried the burdens of both.

And we're newly aware of the need to express our appreciation and love for all those dedicated, unique characters in our field and the contributions they make. We wonder just what Bill and St. Peter said to each other at those pearly gates...

It is sad that Bill often felt that the world didn't appreciate his efforts and now he is suddenly gone. Or is he? Let us remember him with the phrase Central Americans use to honor their dead and hold them present in their hearts: "Bill Haveland, presente."



Joy Anderson
Russ Barlow
Mike Brown
Sam Coleman
Windy Dankoff
Scott Ely
Skip Goebel
Anita Jarmann
Kathleen Jarschke-Schultze
Stan Krute
Don Kulha
Al Latham
Don Loweburg
Burke O'Neal
Karen Perez
Richard Perez
Gaia Perinchief-Carney
Shari Prange
Benjamin Root
Bob-O Schultze
Joe Schwartz
Ralph Seip
Joshua Tickell
Kaia Tickell
Michael Welch
Jack West
John Wiles
Dave Wilmeth
Myna Wilson
Ian Woofenden

"Think about it..."

**"We Gotta
TAKE
the Power Back"**

—Zack de la Rocha
Rage Against The Machine

Power Now



 **SolarSense.com**
1-877-79-SOLAR

Solar Power Renaissance in California

A 12 Kilowatt Grid-Tie PV System

Burke O'Neal, with Jack West

©1999 Light Energy Systems



Norman and Janet Pease's 12,000 watt grid-intertied PV system powers home and car.

My best friend and I designed our first solar electric system six years ago while we were both in college at the University of Wisconsin, Madison. It was a modest 275 watt stand-alone photovoltaic (PV) system, with a bicycle-powered backup generator (see *PV in the City, HP37*). PV was practically unknown in utility-serviced cities. At that time, a utility representative told a local newspaper that PV systems were too costly and inconvenient to ever catch on for utility-connected homes.

A year ago, I moved to California and took a job with Light Energy Systems (LES). This solar contractor has over 19 years of experience in the San Francisco Bay

Area and has installed hundreds of systems totalling more than 120 kilowatts. That utility representative was wrong! Utility-tied customers *are* buying PV systems.

PV Comes to the City

PV energy systems have come a long way since my college days. The "backwoods" testing grounds have proven them to be extremely reliable. Technological advances and increased demand have lowered the cost of PV panels and the supporting electronic equipment. Inverters operate seamlessly with the utility grid, with no inconvenience.

The interest level in solar energy is the highest it has been since the solar tax breaks in the late 1970s and early '80s. Net metering laws and government incentives such as the buydown program in California may signal the renaissance of residential solar power. This article will walk you through the entire grid-tie process—initial site visit to final commissioning—on a 12 KW residential PV system in Orinda, California.

Legislative Support

California Senate Bill 656, known as the Net Metering

Law, allows California residents to sell electricity back to the grid from residential PV systems, wind systems, solar thermal-electric systems, and fuel cells. All the publicly owned transmission utilities—Pacific Gas and Electric, San Diego Gas and Electric, and Southern California Edison—are required to pay full retail price for this home-generated power up to the net zero meter reading on a yearly basis. Some other transmission utilities are participating as well, so it's worth contacting your local utility if you are interested in net metering. If home-generated power exceeds what the residents use in their house in a year, it is donated to the utility. The requirement for a utility to accept home-generated electricity ends when generating capacity equals

0.1 percent of a utility's peak electricity demand. In the case of Pacific Gas and Electric (PG&E), this is 17 megawatts, or approximately 5,000 residential-sized systems.

The California buydown program, Senate Bill 90, outlines distribution of the US\$540 million Renewable Resource Fund. Funded by the electric utility ratepayers in California, this program is designed to support existing, new, and emerging renewable electricity generation technologies. US\$32.4 million of this money has been set aside to provide rebates for residential and small commercial renewable energy systems (10 KW or less; PV, wind, and fuel cell). The rebates are structured into five buydown blocks, starting at \$3 per watt of installed PV and scaling down to \$1 per watt as the money is distributed.

After the rebate is reserved, the contractor or homeowner has nine months to install the system. As of May 15, 1999, 285 rebate reservations have been made for residential PV systems. These constitute about 25 percent of the US\$3 per watt rebates. About 80 systems have actually been built (18 of which were completed by LES). To be eligible for the rebate, PV systems must be installed by a licensed solar or electrical contractor, a licensed engineering firm, or by the homeowner. PV systems must carry a five year warranty on all the parts and labor if not installed by the homeowner.

The Pease Residential PV System

Norman and Janet Pease's PV system was designed



Janet "fills" the Honda EV Plus. Daily driving consumes about 450 KWH of solar energy each month—less than one quarter of the PV's summertime output.

by Jack West, a senior PV systems engineer at Light Energy Systems. It includes an impressive 12 KW array in a straight grid-connected arrangement with no battery backup. Their system uses a single meter (nothing special here—just a standard analog watt-hour meter like most homes have) to measure the difference between the electricity supplied by the utility and the electricity generated by their PV system. Imagine the gratification of seeing the utility meter spin backwards on a sunny day!

Norman and Janet have been interested in renewable energy and electric cars since the energy crisis of the 1970s. They lived on a ranch in the early '70s, about six miles (9.7 km) from the utility grid. PG&E would have charged them about US\$80,000 to run a line to the ranch house. Instead, they spent a fraction of that money on a wind turbine, battery storage, and a gasoline generator for backup. They didn't purchase an electric car then because Norman didn't think the technology provided enough reliability or range. When he saw the Honda EV Plus with its 80 mile (129 km) range, he found an electric vehicle that he could feel good about. He uses it every day and it has proven to be very reliable.

Their new 3,500 square foot (325 m²) house in the Bay Area sports a Sun Frost refrigerator, extensive compact fluorescent lighting, and even an 18 watt solar fountain. Environmental concerns motivated Norman and Janet to invest in a PV system. Norman says, "We were talking with our neighbor about our electric car when he said to us, 'Even without gas, you are still burning coal



Two Trace 5548 sine wave inverters push energy back at PG&E. Enclosure covers sit on the floor.

to charge that car.' That inspired me to look into a more environmentally sound way to produce that electricity."

Initial Site Visit

We began our site visit by giving Norman a quick overview of the different types of PV equipment and configurations available. Then we discussed their loads and the capabilities of residential-sized PV systems. As might be expected for a large suburban home in the Bay area, the average load was in excess of 100 KWH per day. Next, we looked over the site for possible PV locations. After seeing his glorious, unshaded, southwest-facing 65 by 12.5 foot (20 x 3.8 m) roof with an adjoining 30 by 12.5 foot (9 x 3.8 m) roof, PV module location was obvious.

With the PV array location decided, we took all the necessary measurements (roof type, rafter spacing, sheathing material, etc.) to design a PV system that would supply as much of the electrical load as possible. We ran a complete shading analysis using a Solar Pathfinder. And we also took a close look at the service entrance to determine if there was space for a backfed breaker or if we would have to do a line-side connection (as permitted in *NEC* section 690-64).

With all of Norman's questions answered and all the information we needed, we went back to the shop to draw up some different design options and pricing.

Reserving the California Rebate

Once we arrived at an agreement with Norman on the exact design and price of the system, we put together a contract and got to work immediately on reserving the free money! As with most of these systems, the Peases' rebate of US\$3 per watt was easily reserved. We sent the California Energy Commission (CEC) a completed, one page Reservation Request Form with a signed purchase order, along with a copy of Janet and Norman's monthly utility statement.

In an effort to prevent public misconception about PV capability, the CEC decided to base the rebate on the AC rating of the system. This is calculated by multiplying the module's PTC (PVUSA Test Conditions) rating by the PVUSA approved peak efficiency of the inverter. PVUSA (Photovoltaic Utility Systems Applications) is an independent PV testing, development and educational organization funded primarily by electric utilities. The PTC rating is based on more realistic field conditions than the STC (Standard Test Conditions) rating that manufacturers typically use for their PV modules.

For the Pease residence, the 269 watt PTC rating of the modules times the 96 percent inverter efficiency gives a 10.3 KW AC rating. When multiplied by the US\$3 per watt rebate amount, this yields a hefty US\$31,000 rebate on their system. The total system cost, including components, tax, permits, design, and installation, was US\$71,543 after the rebate.

City and Utility Permits

Before construction of Norman and Janet's PV system could begin, we had to get the required permits from the City of Orinda. In this case, they only required an electrical permit. Since PV panels add very little weight to the roof, many building departments waive the structural permit. For this system, the electrical permit fee was US\$84.38. We sent the building department several electrical schematics and a schematic showing our mounting strategy.

In order to get approval from PG&E to begin the project, the owners had to sign a Net Energy Metering and Energy Purchase Agreement (NEMA). This included a requirement for adequate insurance coverage "as specified in chapter 18 of the NEMA." As in most cases, the Peases' existing homeowner's insurance was adequate.


PV Panels

After we looked at how several different PV modules laid out on the roof, the ASE 300-DG/50 modules were clearly the best choice. The price was competitive, the large module area significantly reduced installation costs, and two rows of modules fit perfectly on the roof

Norman & Janet Pease's 12,000 Watt Grid-Tied PV System

Forty ASE 300-DG/50 photovoltaic modules
8.3 amps each at 36 volts DC
producing 12,000 watts total
(only one subarray and combiner box shown)

Note: Grounds not shown. All PV modules are grounded via #8 bare copper to conduit on the roof. Conduit terminations are tied to the system grounding conductor at the service entrance.

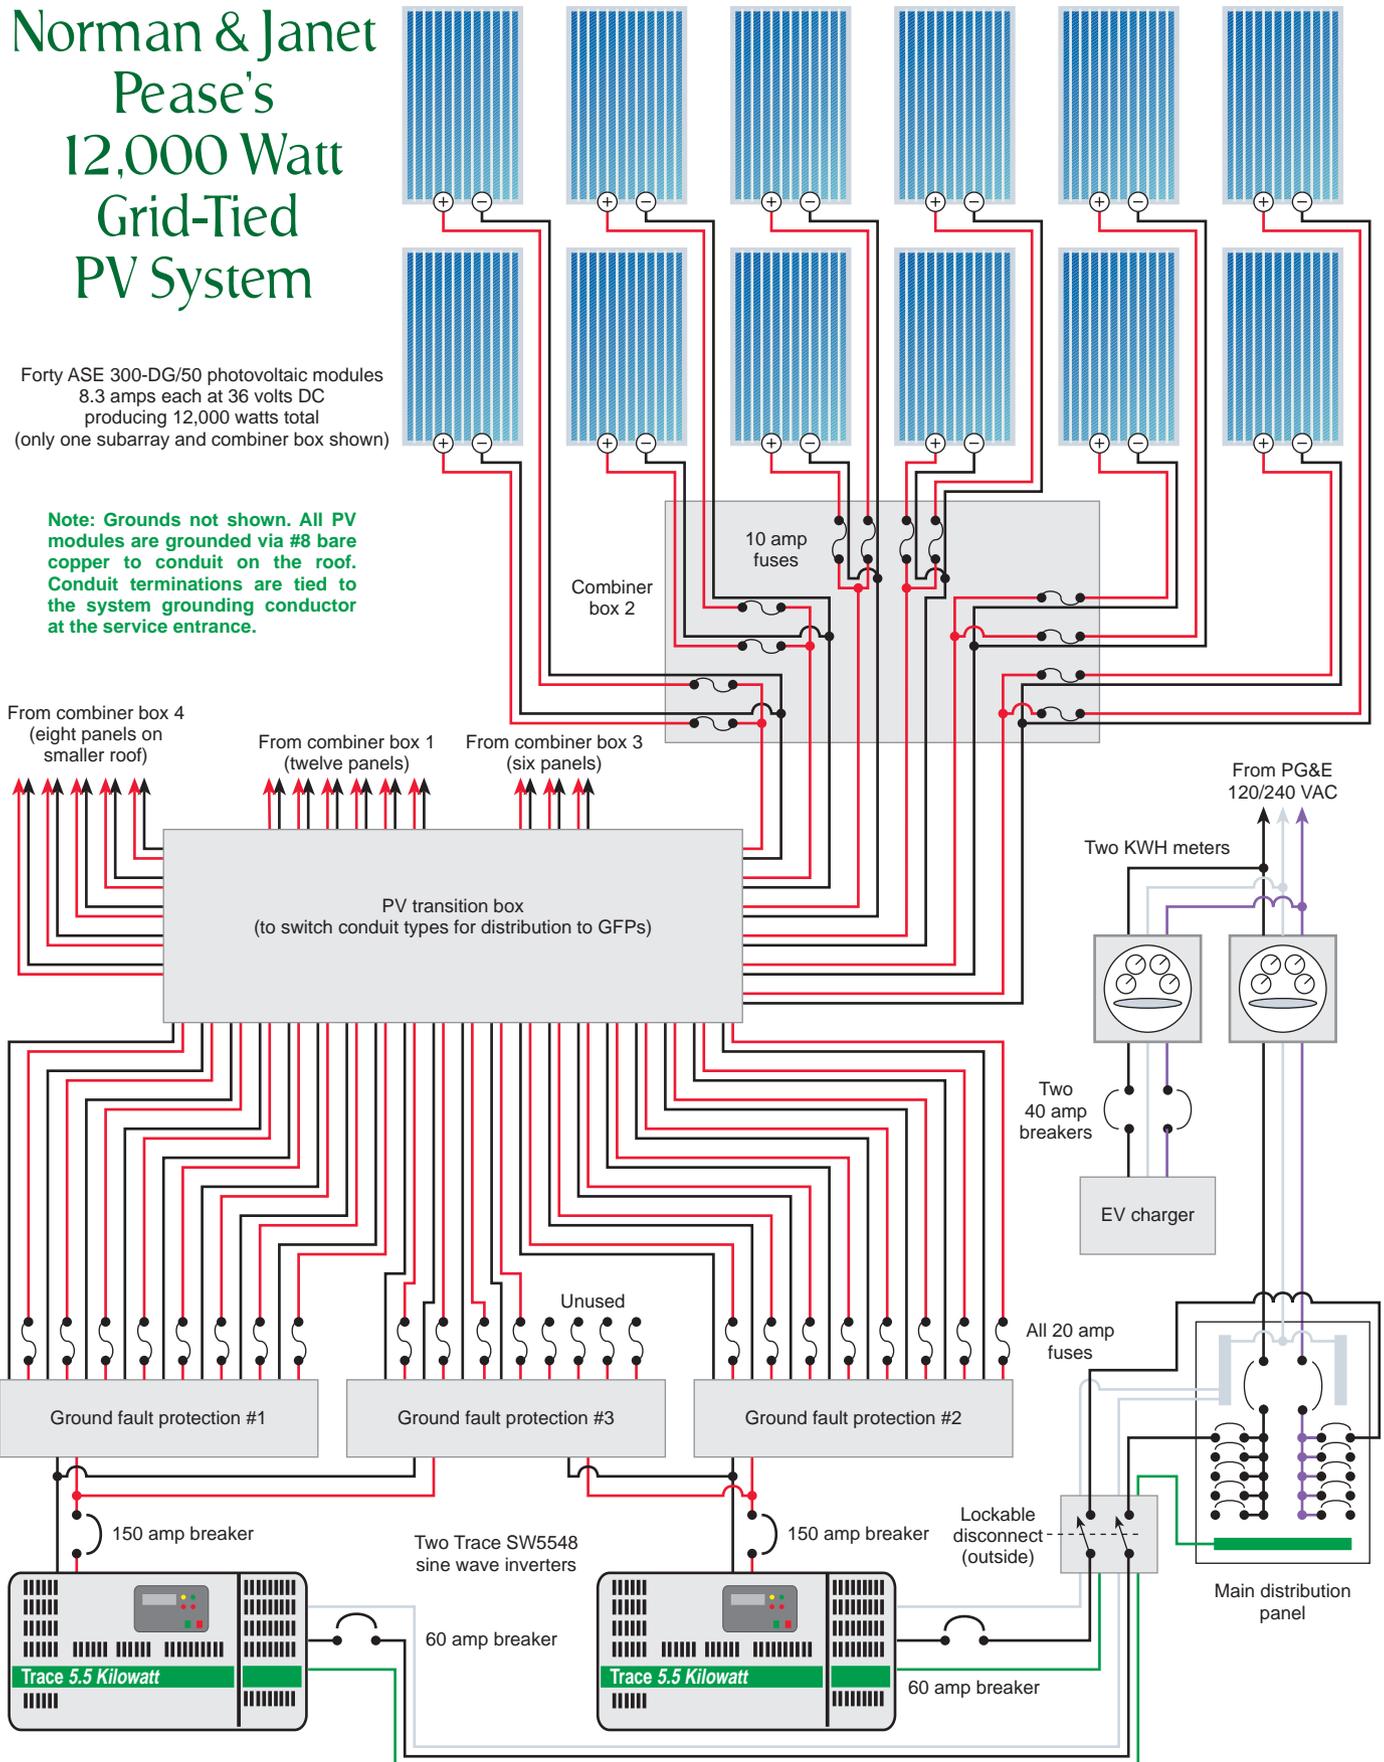

Systems

(2 ASE modules are 12 foot, 5 inches (3.78 m), and the roof was 12 foot, 6 inches (3.81 m), ridge to gutter). In the final design, we laid out thirty modules on the main roof and ten more on the adjoining roof.

We always pay very close attention to aesthetic issues. We placed the modules as close together as possible to minimize the “gapped” look. In order to minimize visual impact, we placed the roof-mounted combiner boxes and conduit runs carefully. Though we could have fit more modules on the adjoining roof, we decided to stop at 12 KW for several reasons. There were no reasonably priced low input voltage inverters available in the 12 to 15 KW range. The easternmost section of the roof had a little shading. And the California Net Metering Law only applies to systems of less than 10 KW AC (which is the final PTC AC rating of this system).

Mounting Hardware

Though the roof on this residence is made with unusual aluminum shakes, our standard LES Z-bracket mounting hardware worked fine. The LES Z-bracket is a mounting system that we designed several years ago. It consists of Z-shaped aluminum pieces that span the rafters and allow the modules to be easily clipped into place. These mounts insure that the modules line up and all penetrations are into the rafters. Mounting into the less stable sheathing can cause leaks.

The mounts also allow us to set a 1/4 inch (6 mm) thermal expansion space between the modules and a 2 inch (51 mm) air space under the modules for adequate cooling. The forty modules are mounted with four rows of LES Z-brackets running across the roof. The mounting hardware is almost completely hidden by the modules when viewed from the ground.

Inverters

We used two Trace UT-SW5548PV inverters because they can handle the 36 VDC nominal output of the modules. Norman also liked the idea of having the parallel connections at the inverter. With this wiring arrangement, he could use a clamp-on ammeter to measure the output from individual module pairs without having to get up on the roof. We mounted the inverters in the garage near the service entrance. They are configured to produce standard 3-wire, 120/240 VAC power.

Wiring

Since the modules are 36 volts DC nominal and the inverter operates at this voltage, we didn't need to make any series connections. The integral tray cable (type TC) output from each module on the lower row was fused (with a 10 A fuse) and then wired in parallel

with the module above it. This wiring was done in one of the four roof-mounted combiner boxes which feed into a transition box (for changing conduit) and then down to the ground fault protection (GFP) units.

Since the Trace GFPs included in these inverters were not large enough to handle 6 KW of PV input, we added a third GFP to handle eight of the modules. All the wiring between the combiner boxes and the GFPs is 90° C (194° F) THHN enclosed in 2 inch (51 mm) EMT. DC output from each GFP was paralleled and routed to a 150 A breaker (which had to be retrofitted in place of Trace's standard 110 A breaker). From there, DC output continues to the DC input on the inverter. All wiring was designed to meet or exceed NEC standards and all DC runs were sized for a maximum one percent voltage drop.

Lockable Disconnect and Metering

Even though it is redundant and not required by the *NEC*, PG&E required a lockable disconnect. The inverter AC outputs were routed through the lockable disconnect before terminating at a double pole 50 A breaker in the main distribution panel.

Unlike most grid-tied PV systems, the metering was a bit tricky at the Pease residence. They had a “time of use” (TOU) meter which they were required to install when they bought their Honda EV Plus. The utility uses this meter to encourage EV users to charge at off-peak times. The utility bills up to 30 cents per KWH during the day, and 5 cents per KWH between 12 midnight and 7 AM.

Under normal circumstances, PG&E would just come out and replace the TOU meter with a standard analog meter. But since Norman had an electric vehicle, it caused great confusion at the PG&E office. He was required by law to have TOU metering for the EV, but he was not allowed to have a TOU meter with his PV system.

After many discussions with PG&E and the building department, we finally agreed to install a dual meter adapter. This device, manufactured by Marwell Co., put the house and PV system on one standard analog meter and isolated the EV on its own TOU meter.

Final Inspections and Commissioning

Once the installation was complete, we contacted the building department for the final inspection. Luckily, the inspector on this job had attended a PV workshop that Jack West taught with Bill Brooks from PVUSA! Unlike many inspectors, he had a reasonably good understanding of PV systems. He quickly ascertained that the system was installed properly and signed off the permit.

With the city's approval, we prepared for the last hurdle—PG&E approval. Our luck held out and we were sent a knowledgeable PG&E engineer whom we had seen on two previous PV jobs. He verified that the inverters were what we had specified, checked for a lockable disconnect, and then passed us with flying colors. With all the inspections out of the way, we cranked up the system and verified that all of the equipment was operating properly.

While Norman and Janet were enjoying their solar electricity, we got to work on claiming the rebate award that we had reserved. It was as easy as sending the CEC a one page Reservation Claim Form, a copy of the signed-off building permit, and a copy of the final purchase invoice. The CEC cut the rebate check within thirty days of this submittal.

Spinning Backwards

Though we aced the PG&E inspection test, we did end up having a minor problem several months after the installation. Norman received an amusing letter in January from PG&E's Revenue Protection Supervisor. It warned that "a recent inspection revealed some irregularities with the electric meter which is causing the meter to rotate backwards." We all had a good laugh.

System Performance

After eight months of monitoring the system, Norman has found that their inverters typically crank out between 33 and 37 amps (at 120 VAC) on sunny days. With the exception of an inverter capacitor that burnt out (it was covered under Trace's warranty), the system has been operating flawlessly now for over eight months.

The system should give them many years of trouble-free renewable energy. The panels are warrantied for twenty years and should last thirty years or more. The system is backed by Light Energy System's full five year parts and labor warranty.

Future Addition

Norman and Janet live in a very suburban area in Orinda, California, with houses scattered along the road winding up a hill. Because they are at the end of a utility line, they experience outages about once a month. Though they had originally decided against batteries, they are now reconsidering the battery backup option.



Above: The Honda EV Plus charging station.



Left: KWH meters for house and car, and the lockable system disconnect.

As Norman put it, "We have all of this incredible equipment on our roof—why should we be at the mercy of our utility?"

An Environmental Investment

Norman and Janet spent a lot of money on a PV system, but definitely got more than their money's worth. Norman's EV is now completely pollution-free. And they now have the satisfaction of knowing that most of the electricity for their home is being generated (or accounted for) by clean PV power. The EV uses about 450 KWH per month, which would be almost half

the PV system's output in the winter or less than a quarter in the summer. Norman puts about 60 miles (97 km) on his EV every day.

According to typical Bay area power mix averages, Norman and Janet's PV system will, over its life, prevent more than 960,000 pounds (435,456 kg) of CO₂ pollution, 7,900 pounds (3,583 kg) of SO₂ pollution, and 3,600 pounds (1633 kg) of NO_x pollution. And this doesn't even include the radioactive waste and destructive river damming that they are preventing.

Norman and Janet also got a lot of money back from the state. About 30 percent of the total system cost was paid for by the buydown program, which is funded by the utility ratepayers of California.

A year ago, Norman and Janet were spending over US\$300 per month on electricity. After installing the solar electric system, replacing a 1960s frost-free refrigerator with a Sun Frost, and installing compact fluorescent lighting, Norman says, "My utility bills are not much more than the \$5 service charge!"

Access

Authors: Burke O'Neal and Jack West, Light Energy Systems, 965 Detroit Ave., Suite D, Concord, CA 94518

800-559-7652 or 925-680-4343 • Fax: 925-680-6588
pv@lightenergysystems.com
www.lightenergysystems.com

Emerging Renewables Buydown, California Energy Commission, 1516 9th St., MS 45, Sacramento, CA 95814 • 916-653-2834 • Fax: 916-653-2543
smiller@energy.state.ca.us
www.energy.ca.gov/greengrid/index.html
Buydown Information: 800-555-7794
Weekly funding update: 800-900-3594

ASE Americas, Inc., 4 Suburban Park Dr., Billerica, MA 01861 • 800-977-0777 or 978-667-5900
Fax: 978-663-2868 • ebasepv@aol.com
www.asepv.com

Trace Engineering, Inc., 5916 195th NE, Arlington, WA 98223 • 360-435-8826 • Fax: 360-435-2229
inverters@traceengineering.com
www.traceengineering.com

PVUSA, PO Box 354, Davis, CA 95617 • 530-753-0725
Fax: 530-753-8469 • www.pvusa.com



TROJAN BATTERY

four color on negatives
7.125 wide
4.5 high

TRACE ENGINEERING

full page

four color on negatives

this is page 17

SEEKING NEW DEALERS TO HARVEST THE SUN



A proud partner with:



BP SOLAR

- We are currently welcoming applications for our BP Solar Dealer Network
- Complete dealer support: engineering, marketing, sales leads, knowledgeable staff
- Single line solar distribution - Offering the world's most efficient solar modules by BP Solar
- Join the fastest growing team of successful renewable energy dealers in the world
- Pre-engineered Utility Interactive Systems

1-800-229-7652
Fax 909-308-2388

27420 Jefferson #104B
Temecula, CA 92590
E-mail: mark@alternativesolar.com
Visit our website:
www.alternativesolar.com

Huge inventory
supplies!



Trace Engineering



Pulse



Specialty Concepts



SouthWest
Windpower



Heart Interface



BP Solar

SIEMENS

Power anywhere.™



Siemens Solar.
So you can live
where you want.
How you want.
Call 1-800-947-6527
or visit us at
www.siemenssolar.com.

Siemens Solar
The Power to Live Anywhere

Residential Fuel Cells:

Hope or Hype?

Russ Barlow

©1999 Russ Barlow

A Plug Power LLC technician evaluates a prototype for the Plug Power 7000 residential fuel cell system. The system will provide an output of 7 KW, enough to power an average-sized home.

Imagine a furnace that not only heats your home, but also quietly produces economical and eco-friendly electrical power. Even better, what if this device could use a number of portable fuels, including propane? This may sound like home power nirvana, but if this technology lives up to its developers' promises, it may herald a new era in residential electrical power.

Almost Heaven, Pennsylvania

I became interested in fuel cells after I purchased a piece of rural property in the Laurel Highlands about 50 miles (80 km) east of Pittsburgh, Pennsylvania. Planning to build has forced me to consider the need for electrical power. When the local utility engineer gave me the bottom line for the 3,500 foot (1.07 km) line extension, I got sticker shock.

The utility wanted over US\$15,000, and that didn't include the cost of the right of ways. Not only was it expensive, but they wanted me to pay them to cut down my beautiful trees in order to install ugly power poles. I thought that maybe underground lines might be the solution. "No problem," the utility engineer said, "just double the price."

I was beginning to think that my great deal on this property might not have been so great after all. There had to be a solution. I needed practical answers that would allow me to be my own power company. My search led me to *Home Power* magazine. I purchased the outstanding *Solar3* CD-ROM and scoured its archives for ideas. I soon had some answers.

Which Do You Want First?

Bad news: the winter daily average of just over two hours of full sun here ruled out cost-effective PV power. Good news: my building site, located high on an exposed open hill, was a good candidate for wind power. My mate seemed a little amused by my scheme. With a wife's keen insight, she asked only two things: "What do we do when the wind stops blowing?" and

"We will have air conditioning—right?" More bad news: I realized that some form of backup power would be needed. And unfortunately, I knew what that meant—a big, expensive, noisy, polluting generator. So much for my rural serenity! There had to be a better way.


As my search continued, I learned of a little-known technology that several cutting edge companies are hurriedly preparing to bring to market. The reward for the winners of this race will likely be huge. These devices have been widely used by NASA in the manned space program over the last three decades to provide reliable electrical power. Even though Sir William Grove first discovered the principles of this technology in 1839, technological advances have only recently made fuel cells affordable.

Hoping that this technology was the answer to my problem, I set out to learn as much as I could about it. While there are a number of companies developing these systems, my schedule allowed time to visit only three. I set out to visit the companies that seemed closest to actually delivering a commercial product. Only two of these were willing to indulge me in a visit.

A Fuel What?

Fuel cells combine hydrogen and oxygen without combustion to produce electricity. Water and heat are the only byproducts of this reaction. The process combines oxygen from the air and hydrogen extracted from any one of a number of suitable hydrogen-containing fuels. The result is DC electrical power produced with far greater efficiency than most of the other non-renewable generation methods, such as internal combustion engine generators. The efficiency of fuel cell systems is approximately 30 to 40 percent.

The promise of fuel cells for the on-site production of electricity is great. Many say fuel cells may do for the power industry what desktop computers have done for the computer business. Just as cellular phones and

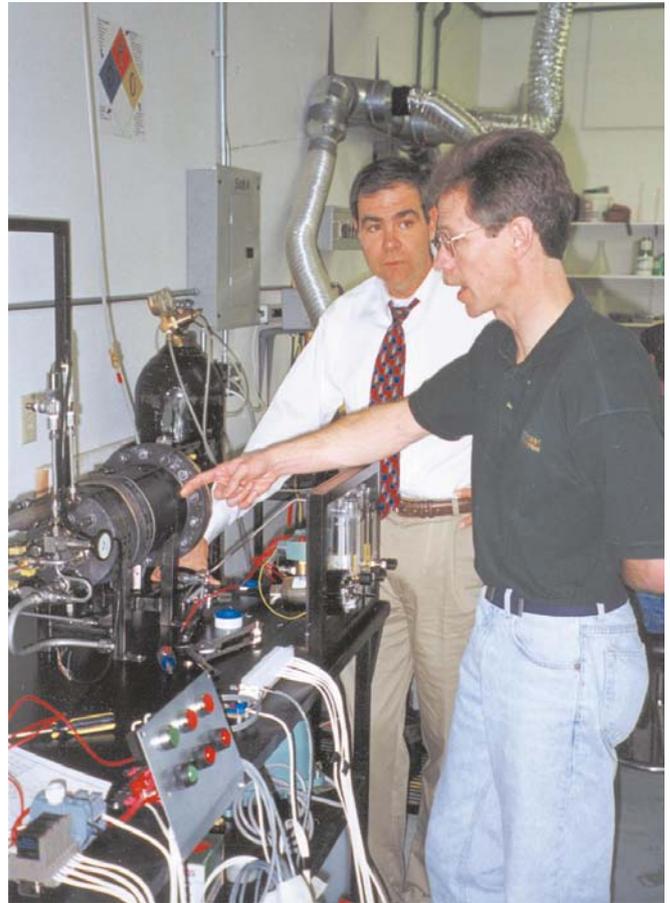


Dr. David Edlund (right), founder of Northwest Power Systems, explains the features of their very compact and efficient fuel processing unit to the author.

satellite TV have "unwired" their respective industries, fuel cells may herald a new age in electrical power distribution.


As most readers of *Home Power* have long known, there are many advantages of onsite electrical production. For developing countries, which have not

Conventional Generator

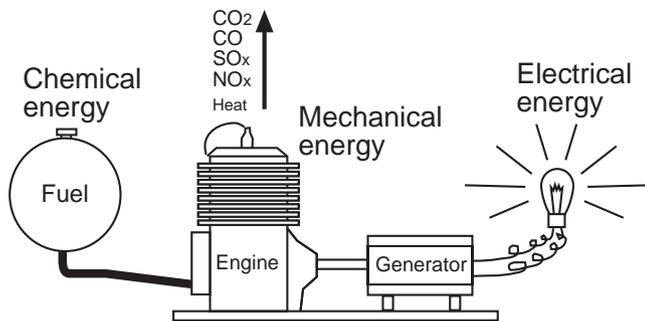


Efficiency = 15–20%
noisy, dirty

Fuel Cell Generator

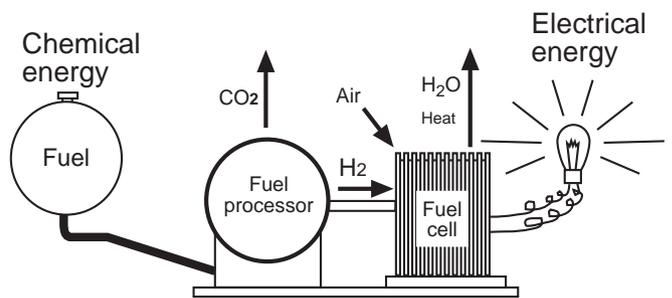

Efficiency = 30–40%
quiet, clean

How a Fuel Cell Works

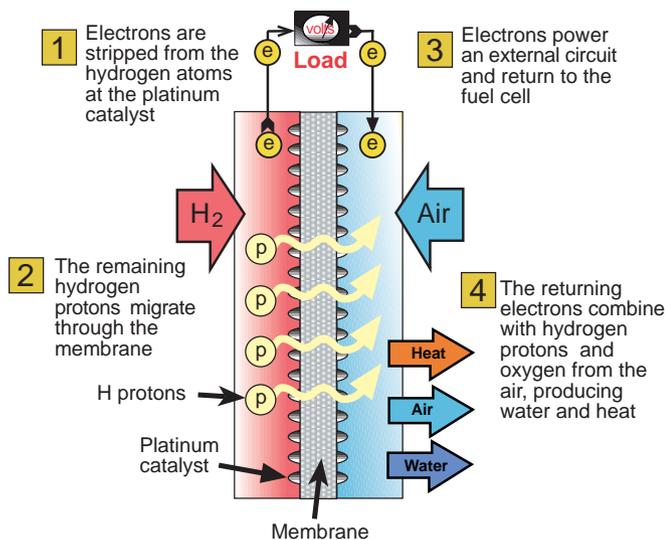

already made massive investments in electrical utility infrastructure, the rewards are even greater. The residential fuel cell may well be the vehicle by which the masses learn to think “outside the box” when it comes to their electrical power.

Fuel cell systems have a purpose similar to the conventional generator that many already use for primary or standby power production. Chemical energy from fuel is converted to electrical power.

In the case of a generator, fuel is converted to mechanical energy by an internal combustion engine. This mechanical energy in turn drives an electrical generator or alternator to produce electrical power. The primary byproducts are heat, CO₂ (carbon dioxide), and water. With most fuels, there are also some nasty emissions including CO (carbon monoxide) and various oxides of nitrogen and sulphur. Typically, the energy efficiency of these internal combustion generators is approximately 10 to 20 percent. That means that about 80 to 90 percent of the potential energy in the fuel is not converted to electricity.

The fuel cell power system likewise converts chemical energy to electrical power, but with a considerably simpler and more efficient path. First the fuel is converted to hydrogen by a series of chemical reactions in a processor. The resulting hydrogen is then combined with oxygen from the air in the fuel cell to produce electrical power in a single step.

Regardless of the fuel used, the chemical byproducts of the complete process are almost entirely CO₂, water, and nitrogen. Considerable low-grade heat suitable for home heating also results.

Heat


The fuel cell system produces waste heat that is easily used for home space and water heating. A simple heat exchanger is all that is needed to make the transfer of fuel cell heat to the home. In fact, most fuel cells use air or water cooling to regulate temperature for better efficiency. The plumbing for heat exchanging is already there and requires little additional cost.

One prototype system uses a single machine as both a furnace and a fuel cell generator. When home heating requirements exceed the waste heat produced by the fuel cell system, additional natural gas is added to the burner to make up any deficit.

Waste heat from engine generators is seldom used due to the carbon monoxide threat and the inconsistent availability of the heat. Fuel cells, in contrast, pose no such hazard and continuously produce some level of usable heat.

In a typical American home, the energy consumed for electrical power (except heating) and the energy consumed for domestic hot water heating are about equal. The heat byproducts from a fuel cell system just about perfectly meet the water heating needs for the average home. One manufacturer’s system produces about 1.3 KW of recoverable heat energy for every 1 KW of electrical energy generated.

An American Fuel Cell employee points out the insulated reformer on their RPG-3K fuel cell system. The system can deliver heating in addition to electrical power of 3 KW continuous and 10 KW peak.

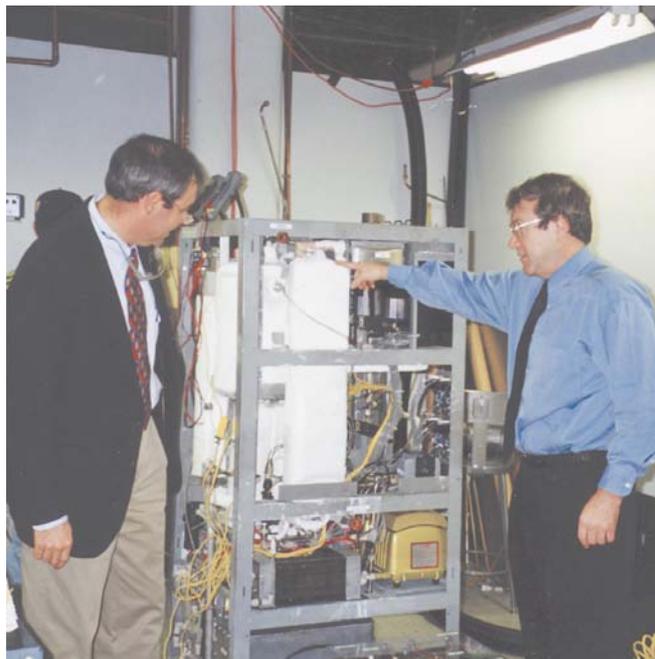

Benefits Of Residential Fuel Cells

What are the benefits of fuel cells in producing electrical power? More specifically, what advantages might they provide to the residential home power user?

1. Conversion Efficiency

Fuel cells offer an efficient way to convert chemical energy directly into electrical energy. As any mechanic knows, the fewer moving parts, the better. The fuel cell stack itself is the picture of simplicity, quietly producing electrical power without a single moving part.

2. Grid Independence

I don't need to preach to regular readers of this magazine about the benefits of onsite power production. In addition to the well known benefits, fuel cells offer several other advantages. First, locating power generation at the point of consumption allows the recovery of any heat generated. This heat can be used to further increase overall system efficiency. This co-generation should eventually allow fuel cells to produce electricity at costs below current grid rates.

Second, the typical 7 to 8 percent losses in power line transmissions are eliminated, and so are the large power line capital costs. Finally, fuel cells offer freedom from concerns about grid reliability and weather related interruptions. Third world countries, with no existing electrical distribution infrastructure, have shown a special interest in residential fuel cell systems. In many of these countries, utility grid transmission and distribution losses approach 50 percent, largely due to theft.

3. Grid Connection

Strangely enough, fuel cells also offer many advantages when connected to the grid. So many advantages, in fact, that utility companies are major investors in several of the fuel cell development startups. Connecting fuel cells to the grid allows utility companies to incrementally increase capacity without the capital outlays required in building new power plants. Unlike PV or wind power, residential fuel cells are available to supplement grid power on demand, regardless of weather, day or night.

4. Environmental Advantages

Residential fuel cell systems offer numerous ecological advantages compared to current utility power production. The operation of the fuel cell itself combines hydrogen and air, with water as the only byproduct. Fuel processing units, also called reformers, are able to convert various fuels into useful hydrogen. Ideally, CO₂ is the only byproduct of this reforming process.

The almost doubled electrical efficiency of the fuel cell means that it produces only about half the greenhouse gases of other non-renewable forms of electrical



The Northwest Power Systems 5 KW mobile demonstration fuel cell system. Note the fuel cell located on the right side of the unit.

generation. Utilization of waste heat for water or space heating even further reduces the relative amount of CO₂ emissions. Traditional internal and external combustion engines also make emissions that create smog and acid rain.

Low noise profile is another environmental advantage. A fuel cell system is typically less than one fourth as loud as a comparably sized gas or diesel generator, so it has a minimal impact on the quiet of a rural setting.

5. Renewable Compatibility

As reliable distributed power production becomes available, it will be much easier for users to create hybrid systems utilizing PV, wind, and microhydro. Fuel cells produce direct current, just as these renewable sources do. Batteries and an inverter are part of both types of systems. Whether renewable systems are added to an existing fuel cell system, or a fuel cell generator is added to an existing renewable system, the combination is a natural and easy one.

6. Fuel Flexibility

Power systems based on fuel cells offer great flexibility for the homeowner. Multiple portable fuels can be used, including propane, natural gas, methanol, ethanol, diesel, and gasoline. Just about any liquid or gas hydrocarbon fuel can be used as a source for hydrogen atoms in the cell.



This innovative fuel processor by Northwest Power Systems can convert a number of fuels into high purity hydrogen to power a fuel cell stack.

Other interesting renewable fuels that can be used with a residential fuel cell system include natural gas made from biomass and home distilled ethanol. Solar-produced hydrogen could also power a fuel cell unit without the need for complex fuel processing, and it would be totally emission-free.

7. Ease of Use and Maintenance

Fuel cell systems run continuously. Compared to a generator set, they operate at low temperatures and have very few moving parts. These systems should require only periodic maintenance and replacement similar to your home furnace.

Fuel Cell Drawbacks

Despite all of their advantages, there are still a few issues that may cloud the short term outlook for fuel cell use in residential applications. What obstacles stand in the path of this new source for renewable energy systems?

Northwest Power System's palladium alloy filter produces extremely pure hydrogen gas, and is good for at least six months service before replacement.



1. Cost

Although pricing for fuel cells continues to drop at a rapid pace, there is still a ways to go before it will be widely affordable. As with any new technology, those who jump in first will no doubt pay a premium price for a less capable product than those who wait. I think anyone who has bought a computer in the last five years can appreciate this phenomenon. The value of fuel cell systems can be fairly appraised only by comparing costs and benefits to competing technologies.

Current initial estimated cost for a turnkey 5 KW fuel cell system is about US\$6,000 to \$8,000. From this total, about 40 percent of the cost is associated with the fuel processor. The next largest expense is the fuel cell stack, accounting for 27 percent of the total. Power conditioning (18 percent) and controls (15 percent) are the remaining costs for a complete system.

2. Unproven Technology

Although considerable testing goes into any new product, we all know that only after large-scale deployment do many of the bugs show up. There will be risks for those who embrace this technology in its infancy, just as there were with early wind and PV systems.

3. Continuous Parasitic Loads

Unlike an engine-driven generator, which can start and produce power almost immediately, fuel cells work best when operated continuously. This means that the internal loads associated with their operation are present even when no power is produced. Usually about 10 percent of the generator's maximum output, this parasitic load is essentially a fixed cost for having power readily available.

Fuel Cell Basics

A fuel cell is an electrochemical device that silently produces direct current electrical power without combustion. Some people have likened a fuel cell to a battery in which the stored power is never depleted, but is constantly being replenished. Although the electrical response of a fuel cell to loads is similar to that of a battery, the electrochemical process is considerably different.

Just like a battery, the core of the fuel cell consists of two electrode plates—the anode and the cathode. In the fuel cell, however, these bipolar plates are separated by a polymer membrane electrolyte. This membrane is coated on both sides with a thin layer of platinum catalyst. At the anode side of the membrane, hydrogen fuel catalytically dissociates into free protons (positive hydrogen ions) and electrons.

In a sort of reverse electrolysis, the free electrons are conducted in the form of usable electric current through the external circuit. The protons migrate through the membrane electrolyte to the cathode side. There they combine with oxygen from the air and electrons from the external circuit to form pure water and heat. This proton migration through the membrane gives this type of fuel cell its name: the proton exchange membrane (PEM) fuel cell.

Although there are other kinds of fuel cells, PEM fuel cells show the most promise for residential applications and are the type used in all systems currently under development. This is largely due to their relatively low operating temperatures (under 100° C; 212° F) and favorable costs.

Recent gains in technology have reduced the amount of costly platinum catalyst required by a factor of almost 100. New, cheaper, and more effective membrane materials have continued to lower costs. Until now, fuel cells were all hand built. But mass production soon promises to bring costs to consumer levels. Just as cheaper silicon chips enabled the home computer revolution in the late 1960s, inexpensive fuel cells are poised to dramatically change the home power industry.

The electrical potential, or voltage, produced by each individual cell is limited by the reactants supplied to the cell. The theoretical maximum for a hydrogen and oxygen cell is 1.23 V, but typical values in current cells are about 0.7 V. To produce higher voltages, individual cells are stacked one against another, wired in series.

Current produced by the cell is directly proportional to the cross-sectional area of the cell where the reaction takes place. Thus, by varying the size and number of layers in the fuel cell "stack," it is possible to custom build a unit in order to meet a wide range of DC electrical requirements.

A Typical Residential Fuel Cell System

Although the fuel cell is the heart of the device, there are other important components that make up a residential fuel cell system. First, the fuel processor must convert usable fuel into pure hydrogen for use by the fuel cell stack. Next, the fuel cell stack converts this hydrogen into direct current electrical power. Finally, as in most renewable energy systems, power must be



A technician tests a fuel processor that runs on kerosene and produces up to 50 liters per minute of hydrogen containing about 2 ppm of CO.


stored and conditioned for consumption, using batteries and an inverter.


Fuel Processor

The fuel processor is what really makes residential fuel cell systems practical. In order to operate, fuel cells require extremely pure hydrogen. Typically this must contain CO concentrations of no greater than 50 parts per million (ppm) with less than 10 ppm desirable. The job of the fuel processor is to take an available fuel and convert it in sufficient purity and quantity to run the cell. At the same time, it should eliminate the undesirable emission byproducts of the conversion.

The majority of fuel processors currently under development for residential fuel cell systems utilize the following process. First, the fuel processor removes

Simplified Residential Fuel Cell System

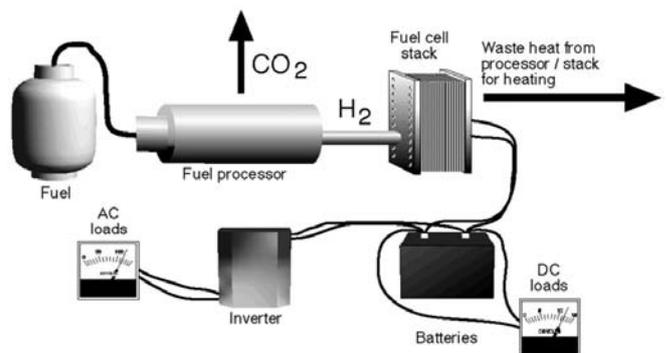

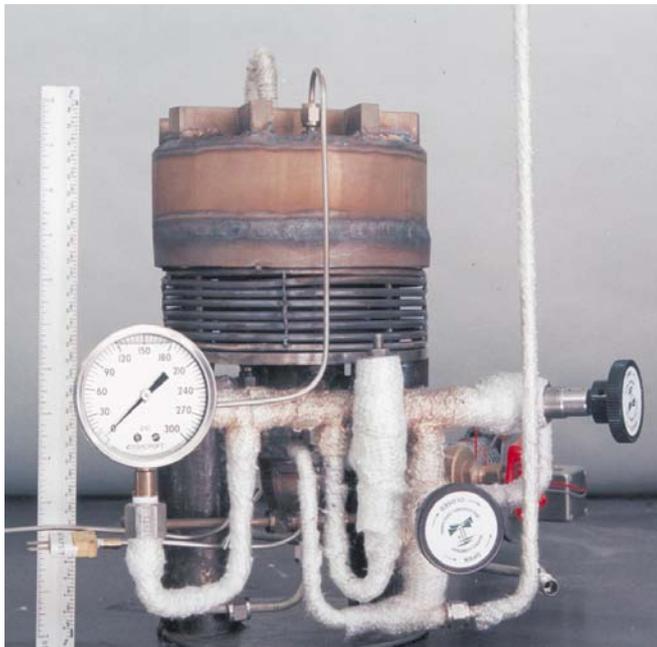

This remarkably compact fuel processor by Northwest Power Systems can deliver enough high purity hydrogen to power a 1 KW fuel cell.

sulfur from incoming fuel by utilizing a bed of zinc oxide. The fuel, steam, and air react at about 1,500° F (816° C) in a process called steam reforming. The result is hydrogen gas that contains excessive amounts of carbon monoxide.

Carbon monoxide is reduced by a water shift conversion reaction, during which large amounts of the carbon monoxide react with steam to produce CO₂ and additional hydrogen. Finally, the remaining carbon monoxide is almost eliminated through a selective oxidation reaction that creates CO₂. The resulting hydrogen gas is then of sufficient purity for use by the fuel cell stack.

An Innovative Exception

An exception to this fuel processor model was the unit I saw during my visit to Northwest Power Systems in Bend, Oregon. Their rather simple fuel processor utilizes steam reforming like the other processors, but removes the additional carbon monoxide in a unique way. Their process is borrowed from an approach long used by the hydrogen gas industry. The carbon monoxide-contaminated hydrogen gas is filtered through a membrane that allows only the hydrogen to pass through.

The filter is made up of about 20 membrane layers of palladium alloy foil, each only one thousand of an inch (0.025 mm) thick. It produces hydrogen with carbon monoxide levels of about 2 ppm. This purity is almost twice as good as any other reforming method. Gases

that do not pass through the membrane are looped back and burned to heat the steam reformer. "This method of hydrogen purification was our starting point, and we built our fuel processor backward from there," explained Dr. David Edlund, founder and president of Northwest Power Systems.

The result is a fuel processor which is far less complex, is much smaller, and costs less. While I was at their lab, I observed these units producing large quantities of very pure hydrogen while using methanol and kerosene as fuels. Dr. Edlund showed me a small processor, about nine inches in diameter and only six inches high (23 x 15 cm), that could produce sufficient hydrogen to support a one kilowatt fuel cell.


Edlund originally conceived of the concept for use on sailboats. Noisy generators are a great distraction to the purity of sailing, and he saw the quiet, small fuel cell generator as an answer to this problem. The real beauty of fuel cells for small systems is that the electrical efficiency of the fuel cell stack is actually higher at lower loads. Unlike an internal combustion power generator, whose fuel consumption remains high even at low loads, the fuel cell seems ideally suited for all phases of an efficient battery charging profile.

Fuel Cell Stack

The fuel cell stack converts hydrogen and oxygen into electrical power and heat energy. The typical PEM fuel cell operates at approximately 150° F (66° C). Hydrogen from the fuel processor and oxygen from the ambient air are combined to produce power. During my visit to American Fuel Cell Corporation in Boston, I got a close look at several fuel stack assemblies and their individual components.

The company's founder, David Bloomfield, explained to me that it's a long way from theory to a viable fuel cell. The hydrogen and oxygen must be delivered in a continuous and uniform way to the membrane. A second problem is maintaining the delicate humidity

Fuel Cell Stack Efficiency

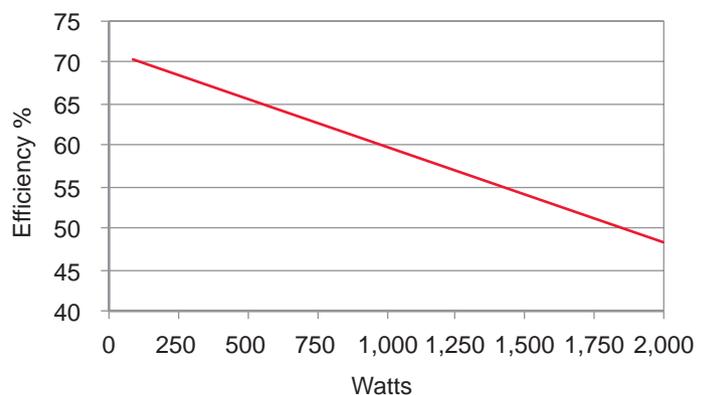

balance in the cell. Much like a human lung, the moisture level has to be just right. Too much humidity can clog the membrane, inhibiting proton movement. Conversely, if the membrane dries out, breaches can develop, rendering the cell inoperable. The final hurdle to overcome, according to Bloomfield, was developing a mechanism to maintain the uniform cell stack temperature, allowing maximum electrical performance.

Each individual cell is made up of two flow field plates with a series of channels routed into the surface. The channels are designed to evenly distribute hydrogen and air to both sides of the proton membrane assembly that separates them. The membrane assembly consists of two porous carbon or graphite electrodes (cathode and anode) each with a thin layer of platinum catalyst. These are bonded to either side of the proton exchange membrane. Individual cells are assembled together to create the fuel cell stack.

Fuel cells react to loads much as batteries do. As the load is increased, the voltage drops to a point where there is no useable power. This is shown in a polarization curve that plots cell potential (volts) versus cell current density (amps/cell area).

Typical fuel cell stacks convert hydrogen to electricity with an efficiency of approximately 55 to 60 percent. Other components within the residential fuel cell system further reduce overall efficiency to about 30 to 40 percent.

Thermal and Water Management System


This system maintains the fuel stack and fuel processor in thermal and mass equilibrium. It uses pumps, fans, heat exchangers, and controls, which create a constant power requirement on the fuel cell generator whenever it is running. The total parasitic load for existing residential fuel cell systems is about 250 watts. During my visit to American Fuel Cell, Bloomfield said that reducing this load by half is one of his highest priorities.

Cold startup of most fuel cell systems is a somewhat lengthy process. Up to twenty minutes is required to produce the steam needed and to bring the system into equilibrium. Because of this, fuel cell systems are designed to run on a continuous basis. For a typical system, this "phantom load" would consume about an additional half gallon (1.9 l) of propane daily, regardless of power requirements.

Power Conditioning System

Power conditioning in fuel cell systems is very similar to that of PV and wind systems that have been detailed in *Home Power* for years. DC power produced by the fuel cell stack is used for battery charging and for providing AC power through an inverter. A battery bank or some other storage mechanism is necessary because the fuel

Fuel Cell Polarization Curve

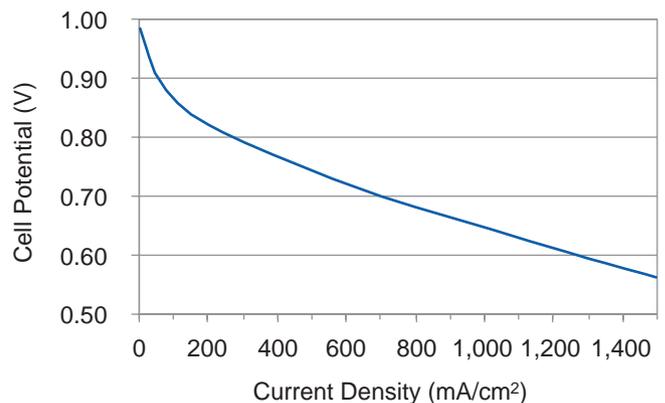

This polarization curve shows the relationship between voltage and current for an individual cell in a typical fuel cell stack.

processor cannot respond to instantaneous requirements placed on the fuel cell.

The fuel cell can respond very quickly to load demands, if provided with ample hydrogen and oxygen. But there is no way for the fuel processor to anticipate an upcoming need and produce and distribute hydrogen quickly enough. Although hydrogen could be produced in advance and stored in anticipation of a need, none of the systems I saw used this approach. Batteries also allow for load leveling so that peak loads can temporarily exceed the continuous maximum output available from the stack.

No Buyer's Guide Yet

When I set out to explore what was on the horizon with regard to residential fuel cell systems, I hoped to be able to present a nuts and bolts comparison of soon to be released products. I envisioned a chart that one could use in selecting a system for home use. Unfortunately, my research has revealed that most systems are still in the prototype stage.

While a number of companies have proven fuel cell designs, not many have developed viable fuel processing units. Even fewer have actually made prototype turnkey systems designed for residential use.

The Major Players

American Fuel Cell Corporation has probably done the most complete work toward development of a viable residential fuel cell system. During my visit there, I saw their prototype, the Residential Power Generator (RPG-3K). It was neatly packaged into a single case, able to process natural gas, and produced up to 10 KW. These folks have really done their homework and have an early lead on many fronts. They have designed and built their own fuel cell stacks and fuel processors. The unit I saw was being readied for shipment to a German natural gas utility for testing.

Fuel Cell System Components

<i>Component</i>	<i>Efficiency</i>	<i>Cost</i>
Fuel processor	79%	40%
Fuel cell stack	57%	27%
Power conditioning	95%	18%
Control	90%	15%
Overall	39%	100%

The company's projections show that new homes with natural gas available could easily use an RPG-3K in place of a furnace and have electricity and heating at less than current rates. Retrofits of existing homes were also competitive with grid-connected prices.

American Fuel Cell's president expressed an interest in developing even smaller units to work with PV and wind power systems. "The environmentally friendly nature of our fuel cells just seems to make sense as a way to augment renewable systems," he explained. "Fuel cells are plainly the cleanest way to produce electrical power from non-renewable fuel sources."

Northwest Power Systems has an innovative and apparently successful approach to the difficult problem of fuel processing. In October of 1998, they demonstrated their methanol-powered fuel cell system on a 2,250 square foot (209 m²) residence that they disconnected from the grid. The additional heat co-generated during the test was utilized in heating a 460 square foot (43 m²) attached garage.

Their demonstration unit is three feet wide by three feet deep and three and a half feet tall (0.9 x 0.9 x 1.07 m). It was taken on a road trip throughout the northwestern U.S. to conduct similar residential demonstrations. When I observed the unit operating in their lab, it was remarkably quiet, producing only a subdued hiss. They also showed me a similar processor in their lab, running on kerosene and producing similarly pure hydrogen.

Northwest Power System's David Edlund sees the small size of the company as an advantage during this period of residential fuel cell evolution. "If we come up with a better idea or a new way of doing something, we have a meeting in the morning, and by afternoon we're already moving in that new direction," he explained. It was obvious here, as at American Fuel Cell Corp., that people are excited about fuel cells.

Plug Power, near Albany, New York, has also operated a demonstration unit powering a home. They were joined in their development and marketing efforts by a major partner, General Electric. Plug Power claimed that the proprietary nature of their research would not permit them to allow me on their premises. Repeated attempts for an invitation to visit or a phone interview were declined. I could take a hint, and gave up.

Their press package was lacking any real technical details. Further investigation revealed that their much-publicized fuel cell demonstration home had been powered by hydrogen from a large truck parked nearby. Plug Power seems to be focusing its marketing efforts towards grid-connected customers. They promise to deliver residential electrical power at rates below those offered by the current utility companies.

Other Players

Government research grants have placed much of the focus in the fuel cell industry on automobile applications. Ironically, the technical problems of automotive fuel cells are great compared to those of stationary, residential applications. Only recently, as technological advances have lowered the price of fuel cells, has private investment shifted the focus towards the residential market.

There are a number of companies that I did not visit that are currently developing residential fuel cell systems. Avista Labs in Spokane, Washington has developed a unique approach to fuel cell design. Unlike traditional stacked-plate architecture, which requires the entire unit to be disassembled for repair, they have devised a modular design which allows "hot swapping" of individual modules while the unit remains online. These units use no expensive graphite plates in their manufacturing process which leads to lower costs.

Energy Partners, in West Palm Beach, Florida, has long been a leader in PEM fuel cell development. They have provided high-performance fuel cell stacks for research in the automobile industry. Recently, they began to produce composite graphite bipolar plates. Suited for mass production, this technology will reduce Energy Partners' cost for this major component from US\$100 to less than US\$2 apiece. Energy Partners is in the testing stage for their NuPower line of residential fuel cell power systems.

Ballard Systems, of Burnaby, British Columbia, Canada, is another company involved in development and testing. A large, well-capitalized company, Ballard has produced many fuel cell innovations for the automotive industry. They have also delivered large commercial fuel cell power systems for use by commercial utilities. According to their press package, their 250 KW PEM fuel cell remains the most powerful in the world.

Ballard has focused mainly on the automobile industry and large commercial applications. They have announced their efforts to develop residential power systems based on fuel cells but have not yet detailed any products. Their strong technological experience will guarantee them a position in the market if they pursue it.

H-Power, located in Belleville, New Jersey, was a pioneer in the commercialization of fuel cells. They presently have a manufacturing facility producing fuel cells for commercial sale. They have sold a number of hydrogen-powered fuel cell systems to the New Jersey Department of Transportation for use on portable highway warning signs. Though they have made public their intention to enter the residential fuel cell system market, they have not released specific details on any system.

Is There a Fuel Cell In Your Future?

Despite the intense development efforts, commercially available turnkey residential fuel cell power systems are still almost two years away. Considering the rapid pace of development, there may be substantial changes in the technology even in this short time.

Developers are forming relationships with utility companies and other investors to facilitate development and product launch. The electric companies, not wanting to lose out to a new competitor, are keenly interested. The gas utilities, seeing a huge new potential market, are likewise attentive. And the fact that industrial giant General Electric is involved is a sure sign that this industry will likely not go away. What does this all mean to those already involved in the renewable energy movement?

Legitimization

As onsite-produced power becomes commonplace, life will no doubt become easier for all RE users. As utility companies begin to routinely connect fuel cell units to the grid, it should be a lot more difficult for them to discourage wind and PV system connections.

We should pay close attention as laws are changed to accommodate this shift, and make sure no one gets left out. Costs for many parts already used in renewable energy systems—inverters, for example—could become much lower due to mass production as fuel cell systems proliferate.

Opportunities

As this technology blossoms, it will be full of opportunities for those currently involved in the renewable energy industry. Readers of this magazine have already solved many of the problems that residential fuel cell developers are just starting to discover. For example, I'm sure that fuel cell companies have a lot to learn about real world battery use.

As people become more accepting of off-grid life, sales of non-renewable systems to augment the new residential fuel cells should explode. I even expect that off-grid real estate values will increase substantially once this technology is popularly accepted.

Challenges

This new technology will provide exciting new challenges in the RE world. By their very nature, those currently involved in RE are inclined to be "early adopters" of this new technology. Many of you have already shown your willingness to experience the hardships (and joys) of independent power. Both of the companies I visited acknowledged that present RE users would likely be among the first to purchase their products. I'm excited to see how some of you will solve the problems that will undoubtedly arise.

I hope to become a beta tester for one of these new systems when they are ready for residential testing. If I'm successful, I promise to share my experiences with you. In the meantime, I am planning to install a wind turbine to meet my immediate power needs, and eagerly wait to see if the promise of residential fuel cells becomes a reality.

Access

Author: Russ Barlow, 320 Oak Grove Ct., Wexford, PA 15090 • 724-935-6163 • Fax: 724-935-0745
srbarlow@nauticom.net

American Fuel Cell Corp., 268 Summer St., 4th Floor, Boston, MA, 02210 • Fax: 617-695-3272
info@analyticpower.com • www.analyticpower.com

Avista Laboratories, 1411 East Mission, PO Box 3727, Spokane, WA 99220 • 509-495-8753
 Fax: 509-495-2033 • rdunlap@avistacorp.com
www.avistacorp.com

Ballard Power Systems, 9000 Glenlyon Parkway, Burnaby, British Columbia, Canada V5J 5J9
 604-454-0900 • Fax: 604-412-4700
investors@ballard.com • www.ballard.com

Energy Partners, L.C., 1501 North Point Parkway, West Palm Beach, FL 33407 • 561-688-0500
 Fax: 561-688-9610 • mmcgann@energypartners.org
www.energypartners.org

Fuel Cells 2000, 1625 K St. NW, Suite 790, Washington, DC 20006 • 202-785-9620
 Fax: 202-785-9629 • www.fuelcells.org
 Non-profit educational fuel cell organization.

H-Power, 60 Montgomery St., Belleville, NJ 07109
 973-450-4400 • Fax: 973-450-9850
moreinfo@hpower.com • www.hpower.com

Northwest Power Systems, 924 SE Wilson Ave. Suite F, Bend, OR 97702 • 541-383-3390 • Fax: 541-383-3439
nps@northwestpower.com • www.northwestpower.com

Plug Power, LLC, 968 Albany-Shaker Rd., Latham, NY 12110 • 518-782-7700 • Fax: 518-782-7914
info@plugpower.com • www.plugpower.com





SOLAR FOR THE
NEXT CENTURY



ELECTRICITY

FOR THE

INDEPENDENT HOME OWNER



Take Your First Step to Electrical Independence with Millennium's Personal Power Systems

- Designed for use with or without Utility Power
- Complete and easy to install
- Easily expandable as your needs grow
- Quality-certified components offering the best value
- Tomorrow's technology today
- Free Design Guide
- **Why pay more? Buy Direct**

MILLENNIUM POWER SYSTEMS

TEL: 410-686-6658

FAX: 410-686-4271

E-MAIL: mail@offgrid.com

WEB-SITE: www.offgrid.com

UNBELIEVEABLE PRICE WITH UNBEATABLE SERVICE
www.offgrid.com

RECYCLED POWER



At U.S. Battery, we're committed to doing our part in keeping the environment clean and green for future generations, as well as providing you with premium deep cycle products guaranteed to deliver your power requirements when you need them.



**DON'T SETTLE
FOR ANYTHING LESS
THAN U.S. BATTERY
PRODUCTS!**

1675 Sampson Ave. Corona, CA 91719 (800) 695-0945 / 653 Industrial Park Dr., Evans, GA 30809 (800) 522-0945

SOUTHWEST WINDPOWER

full page

four color on negatives

this is page 32

Some Things Simply Thrive in the Sun.

**Coming
Soon!**

Introducing "HIT POWER 21"

Featuring 17.3% Conversion Efficiency

Sanyo/Solec bring you the Next Generation of Hybrid Solar Cells, featuring the World's Highest Conversion Efficiency for both Residential and Commercial use.

The HIT (Heterojunction with Intrinsic Thin-Layer Solar Cell) is a hybrid composed of a thin single crystal silicon wafer surrounded by layers of ultra-thin amorphous silicon. HIT modules also feature dawn-to-dusk charging and can be placed in high temperature locations without much decrease in output.

Ultra-Thin, Ultra-Efficient... Unrivalled Performance.
It's Advanced Solar Technology you'll want to know more about.



...bringing the sun down to earth

For more information, call (310) 834-5800.

Experiments

With Solar Hot Air Collectors

Ralf Seip

©1999 Ralf Seip

The solar collector installed outside the basement workshop.

I have been interested in alternative energy sources since about 1985. At that time, I was experimenting with solar-powered radios and battery chargers. Today, about 15 percent of the energy my family consumes is generated by a 240 watt photovoltaic system, with larger generating capability expected in the future. The latest addition to our solar energy system is a solar hot air collector.


For years I have been wanting to experiment with a solar heating system to reduce winter heating bills, and a solar hot air collector seemed the right place to start. These collectors are simple because air is the heat transfer medium. This means that the glycol loops, heat exchangers, valves, and pumps commonly found in liquid collector systems are not needed.

The application of solar hot air collectors is slightly different than liquid collectors. Air collectors are typically used for space heating, while liquid collectors are typically used for water heating. Through the proper use of heat exchangers, however, either system can be used to heat water or air.

Collector Basics

Solar hot air collectors are simple and reliable. Cold air is drawn through the collector with a blower. It is heated as it comes in contact with an absorber plate exposed to the sun, and then returned as hot air for heating applications. The collector contains no moving parts, and is typically constructed of an aluminum frame, insulation on the back and sides, and tempered glass on the front. A black absorber plate is located between the glass and the back insulation. A baffle is used to direct the air flow path.

Figure 1: Basic solar hot air collector and operation.

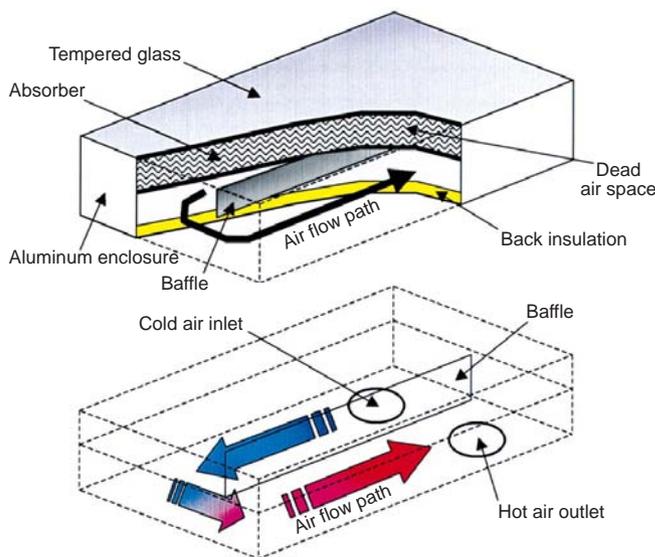

These collectors are of the single glazing/dead air space design, since some air is trapped between the absorber and the glazing. The absorber warms up when exposed to the sun, and some of this heat is transferred to the air between the absorber and the back insulation. Some absorber plates have dimples that create turbulence in the air, to better transfer heat to the air. Figure 1 shows a typical solar hot air collector of the single glazing/dead air space design.

System Description

The solar hot air collector system described in this article is used to warm up my basement workshop. Eventually, it will be used to warm up the living room located above the workshop through the existing forced air furnace ductwork. For the initial tests and evaluation period, I wanted to keep modifications to the house and existing ducts to a minimum.

The system consists of a 1.2 by 2.4 m (4 x 8 ft) Sun Aire solar hot air collector sold by AAA Solar, several insulated 15 cm (6 in) diameter ducts used to transport air to the collector and back to the workshop, a low-power fan to force the air through the collector, and a temperature control circuit that turns the fan on and off as required.

Collector

The collector faces south and is mounted on a simple but strong stainless steel structure, at an angle of 55 degrees. I assembled the structure out of 1.2 and 1.5 m (4 and 5 ft) lengths of slotted steel bars, available at local hardware stores. As a rule of thumb, to maximize the heating capability of the collectors in the winter months, they should be tilted to an angle equal to your location's latitude plus 15 degrees.

The structure is located close to the basement wall and is weighted down by 110 kg (243 lbs) of gravel. This temporary arrangement has survived wind gusts over 110 kilometers per hour (70+ mph). Eventually, I hope to anchor the structure properly to the concrete slab on which it now sits. The photographs show the collector and mounting structure. The collector is of the single glazing/dead air space design described previously, and its absorber plate is dimpled for higher transfer efficiency.

Fan & Ductwork

An insulated (R-4) flexible duct about 3 m (10 ft) in length transports cold basement air from the cold air

inlet to the collector. I used aluminum tape on all duct joints to ensure an airtight seal. A small 14 watt AC muffin fan is able to push about 1.7 m³ per minute (60 cf/min) of air through the collector. The collector heats the air, which returns to the basement through a similar duct and exits through the hot air outlet.

Muffin-type fans are typically not well suited for pushing large volumes of air through long ducts. Squirrel cage blowers (centrifugal blowers) are better at this task. The lowest power squirrel cage blower I found consumed 45 watts. The muffin fan seems to be adequate for this installation, as will be seen from the measured temperature increases and computed efficiencies later.


To keep house modifications to a minimum, the ducts enter and leave the basement through a window. I built a custom plywood/insulating foam/plywood panel that fits inside the open window frame and holds the ducts, fan, and circuit in place. I fastened the panel to the window frame with screws and used foam weatherstripping to prevent cold air from seeping into the house.

It is important to locate the hot air outlet above the cold air inlet, and the collector surface below both. This way, the fan is not working against the natural tendency of warm air to rise. It also transfers the colder workshop air to the collector first, and warmer workshop air does not get cooled down by the colder collector at night. The result is a more efficient system that does not require the addition of a backdraft damper to prevent nighttime cooling through the collector.

If such an arrangement of collector and duct exits is not possible (such as in rooftop mounted systems), a

Back of the solar collector showing part of the support structure, as well as insulated cold and hot air ducts.



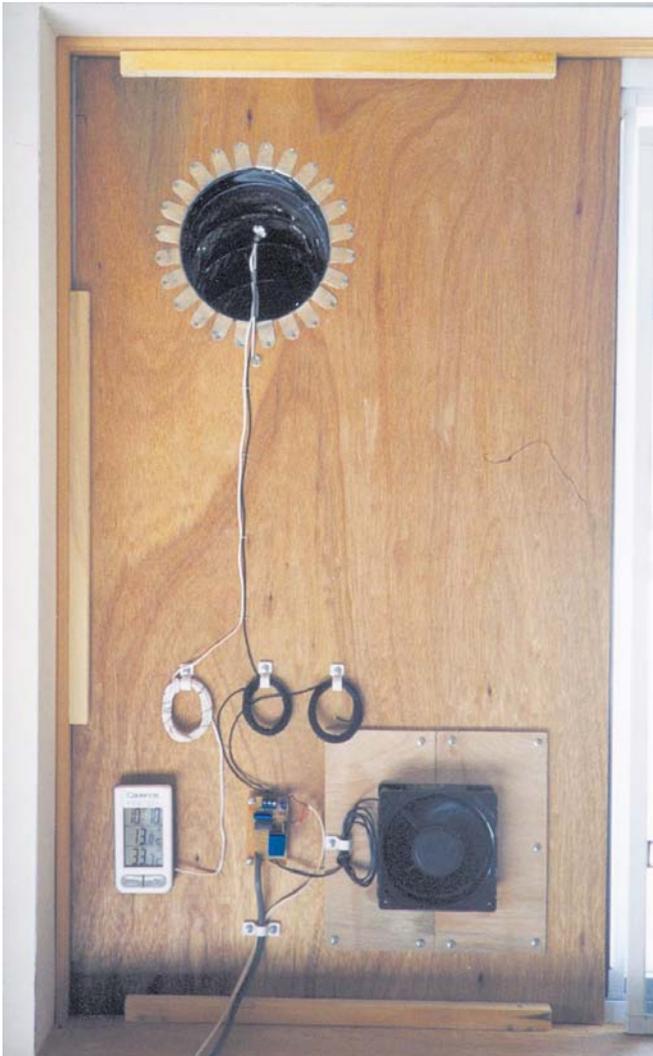

Insulated duct adapter panel, showing the fan in front of the cold air inlet (lower right), the hot air outlet (upper left), the temperature control circuit, and the dual thermometer.

backdraft damper will be needed to prevent nighttime cooling. Notice the similarities between these guidelines and those for thermosyphon liquid-based collector systems. AAA Solar Supply's *Solar Design Catalog* has excellent installation guidelines for rooftop-mounted solar air collectors.

Temperature Control

The fan is controlled by a simple temperature control circuit. I designed and built the circuit over a weekend, and it is described in detail in the sidebar. For the circuit to operate properly, one thermistor needs to be exposed to the cold workshop temperature (close to the cold air inlet), and the second thermistor needs to be placed inside the hot air outlet.

System Cost

Item	Cost
4 x 8 ft solar hot air collector	\$415
Shipping and crating charges	\$185
Mounting structure	\$80
Ducts, adaptors, and insulated panel	\$40
Temperature control circuit and fan	\$25
Dual-monitoring thermometer	\$15
Total	\$760

Warm air rising from the collector through the duct will reach the second thermistor, increasing its temperature. Once its temperature is approximately 2°C (3.6°F) warmer than that of the cold air thermistor, the fan is activated automatically and the system starts pushing warm air into the room.

To collect the temperature information presented in this article, I installed a digital thermometer capable of measuring two temperatures simultaneously. I used this thermometer to measure the workshop temperature and the temperature of the warm air coming from the collector after it had travelled through the 3 m (10 ft) return duct. The thermometer and temperature circuit can be seen in the photo to the left.

System Cost

The main components of the system and their cost are listed in the table. Notice that the total system cost is similar to that of about two typical photovoltaic modules. Sadly, crating and shipping charges are a large percentage of the overall system cost.

System Performance

To best illustrate the operation and effectiveness of the solar hot air collector, I measured typical air inlet, air outlet, and outside air temperatures for several days in intervals of 30 minutes. This allowed me to compute the power and energy produced by my system, as well as its efficiency. It also allowed me to give quantified answers to questions such as "Does the basement feel warmer now?" and "Does the system pay for itself?" It is interesting to see that solar energy does definitely impact the bottom line.

To perform these computations, it is necessary to introduce several physical constants, system-specific constants, and the underlying simple heat energy equation.

Physical Constants & Conversions

Specific heat of air (constant pressure, and 27 to 47°C):

$$c = 1.007 \text{ kJ / kg } ^\circ\text{K}$$

Density of air (at 760 mm mercury, and 40°C or 104°F):

$$d = 1.122 \text{ kg / m}^3$$

Average solar radiation S:

$$S = 1 \text{ kW / m}^2$$

Kilowatt-hour to kilojoule conversion:

$$1 \text{ kWh} = 3.6 \times 10^3 \text{ kJ}$$

System-Specific Constants

Collector area A:

$$A = 2.9 \text{ m}^2 = 31 \text{ ft}^2$$

Air volume v moved by fan:

$$\begin{aligned} v &= 60 \text{ ft}^3 / \text{minute} \\ &= 1.7 \text{ m}^3 / \text{minute} \\ &= 51 \text{ m}^3 / 30 \text{ minute} \\ &= 102 \text{ m}^3 / \text{hour} \end{aligned}$$

Air mass m moved by fan:

$$\begin{aligned} m &= v \times d \\ &= 57 \text{ kg / 30 minutes} \\ &= 114 \text{ kg / hour} \end{aligned}$$

Heat Equation

Heat transfer rate H (result in kilojoules per hour):

$$H = m \times c \times (T_2 - T_1)$$

Heat transfer rate H (result in kW):

$$H = m \times c \times (T_2 - T_1) \div (3.6 \times 10^3)$$

Instantaneous efficiency e:

$$\begin{aligned} e &= (H_{\text{actual}} \div H_{\text{max}}) \times 100\% \\ &= [H \div (S \times A)] \times 100\% \end{aligned}$$

For this particular system, we use 2.9 kW for S x A, which corresponds to the area of the solar collector times the solar insolation. This is for times of maximum solar insolation only.

$$e = (H \div 2.9 \text{ kW}) \times 100\%$$

Notice that the heat flow rate H (typically expressed in joules per hour) is easily converted to kilowatts. The heat flow rate H depends on the specific heat c of the material (air in this case), the rate of mass transfer m through the collector, and the temperature difference (T₂-T₁) across the collector in degrees Kelvin (°K). Note that the calculation of H is a power (not energy) calculation.

Figure 2: Cold air inlet, hot air outlet, and ambient temperatures during a sunny winter day.


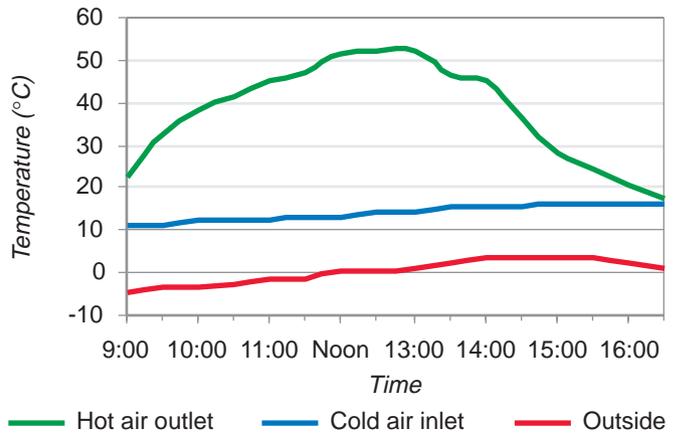


Figure 3: Energy produced during a sunny winter day.

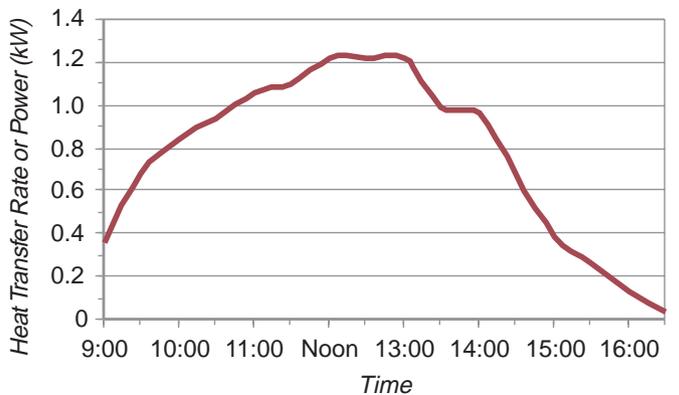

By measuring both collector inlet air temperature (T₁) and collector outlet air temperature (T₂) and using the above equation, the instantaneous power added by the sun through the collector to the air in the basement can be computed. The energy (kWh) can then be calculated by integrating the instantaneous power (kW) over time, in hours.

Figures 2–5 show the measured temperatures and produced power for two days during the 1999 Michigan winter. Figures 2 and 3 show the measured temperatures and computed power during a nice, sunny winter day (outside temperatures of -5 to 3°C, or 23 to 37°F). The total energy produced by the solar collector during the day was approximately 6 kWh, raising the workshop temperature by about 5°C (9°F).

Figures 4 and 5 show the measured temperatures and computed power during a cloudy, overcast winter day (outside temperatures of -7 to -1°C, or 19 to 30°F). The total energy produced this day was approximately 1.9 kWh, raising the workshop temperature by about 2°C (3.6°F).

Figure 4: Cold air inlet, hot air outlet, and ambient temperatures during an overcast winter day.


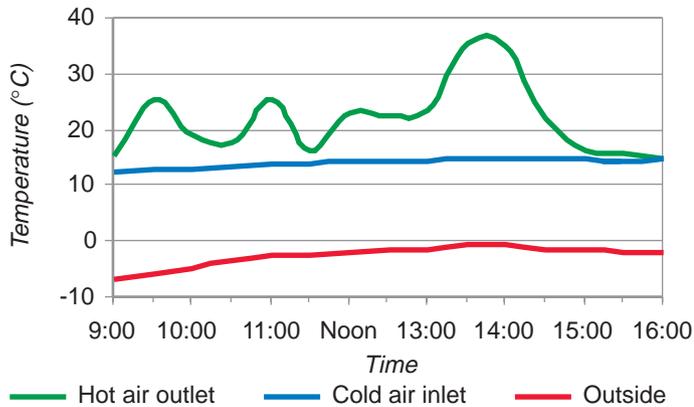


Figure 5: Energy produced during an overcast winter day.

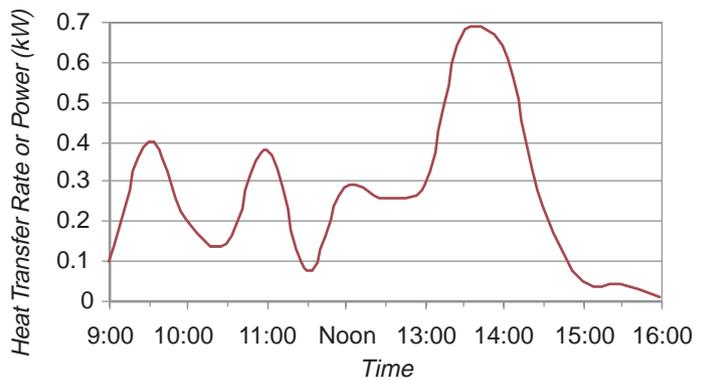

Fan Control Circuit

Temperature control of the system is provided by a simple differential temperature sensing circuit. This circuit automatically turns the air circulation fan on when the temperature of the air at the collector output is warmer than the temperature of the air at the collector input, and leaves the fan off otherwise. The temperature difference needs to be about 2°C (3.6°F) and can be calibrated through R1 (see schematic). The fan is turned on and off through a 30 mA maximum coil current relay.

This setup ensures that the fan and collector are only used to add heat to a room, not to remove it. Two thermistors are used for this purpose: one mounted close to the cold air collector input (TR1), and the other mounted inside the collector hot air output (TR2). The schematic of this circuit is shown below. All the parts to build it can be found at stores such as Radio Shack.

The circuit consumes approximately 24 mW in the *off* mode, and 720 mW in the *on* mode, and operates at 24 V. The AC fan consumes 14 W when operating. The relay could be used to control a DC-powered fan, if available. Simply replace the AC power source and the AC fan with a corresponding DC power source (battery) and a DC-powered fan.

Calibrate the circuit by adjusting R1 until the fan turns on when a warm finger is placed on TR2. Then it will typically turn the air circulation fan on during a sunny winter day around 9:00 AM, and turn it off around 4:30 PM. The circuit also turns the fan off and back on during and after prolonged cloud covers on overcast days. This happens when the temperature of the air at the collector output drops below the temperature of the air at the collector input plus 2°C (3.6°F). This happened at around 11:30 AM on the overcast day detailed in Figure 4.

Since the hot air outlet is about 50 cm (20 in) above the cold air inlet, a large enough temperature difference is present as soon as the sun begins to warm the collector, resulting in proper and automatic circuit operation. Such circuits are commercially available for liquid-based collector systems, and are called differential controls. In those systems, a circulating pump is typically controlled by the circuit.


A possible improvement to the circuit would be to add an automatic absolute temperature switch. This switch would

prevent the circuit from switching on when no heating is required because the room is already at the desired temperature. This feature would be helpful during warmer spring and summer days, when adding heat to a room would not be desirable. The present circuit needs to be manually unplugged at the beginning of spring and reconnected in the fall to achieve this operation.

Temperature Control Circuit Parts List

Qty	Description
1	7815 voltage regulator
1	LM324 operational amplifier
2	Thermistors (Radio Shack part number 275-248)
1	12 VDC relay, 30 mA max. coil current (Radio Shack part number 271-110)
2	30 KΩ resistors
1	5.1 KΩ resistor
1	10 KΩ adjustable potentiometer
1	100 μF capacitor
1	120 VAC muffin fan (or DC-powered, depending on the available power source)
1	Small circuit board
Miscellaneous parts: wires, solder, connectors, etc.	

Temperature Control Circuit Schematic

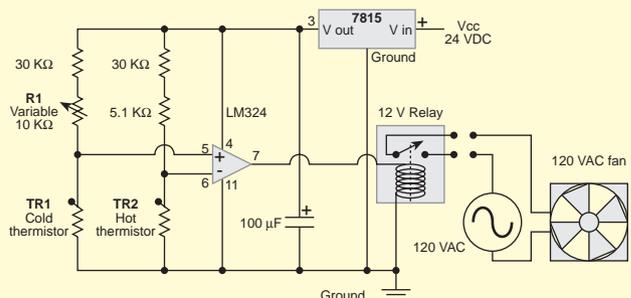

During the winter months, the basement workshop temperature hovers around 11°C (52°F). The installed collector is able to raise this temperature as much as 6°C (11°F) during sunny days. This results in a comfortable working temperature around 17°C (63°F).

The largest temperature difference measured to date between the air inlet and air outlet has been 45°C (81°F). This corresponds to a maximum efficiency of approximately 50 percent ($114 \text{ kg/h} \times 1.007 \text{ kJ/kg } ^\circ\text{K} \times 45^\circ\text{K} \div 3.6 \times 10^3 \text{ kWh/J} \div 2.9 \text{ kW} \times 100\% = 50\%$). Even though this efficiency is respectable, the single glazing/dead air space collectors are supposed to be between 60 and 70 percent efficient. Currently, I am attributing the loss in efficiency to the long flexible ducts connecting the collector to the basement.

Typical temperature differences between the air inlet and air outlet are below 40°C (72°F). This seems to indicate that the fan that I am currently using in my system is pushing close to the right amount of air through the collector. But the maximum measured efficiency of this system at 50 percent is still below the 60 to 70 percent specified for these solar collectors. So I will be conducting measurements with higher-capacity fans and blowers to determine their effect on system efficiency. These experiments will have to wait until next winter.

Rewards

It is satisfying to feel the hot air streaming out of the hot air outlet during collector operation. It is also rewarding to be able to work in a warmer workshop, knowing that it is heated by the sun. I am assuming that we are lowering house heating costs indirectly by some small amount through workshop heating.

From a purely financial viewpoint, the savings are small. We currently heat our home with propane during the winter. One gallon of propane contains 90,000 BTUs, approximately 70 percent of which can be extracted in the form of heat. Furthermore, it takes approximately 3,410 BTUs to generate 1 kWh of energy. This means that 1 gallon (3.8 l) of propane can generate approximately 18 kWh of energy.

Remember that the described system generated 6 kWh during a nice sunny winter day, or the equivalent of 1/3 of a gallon (1.3 l) of propane. At current propane prices of US\$0.80 per gallon, this amounts to savings of 27 cents per day in the best case! Such calculations are somewhat depressing, but it is important to keep the bigger picture in mind. This picture includes less reliance on fossil fuels, a reduction in atmospheric emissions, a positive feeling of independence, and great hands-on learning experiences!

My system is able to increase the basement workshop temperature as much as 6°C (11°F) during sunny winter days. It was easy to install, and coupled with the automatic temperature/fan control circuit, operates unattended. I measured its operating efficiency to be approximately 50 percent. While realized savings in heating fuel costs are small, I enjoyed installing this system and am happy knowing that my family has decreased its reliance on fossil fuels just a bit more. I am now tempted to explore the capabilities of solar hot air collectors for water heating, but that will have to wait!

Access

Author: Ralf Seip, 5020 Granger Rd., Oxford, MI 48371
248-969-5845 • poiypoi@flash.net

AAA Solar Supply Inc., 2021 Zearing NW, Albuquerque, NM 87104 • 800-245-0311 or 505-243-4900
Fax: 505-243-0885 • debbie@aaasolar.com
www.aaasolar.com

Radio Shack, 100 Throckmorton St., Fort Worth, TX 76102 • 800-843-7422 or 817-415-3011
Fax: 817-415-3240 • support@tandy.com
www.radioshack.com



New England

S O L A R H O M E S TM

Solar Farmhouse II TM

Standard Features
of a New England Solar Home

- Generous unobstructed south-facing roof area
- Passive solar configuration w/ deep roof overhangs
- Open light-filled interiors
- Standard & Custom Plans can be quoted for shipments of stress skin panel or pre-fab homes

Plan Set Options:

- 1 Standard Plans
- 2 Std. Plans Customized
- 3 Full Custom

Call or write for price list.

Energy Self-Reliance

Suddenly Got a Lot More Attainable

All Climates/ Solar Home Design Company

For our free brochure contact us at:

New England Solar Homes

5 Jean Road
Arlington, MA 02474

Tel 782 646 6165 **Fax** 781 646 6188

Email solarhomes@ecobuild.com **Web** www.ecobuild.com

“When Hurricane Georges hit Puerto Rico, Two Seas’ mount saved our PV system from disaster.”

- Capt. Denis Martinez, U.S. National Guard

{ 98% shipped in 24 hours }

**Mounts that exceed toughest U.S. hurricane codes,*
backed by our 20-Year warranty.**



Mounts, battery enclosures, and racks available in a wide selection of models to meet any requirement.



Two Seas Metalworks

Willits, CA 95490 USA

800-227-9523

www.2seas.com




*SBC-1606 (110 mph winds). Two Seas mounts rated for 125 mph winds.




BP SOLAR

$$\cancel{E=MC^2}$$

PV+WIND=ENHANCED POWER SYSTEMS

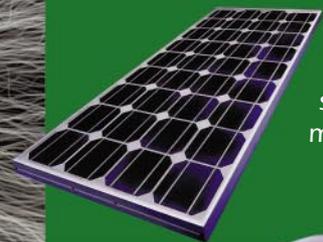

State of the art solar modules

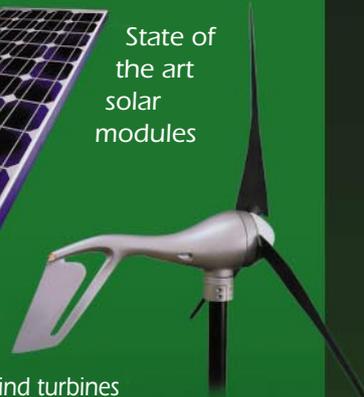

A new generation of battery charging wind turbines

Complement your Solar Power System with clean energy from the wind. For a Power Specialist near you, call us at 1-888-BP4-SOLAR (1-888-274-7652). Business opportunities are now available!



BP SOLAR

Southwest Windpower
INCORPORATED
RENEWABLE ENERGY PRODUCTS

Takin' It to the People:

The Education Station

Scott Ely
©1999 Scott Ely

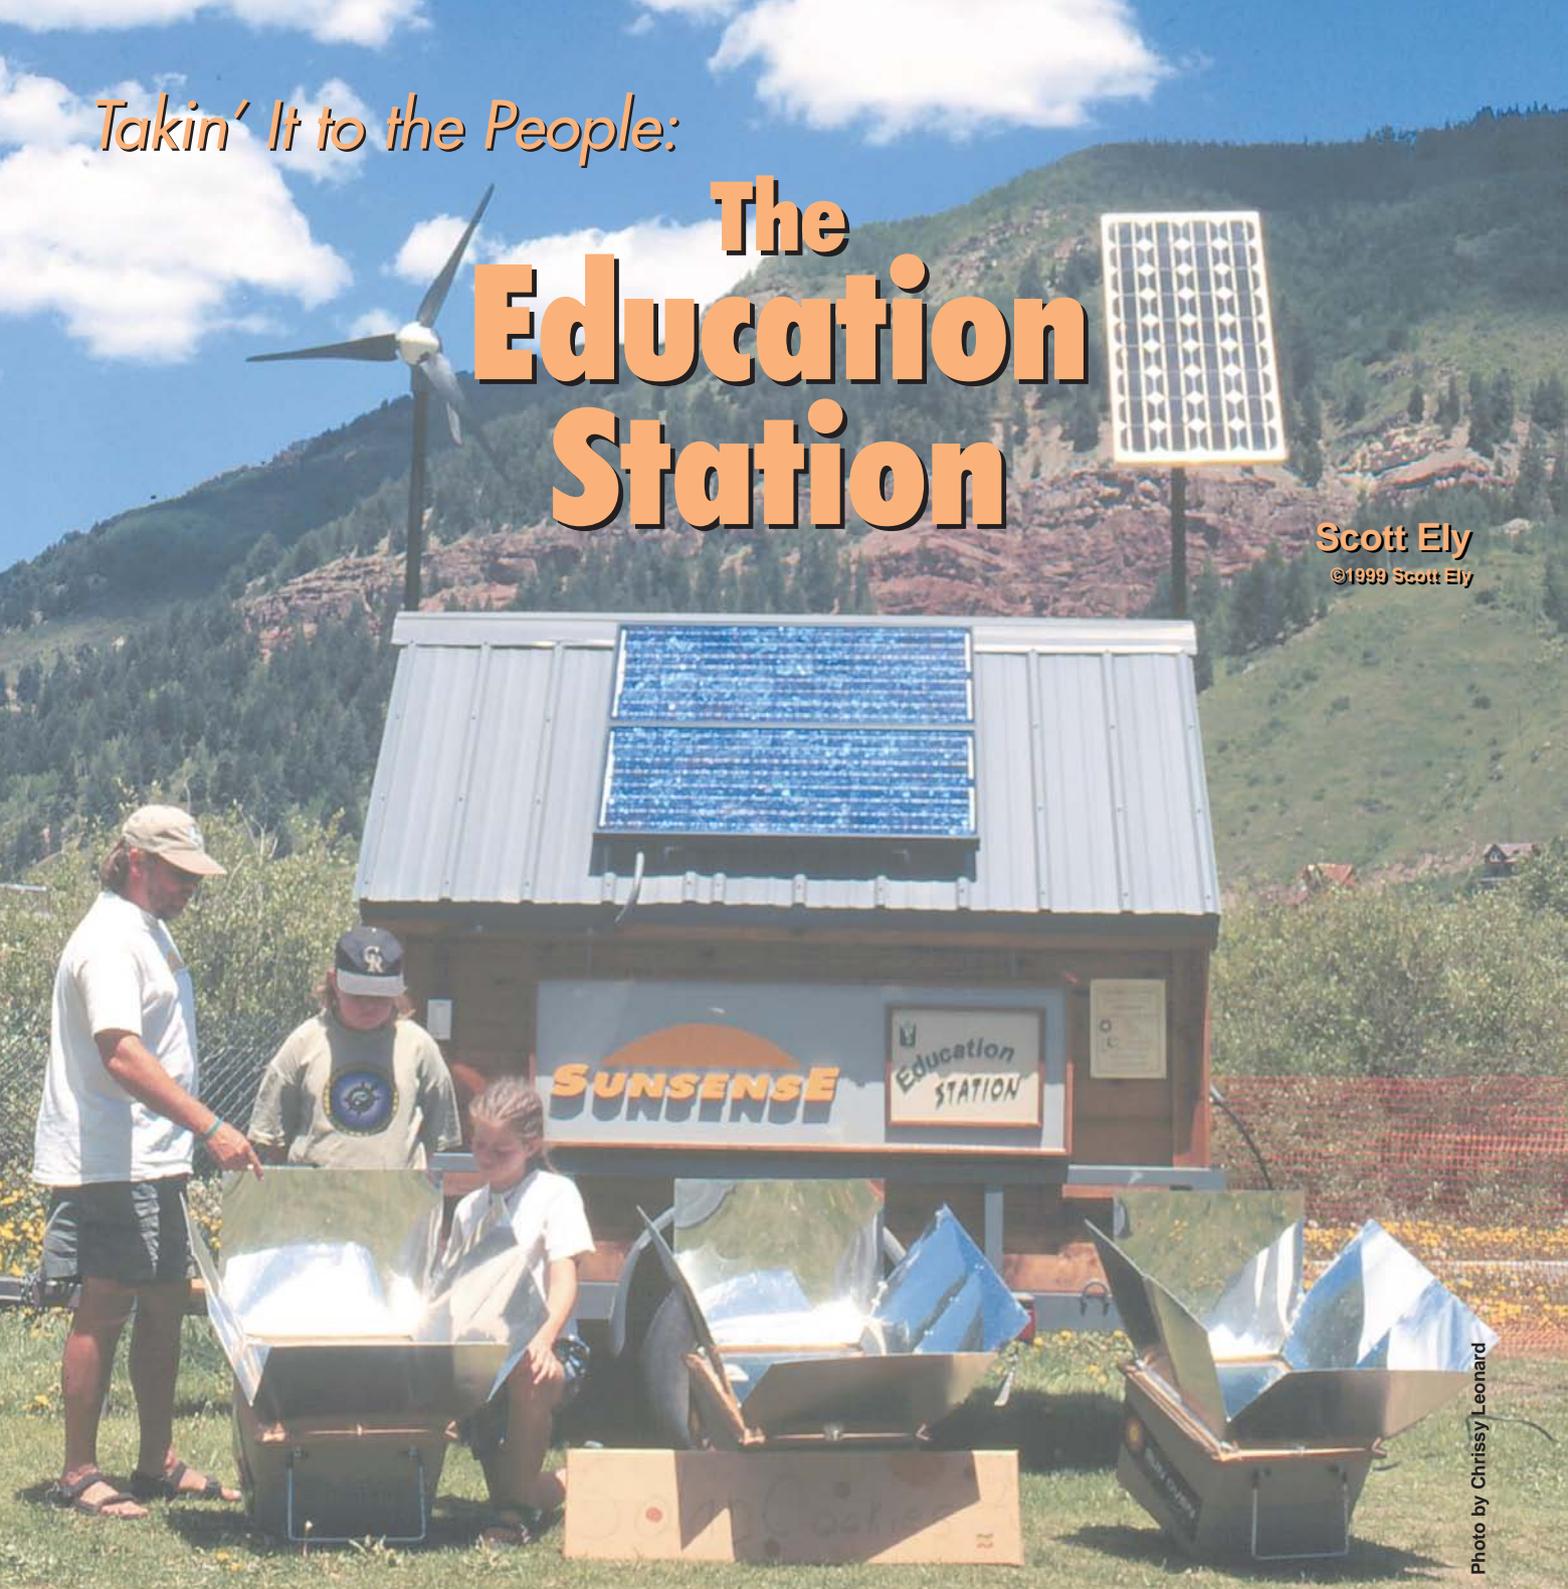


Photo by Chrissy Leonard

Scott Ely and future renewable energy supporters check out the E-Station.


Renewables are catching on! Everywhere we look there are signs of renewable energy (RE) becoming a mainstream technology. But believe it or not, there are still people out there who are totally unaware of renewable technologies. Perhaps they have been living in a cave, work in the fossil fuel business, or simply are not interested. Whatever the reason, RE *education* continues to present challenges for the industry and the public at large.

Owning an RE business immediately opened my eyes to the importance of education. Or perhaps my father, a professor, passed on the teaching gene to his son. Whatever the reason, it is clear to me that people who are well informed can better identify their needs, and develop a common sense game plan to address those needs. And if practiced throughout a population, education rewards people with a happier, healthier environment in which to grow and prosper.

I began to realize the importance of RE education back in 1990 while traversing the western slope of Colorado seeking out potential customers for my fledgling solar electric business, Sunsense. It seemed as though the opportunities were there, but the knowledge and familiarity with renewables was lacking.

So I tried to include some kind of RE display or demonstration in every business (and personal) activity. The Sunsense office was retrofitted with a solar electric system. I designed and built a small “power box” for providing electricity at the job site, using solar power to install solar power. We could also use the power box at various other functions for

E-Station’s vented battery box holds four Trojan T-105 lead-acid batteries.

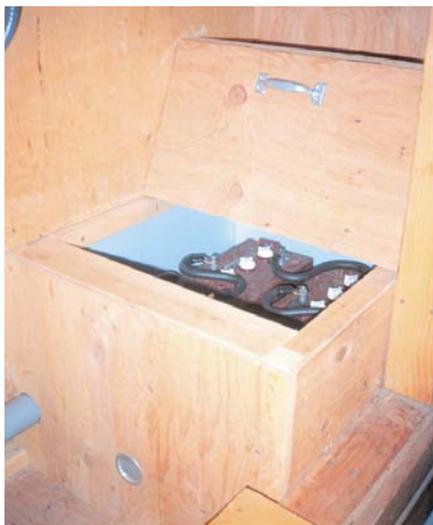

The E-Station’s control board slides out to become an indoor display in winter.

powering blenders, music, lighting, etc.

Then it hit me. Wouldn’t it be nice if I could take renewable energy technology to the people rather than asking them to come to me? Fairs, festivals, workshops, seminars—any event could serve as a platform for the further education of the public about renewable technologies. Enter the idea for the mobile renewable energy education demonstration trailer—the Education Station, or E-Station. From PV and wind power to solar cooking, AC compact fluorescents, and even a solar powered bubble machine for the kids, the Education Station has been providing the public with a working demonstration of renewables for almost five years.

The current E-Station and its “offspring” are the result of an evolutionary process. From a simple, sales-driven RE demonstration to a sleek, stand-alone showpiece, the E-Station continues to evolve and expand. The original idea has blossomed into a new challenge—to design and build a fleet of portable

RE education trailers, one for every region of the country.

Phase One—From Mind to Matter

The original intent of the Education Station was primarily as a marketing tool. In the early years (1990-93) of Sunsense, I would visit a potential client armed with a couple of different solar panels, a charge controller, an inverter, and even a battery or two. I wanted people to see the equipment, touch it, and get an idea of how it goes together. I also brought photos of completed installations. This approach was very effective, but the people being enlightened to the wonders of solar electricity and renewables were the people who already had an application in mind, and consequently had a genuine interest in the technology. I needed to figure out how to reach the average person.

Investing in a demonstration system seemed like a good idea. I had experimented with various displays and demos at energy fairs and festivals in the past—portable power box systems, water pumping

displays, even a Sun Frost freezer loaded with Ben & Jerry's Brownie Bars! All were fun learning tools and helped to get solar and renewables in front of people. The best, however, had yet to be built.

The first E-Station was born in 1994, and was designed to look like a house. The building sat on a utility trailer and had a sturdy floor, cedar siding, 2 x 6 rafters, and a metal roof. The entire structure was designed to be removable in order to utilize the trailer for other functions. Forklift access was designed into the floor system for easy loading and unloading. Two swing-out doors exposed the control board and battery box. Another access door on one side allowed the control board to slide in and out.

The control board featured a Trace 4 KW sine wave inverter and the corresponding APT power center. Four Solarex PV panels were roof-mounted and designed to charge eight Trojan golf cart batteries. All this on a five by eight foot (1.5 x 2.4 m) trailer rated at one ton (907 kg). What a load!

That first version of the E-Station made many stops around western Colorado, including visits to energy fairs, the Telluride Bluegrass Festival, our own Carbondale Mountain Fair, and numerous Solar Energy International classes. We could power up sound systems, tools, kitchen appliances, and security lighting. Perhaps the most fun was driving down the highway and having people pass the rig with thumbs up and heads bobbing spirited approval.

The initial success of the E-Station was just the beginning. With new RE products and concepts being introduced almost monthly, it was time to expand! The 1995 edition featured the addition of an AIR 303 wind turbine, an upgraded APT power center, and some new signage.

As the road show continued, I really felt that I was reaching people. The entire trailer made folks curious. Most people had either seen solar panels in high-profile applications (highway construction warning lights, billboard lighting, roadside weather stations, etc.) or they knew someone who had installed a system on a cabin or RV. They wanted to know more about how solar panels produce power and what other applications exist.

We helped people with everything from the correct pronunciation of "photovoltaics" to identifying the various components in a typical system. We helped to clarify concepts such as the flow of electrons from solar panels through controls to the batteries and the subsequent transformation of DC to AC power through the inverter to the AC loads.

The wind turbine was another big draw. People noticed the turbine spinning away and wanted to know how much power it was producing and the associated cost. Metering inside the E-Station showed the current being generated by either the solar panels or the wind turbine or both! We handed out product literature and made recommendations on local contractors proficient in renewables.

With all this interest in solar and renewables, I felt we needed to expand yet again. There were questions regarding other RE technologies and applications such as water pumping, microhydro, and solar cooking. We also wanted to include some fun things for the kids.

The problem with this expansion was the inherent weight of the E-Station. With a solid structural framework and a typical RE system design (a fairly large solar array, battery bank, and 4,000 watt inverter), the E-Station was simply too heavy! How could we add more systems and get the weight under control?

Phase Two—A Lean, Mean Learning Machine

Those early years helped me realize that while the first version of the Education Station was effective, it was embryonic compared to its potential. A new E-Station needed to be built with the focus on education, instead of sales. The first order of business was a form of "lumber liposuction." We had to trim the fat in order to add more systems.

This second edition of the E-Station incorporated many of the original ideas. With design and building assistance from Mark Wolfe Webber of Wolfe Brand Construction in Carbondale, we created a lighter building with numerous attachments for various system displays.

The floor was still structurally sound. We kept the access slots for forklifting. Mark was able to locate some scrap cedar siding which we recycled into the building. The rafters and wall studs were downsized to two by fours, recycled where possible. The new access door was a lift-up section, providing shade and shelter from the weather. The overall dimensions decreased and the power system sizing was adjusted. All the components could be stored inside the structure for easier transport and the overall weight was still less than the original!

The PV system for this reincarnated E-Station included two Solarex panels (again roof-mounted), four Trojan golf cart batteries, the Trace 2.5 KW sine wave inverter and corresponding APT power center, and the AIR 303 wind turbine. One Siemens SP75 panel was top-of-pole mounted opposite the wind turbine to operate a water pumping demo.

Peripheral displays included a Burns-Milwaukee Sun Oven for solar cooking, and at some events the solar-powered bubble machine (special thanks to Ed Eaton at SEI). In addition, we had weathertight AC and DC receptacles available on the outside of the structure. Inside, we featured a comparative display of incandescent versus compact fluorescent lighting.

Armed with this high-performance mobile education unit, we again hit the road in the Summer of '96. The upgraded E-Station could now demonstrate more technologies to an ever-expanding group of people. The finely crafted structure was attractive by itself, but with the wind turbine cruising, water flowing from the solar pumping system, and the smell of fresh-baked cookies in the air, you can imagine the response!


Many of the people would stop for the same reasons as before—curiosity, basic information, even some RE techies with problems to solve. Some of the same people would return to report on their own system progress or to get updated information. And the kids loved it! They would watch and smell the cookies baking (usually standing directly in front of the oven) and chase the solar bubbles.

Some kids would even listen in on the conversations with their parents regarding renewables and the local political/social views on the subject. And perhaps the best part of it all was the genuine “Thank you!” we received from nearly every patron. The E-Station was pulling its weight!

Phase Three—Stand-Alone Mania!

The following year (1997) the Education Station continued to perform, energizing many of the same functions as in years past. In addition to these events, we added a natural homebuilding workshop and our Carbondale Fourth of July “Solar Potluck.” All were great fun and the public interest continued to grow. I found myself working from sunup to sundown answering questions and demonstrating system operation. People would start asking questions before the entire display was even together!

Demonstrations included showing people the volt and amp meters as the solar panels and wind turbine would charge the batteries. We would shade the solar panel supplying power directly to the water pump and watch

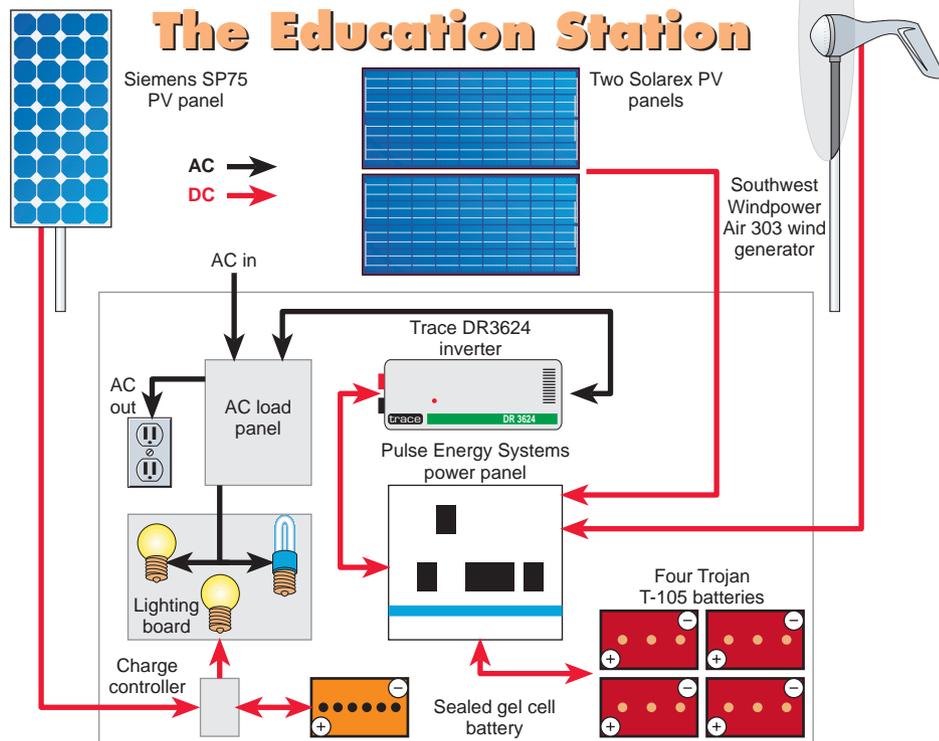

the water stream slow down, then speed up again when unshaded. We could watch the meters with a load turned on and see the power draw, or we could show the difference in power consumption between the compact fluorescent and incandescent lights. We would also show people the basics of programming a Trace sine wave inverter. Great stuff, but exhausting!

Phase three has changed the E-Station in a number of ways. The two Solarex modules remain on the roof connected to the four Trojan T-105s. The APT power center has been replaced by a Pulse Energy Systems PSC series power center, and the Trace SW inverter has given way to the lighter and more compact Trace DR3624. The AIR 303 still assists with the charging and the comparative lighting board still exists. The single Siemens SP75 now charges a 12 volt gel cell battery and demonstrates a straight 12 VDC system. In sticking with the original theme, we can now show people roof mount vs pole mount, polycrystalline vs single crystal panels, flooded vs gel cell batteries, and 12 and 24 VDC vs 120 VAC power. A lot of information in a relatively small package!

Growing Wings

In addition to these basic system changes, documentation has been upgraded. The Education Station has grown “wings.” These wings are wooden placards displaying information on the E-Station itself along with basic PV information and photos of actual installations.

The “information wing” includes a system schematic for the E-Station; an explanation of system operation, components, and concepts; and a Q&A section. The “photo wing” contains a photo display of various strategies for PV mounting, battery boxes, controls, inverters, and complete system layout. The idea, of course, is to allow people to look at the information and the components without any pressure.

Most folks (myself included) tend to drift away from displays where someone is ready to jump into a long-winded explanation or sales pitch. The wings provide a user-friendly approach where people can relax and take in as much as they want. Should questions arise, they can read through some of the information and look at the photos until someone is free to speak with them.

The other major upgrade to the current E-Station is the addition of stand-alone satellite displays. Still in the development stage, these displays are designed to provide additional information on other RE technologies and applications.

Each stand-alone display has a base structure on which system components are mounted. Again, we have employed the “wing” strategy to display information. The wings are attached to the sides and fold up for storage and transport. Speaking of transport, some parts of these satellite displays can fit inside the storage area of the E-Station, while the rest of the parts must ride in the back of the truck that is towing the trailer. Each peripheral display is reassembled on site and stands close to the E-Station.

People can work their way around each display and the E-Station at their leisure. We have developed one display each for solar cooking (rotating base, storage, and info wings), solar water pumping (support structure, acrylic tube, sub pump, panels on tracker, and info wings), and microhydro (turbine, “dummy” batteries, diversion load, penstock, and info wings). These peripheral displays allow the entire package to be spread out so that more people can participate.

What Price Education?

The Education Station has been through many changes, and changes often cost money. New, upgraded components and expanding system demonstrations have increased design, installation, and presentation costs over the years. So how much for one of these beauties?

The cost of the first version of the E-Station was about US\$8,500. Today, with the peripheral displays, etc., the cost is closer to US\$12,000. These figures are for the materials and equipment; not included are the countless hours of design and construction. But don't

be deceived by the price tag. Much of the design and installation of these systems has been accomplished through class projects at Solar Energy International. So the Education Station begins educating right from the get-go.

The trailer, still in use today, doubles as a snowmobile trailer in the winter when the E-Station is in hibernation. The trailer is also available for helping deliver equipment to job sites for SunSense. The slide-in control board comes out in the winter and serves as a nice indoor display at the SunSense showroom. The forklift access allows us to lift the entire structure off the trailer and set it on pallets for the winter.

In addition, each system upgrade or expansion frees up the old equipment for use in other demonstration projects, or it becomes available for sale. Since we use standard rather than custom equipment, resale is not a problem. These multipurpose tasks and recycling of system components make for a very cost-effective package.

Someone once said, “If you think education is expensive, try ignorance.” Spending little or no money on RE education fosters the apathetic mindset which has the potential to slowly erode the planet. Remember that this system—this teaching tool—is an investment. The longer we wait to spread the word about renewables and resource efficiency, the harder our recovery from the consequences.

E-Station—The Next Generation

As the renewable energy and sustainable technology markets heat up, the need for reliable information and education is reaching a critical stage. I've seen the Education Station through its metamorphosis. Now I feel the need to progress even further in educating and interacting with the public regarding renewables and other resource efficient technologies.

The Education Station and its satellite systems will carry on the mission of public education. With this in mind, we are investigating the formation of a non-profit educational branch of SunSense. This non-profit entity would devote its time, money, and energy to continuing this effort. The Education Station would become the flagship for delivering the resource efficiency message.

The precedent has been set and the future looks bright. We encourage teachers, administrators, city/county/state officials, and others to get involved in the design and building of their own renewable energy demonstrations using any and all resources. The industry and the public are listening!

Access

Author: Scott Ely, SunSense, PO Box 301, Carbondale,

CO 81623 • 970-928-9272 • Fax: 970-928-9696
 sunsense@sopris.net

Solar Energy International, PO Box 715, Carbondale,
 CO 81623 • 970-963-8855 • Fax: 970-963-8866
 sei@solarenergy.org • www.solarenergy.org

Mark Wolfe Webber, Wolfe Brand Construction,
 PO Box 986, Carbondale, CO 81623 • 970-963-1302
 Fax: 970-963-6163 • annmark@sopris.net



Photons In, Photons Out
Solar Rechargeable Lamp



- Quality Antique Brass
- Bright White LEDs
- NiMH Batteries
- 90 Day Warranty

See web page for details:
www.photonlamp.com

Backwards to the Future, Ltd.
 PO Box 409, Fenntville, MI 49408
 Fax: 616-236-6186
 email: sales@photonlamp.com

SOLAR PANELS

CANROM-7(7Wp)	\$ 78.00
CANROM-20	\$ 132.00
CANROM-40	\$ 268.00
CANROM-50	\$ 329.00

CANROM-65 ... \$343.00

CANROM-75	\$ 460.00
CANROM-S1*	\$ 706.00
CANROM-S2**	\$ 1,199.00

* **Canrom-S1** is a kit containing two Canrom-40 panels, an 8 Amp voltage regulator, aluminum mount with three inclination positions, 60 feet of gauge 10 cable, fuse box on the panel side of battery, and complete installation instructions.

** **Canrom-S2** contain four Canrom-40 panels, a 12 Amp voltage regulator, aluminum mount with three inclination positions, 60 feet of gauge 10 cable, fuse box on the panel side of battery, and complete installation instructions.

CANROM Photovoltaics, Inc.
 Call or fax for a free catalog: 716-282-2975
 or email using : www.canrom.com



**LOOKING FOR
 1000+ AH?**

Now Shipping!
 4-KS-21PS
 1104AH (20 hour rate)
 15 3/4 (L) X 9 3/4 (W) X 24 3/4 (H)
 230 lbs (wet), 186 lbs (dry)

INTRODUCING... THE NEW 4-KS-21PS

- New Generation Dual-Container Modular Design
- 3300 Cycles to 50%DOD.
- Fewer or No Parallel Strings
- Fewer Cells
- Less Maintenance
- Elimination of Stray Current
- Greater Charging Efficiency
- Available Wet or Dry Charged
- 10 Year Warranty




Surrette Battery Company, Ltd.

1-800-681-9914
sales@rollsbattery.com

Rolls
 Battery Engineering

Why Buy All This Stuff?

To make the world's most advanced battery charger, you could buy a computer, software, battery charger, relays, wire and the rest. But why buy all this stuff? The Power Advantage 30 Battery Charger has it all in one low cost package!

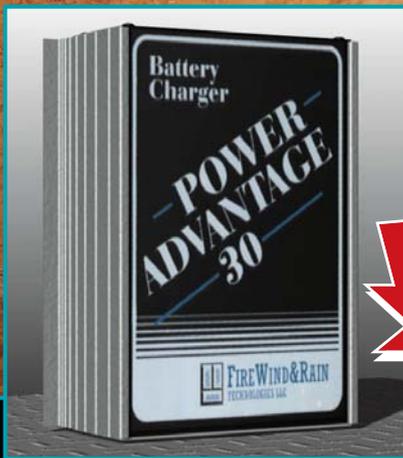


Get
25% More
Power!



Power Advantage 30 features include...

- **Maximum power tracking:** Continuously adjusts current from solar panels as it transforms voltage, allowing it to seek the precise point where maximum power is available. This produces 25% more power than conventional models.
- **3 charging modes:** Bulk charge, constant voltage and equalize.
- **Tracks power you produced and used, battery condition, and battery life based on present load.**
- **Flash memory stores 45 days of data which can be accessed from a PC or modem.**
- **Enables importing data onto a spreadsheet for further analysis.**
- **Available in 24 and 48 volt models with up to 1500 watts of power.**
- **Optional LCD enables continuous system monitoring without a PC.**

For more information contact us or the Dealer in your area. Then you won't need to buy all this stuff!



FIREWIND&RAIN
TECHNOLOGIES LLC

3920 East Huntington Drive, Flagstaff, AZ 86004
(800) 588-9816 • (520) 526-1133 • Fax (520) 527-4664
www.firewindandrain.com

SOLAREX

full page

four color on negatives

this is page 49

Midwest Renewable Energy Fair 1999

It was a party indeed! Folks came from every state in the USA, and from many foreign countries. Over 11,000 of us spent June 18–20 in Amherst, Wisconsin attending the tenth anniversary of the best renewable energy extravaganza in the known universe.

This was the biggest MREF in history—more attendees, more RE businesses displaying their products, more workshops, and best of all, more fun. This year's keynote speaker, Alan Weisman, author of *Gaviotas*, gave a presentation to a packed house of over 2,000 people. Three days of non-stop RE talk filled us up with new information and perspective from old and new friends in the industry. Naughty solar guerrillas even hoisted their flag on the main wind genny's tower. Don't ask us who they were—we can't say....



Jeff Green of IRENEW



Blown away at MREF



Kelly Larson discovers cob

If you were lucky enough to attend the festivities at MREF '99, then we hope these pictures will bring back wonderful memories of the fine time we all had. If you missed this fair, then let these pictures encourage you to attend next year. At ten years old, MREF is just hitting its stride!



Where to?


Chris Molello with goodies



Hoisting the Colors




Skip Goebel gets steamed

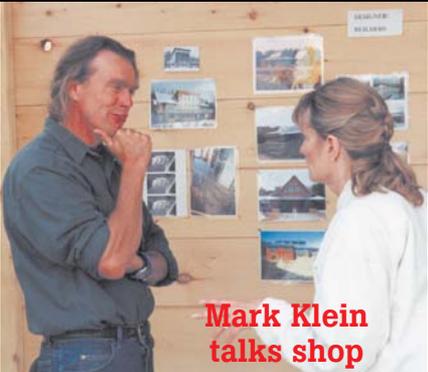

Mark Klein talks shop

Cordwood construction in progress

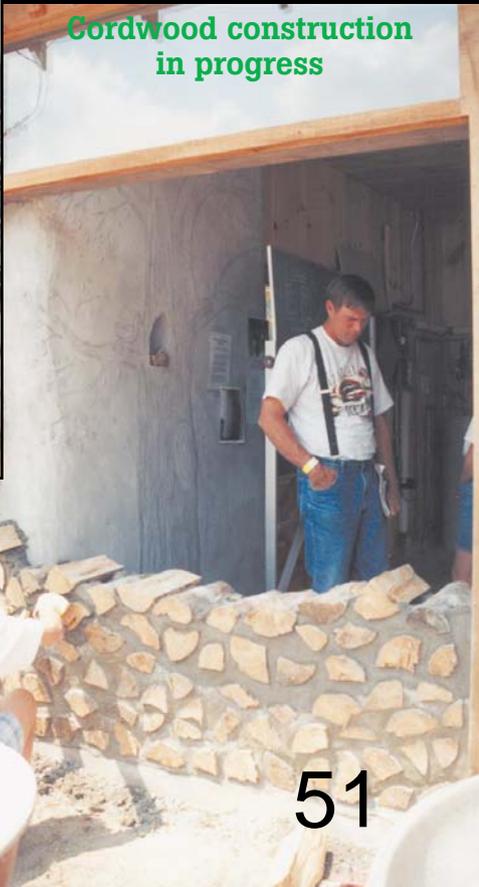


Model Home—a hands-on showcase



**Alan Weisman
and Windy Dankoff**



Photos by Joy Anderson, Ben Root, Dan Lepinski, and Richard Perez

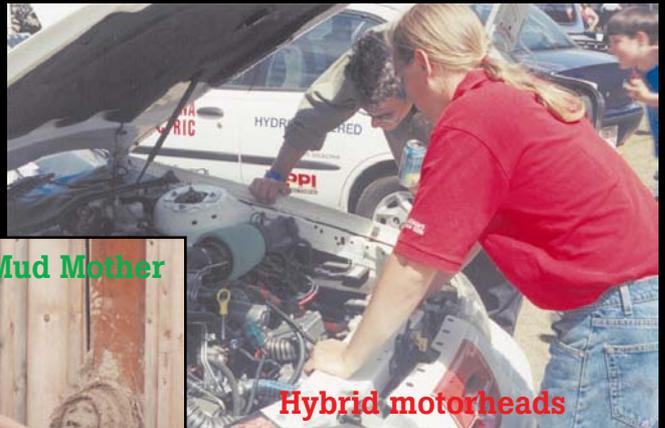

Hybrid motorheads

Conjuring the Mud Mother



**Solar transportation
engineers**

**The Midwest
Renewable Energy
Association,
POB 249, Amherst, WI
54406 • 715-592-6595
Fax: 715-592-6596
mreainfo@wi-net.com
www.the-mrea.org**



Electric rod

**FOR EVEN THE MOST
REMOTE APPLICATIONS
TRUE SINE WAVE POWER INVERTERS**

XP125 (125 WATTS) \$225.00

XP250 (250 WATTS) \$425.00

XP600 (600 WATTS) \$625.00

XP1100 (1100 WATTS) \$748.00

All inverters are priced as 12vdc to 115vac 60Hz

**SAW YOU AT THE
MIDWEST RENEWABLE
ENERGY FAIR!**

EXELTECH

2225 E. Loop 820 N. Fort Worth, Texas 76118-7101
voice: 817.595.4969 fax: 817.595.1290 toll free: 800.886.4683
web site: www.exeltech.com e-mail: info@exeltech.com

And when it comes to fighting air pollution, it's as simple as changing the kind of electricity you buy.

What's electricity got to do with protecting the planet? Plenty. Especially since making electricity causes more air pollution than any other industry. But now you can help change that.

You have the power to turn things around.

Thanks to our customers at Green Mountain Energy, a service of GreenMountain.com, three new wind turbines have been built in California. And that's just the beginning.

To celebrate, we've just launched a new electricity blend called Wind for the Future.^{20sm} Plus, we're introducing a new lower-priced blend called 100% Renewable Power.²⁰

The choice is yours. You can be part of the problem by continuing to buy power that helps cause air pollution. Or you can help turn things around. Now it's as easy as choosing electricity from Green Mountain Energy.

WHEN YOU SIGN UP, WE'LL DONATE
\$35 TO THE REDWOOD ALLIANCE.*

CALL US TODAY!

WE'RE AT 1-888-246-6730
OR greenmountain.com.

Mention Code: C029



Green Mountain Energysm

a service of greenmountain.com

Choose wisely. It's a small planet.sm




You'll have the same reliable electric service you've always had. If you're not completely satisfied, we'll switch you back at no cost. *Offer expires August 31, 1999 unless terminated earlier and may not be combined with any other offer. Certain restrictions may apply. Call for details. California PUC Registration #: 1007 © 1999 Green Mountain Energy

The Little Pump that Can!

Al Latham

©1999 Al Latham

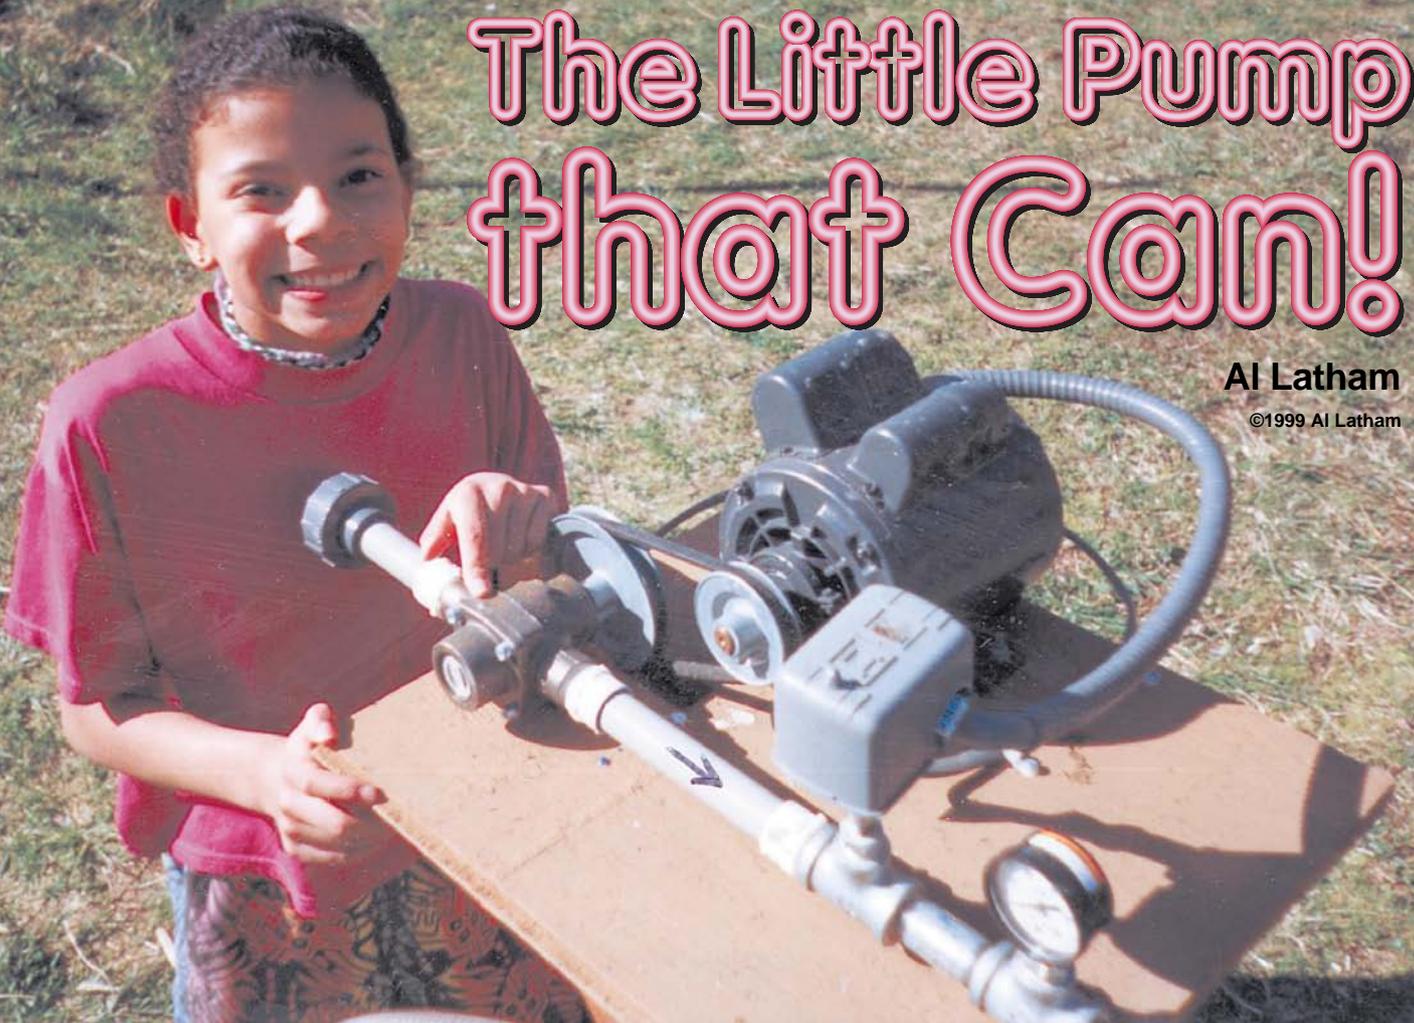

Assistant Irrigation Engineer, Elena, with the home-built surface pump that can provide 6 gpm at 30 plus psi.

For years we had been using a gasoline-powered pump to irrigate the garden. Pumping enough water with our solar electricity had been a fantasy for years, but was not a high priority out here on the trailing edge of technology, as long as the gas engine would start. When the gas engine finally breathed its last, the solar-powered irrigation pump project jumped high enough on the list to get attention.

Our 12 foot (3.7 m) deep well is down in the trees, 400 feet (122 m) away and 12 feet (3.7 m) lower than the garden, solar panels, and battery bank. Water level in the old well fluctuates from ground level to negative 10 feet (-3 m). There was a good water distribution system of 1 1/2 inch (38 mm) pipe set up for the existing (er, now non-existing) gas pump.

The Problem and the Choices

We ran 120 VAC power from the Powerstar 1,300 watt inverter down to the well with #10 (5.3 mm²) wire. It runs a Flowjet diaphragm pump, which fills the household cistern. We put in another run of #10 wire for the irrigation project because it was cheap and available. Trying to figure out how to run both pumps on one wire run—one on a float switch and one on a manual switch—was too much for me. The challenge was to find an irrigation pump that would run off a 1,300 watt inverter and 400 feet (122 m) of #10 wire, providing at least 4 to 5 gallons per minute (15–19 lpm) at 30 psi to the garden.

Our first option was to use another Flowjet pump to water the garden, since the one filling the cistern worked so well. But we wanted to run a drip irrigation system at 20 to 30 psi, which is beyond the power of the valiant Flowjet, I was told. Though it would pump water that far, it wouldn't pressurize. But I had to try it anyway and was amazed at how hot a little electric motor could become when asked to do more than it should!

Our second option was to get a bigger cistern and use gravity flow, or another booster pump to water the garden. But cisterns are expensive, and they become another maintenance chore.

Our third option was to buy a pump from one of the many fine dealers who advertise in *Home Power* magazine, but there didn't seem to be one that would fit our criteria. We needed something that would run off the 1,300 watt inverter, pump the slightly less than perfectly clean water from the well and/or nearby pond, and still be in our price range (as cheap as possible).


Our fourth option was to try to cobble up something myself, and that's what I did.

The Right Pump

Searching through the multitude of catalogs on hand, I came across a Hypro 4001N "roller pump" for US\$114.75 in the Surplus Center catalog. The cast iron model is probably cheaper than mine, which has a Ni-Resist body, but I couldn't find one. The pump is designed for agricultural and industrial spraying and transfer of a variety of fluids. It was just right for the quality of water being pumped, and could provide 4 to 5 gallons (15–19 l) per minute with a 1/4 horsepower (hp) motor.

According to the literature that comes with these pumps, the rotary action principle requires no check valves while providing positive displacement characteristics. The pumps are rated at 100 psi for continuous operation. They are available with cast iron, Ni-Resist, or SilverCast™ body and rotor, 416 stainless steel shaft, sealed factory-lubricated bearings, and cartridge-type lip seals of Viton, Buna-N, or leather. The

Hypro 4001N Pressure vs Horsepower

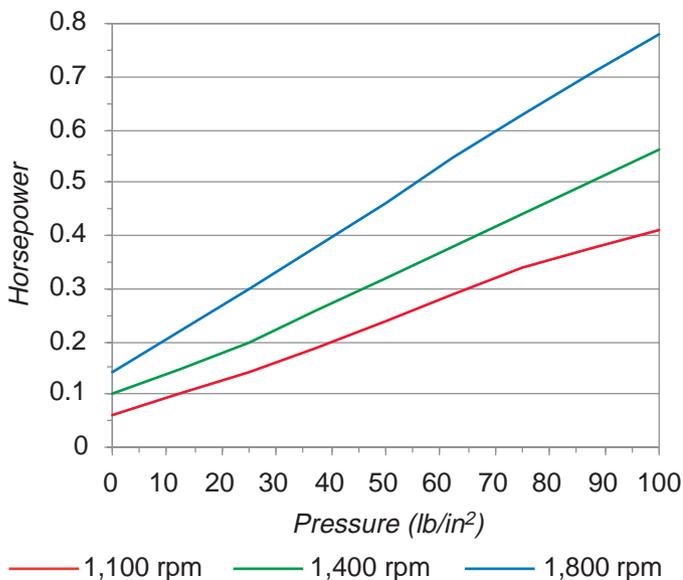

Graph extrapolated from Hypro pump performance table.

pumps also have versatile Super Rollers, which have the life of polypropylene and the chemical resistance of nylon.

These pumps are primarily used for livestock spraying, fertilizer application, and weed and pest control. They can pump wettable powders, light oils, aromatic solvents, etc. It seemed to me that if they would pump that stuff, they ought to be able to pump water. These pumps are also rebuildable, and the information that comes with the pump provides detailed instructions for repairs and rebuilds. For a good primer on pumps, see *A Graphic Guide to Water Pumping*, by Windy Dankoff, in *HP46*.

And Now For a Motor

I next consulted the bible of component put-togetherers—the Grainger catalog. This resulted in an initial exclamation of “Woe is me!” (or words to that effect) when I saw how many amps a typical electric motor required. Five to six amps (full load) was the rating for typical 1/4 hp, 1,725 rpm motors. But the starting surge is considerably greater, and it would be much more than our 1,300 watt inverter could handle.

The pump, motor, and pressure switch assembly.



But Grainger also listed high efficiency capacitor-start motors for just a few dollars more. The 1/4 hp high efficiency motor (#4K700) has a measly 2.8 amp full load rating and cost US\$118, only US\$9 more than a normal watt guzzler! Huzzah! A motor that would run off the 1,300 watt inverter, 400 feet (122 m) of #10 (5.3 mm²) wire, and a pump that would water the garden. Enough to make a solar nerd get weak in the knees....

Parts List

Description	Source	Cost
Hypro 4001N roller pump	Surplus Center	\$115.00
1/4 hp high-efficiency capacitor-start AC motor	Grainger	\$118.00
3 inch pulley	Hardware store	\$2.85
4.5 inch pulley	Hardware store	\$4.35
V-belt	Hardware store	\$2.85
Precharged water pressure tank	Used	\$15.00
Pressure switch	Hardware store	\$15.00
"Y" type drip irrigation filter w/ 150 mesh screen	Hardware store	\$20.00
Total		\$293.05

Getting the Pulleys Right

I cobbled together a spreadsheet and some graphs using the data from the pump performance sheet. Then I was able to evaluate pump output at various motor horsepower and pump rpm. This demonstrated that direct coupling the pump to the motor would not quite do what I wanted.

The 1/4 hp motor (the largest the inverter would handle) directly coupled to the pump would put out about 8.5 gallons per minute (32 lpm) at 17 psi, running at 1,725 rpm. To get more pressure would require changing the gearing by using different size pulleys on the pump and motor. A larger pulley on the pump would lower the pump rpm, resulting in a decrease in output (gpm) but an increase in pressure (psi).

This formula will determine proper pulley size:

$$\frac{\text{motor rpm}}{\text{pump rpm}} = \frac{\text{pump pulley diameter}}{\text{motor pulley diameter}}$$

In our case, a 3 inch (7.6 cm) pulley on the motor and a 4.5 inch (11.4 cm) pulley on the pump would turn the pump at about 1,150 rpm. My graph showed that this rpm would put out about 4 to 5 gpm (15–19 lpm) at 50 psi with a 1/4 hp motor. So, keeping the pressure down to 30 psi would create a system that would pump enough water for our needs and not max out the motor or inverter, at least in theory.

Will She Do It ?

When the pump arrived, I was a little concerned because it was so small (4 3/8 x 3 in; 11 x 7.6 cm). Could a little pump like that possibly provide all the water I needed? The only way to find out was to hook 'er up and see.

To round out the system, we added a small pressure tank, a standard "y-type" 150 mesh drip irrigation filter between the pump and water supply, a foot valve, and a pressure switch set at 20 psi cut-in, 30 psi cut-out. Connections to the supply and distribution piping were made with 3/4 inch (19 mm) reinforced poly tubing.

Sun-Pumped Water!

We gathered all the components, put them together, and it was time to power it up. *It worked!* It pumped water and didn't fry the inverter! But instead of 4 to 5 gpm (15–19 lpm), we got 5 to 6 gpm (19–23 lpm) of solar-powered water for all those thirsty plants just by opening a faucet. This is something that can only be truly appreciated by someone who has spent way too much time dealing with recalcitrant #@%&! gas engine-powered pumps!

The system performed well all last summer operating a sprinkler. Even with the water level dropping about 10 feet (3 m) in the well, the pump was still able to provide water, though that is about the maximum suction head that can be expected.

Power consumption, according to a Bogart Tri-Metric battery monitor, is 17.3 to 19.0 amps (12 VDC), with a 22.6 amp starting surge. I tested it on our drip irrigation system, at approximately 140 gallons (530 l) per hour. With a ratio of 1.5 minutes running to 1.75 minutes off, the consumption was only 9.4 amp-hours per hour. With a pressure tank installed in the water line, the pump runs until the pressure reaches 30 psi. It then goes off until enough water is used to lower the pressure to 20 psi. If the pump were running all the time, it would use about 18 amp-hours per hour.

This summer we'll experiment with some different pulley combinations to fine tune the system. We'll also install that drip irrigation system, turning another solar-powered fantasy into reality.

Access

Author: Al Latham, 470 Dharma Rd., Chimacum, WA 98325 • 360-732-4607 • thinkedg@olympen.com

Sources for parts:

Surplus Center, PO Box 82209, Lincoln, NE 68501-2209 • 800-488-3407 or 402-474-4055

Fax: 402-474-5198

W. W. Grainger, Inc., 100 Grainger Parkway, Lake Forest, IL 60045-5201 • 847-535-1000
postoffice@grainger.com • www.grainger.com



SOLAR-ONE™ TECHNOLOGY AT WORK: THE HIGH UTILIZATION POSITIVE PLATE

Innovative technology is what separates Solar-One™ from the rest of the pack. Delivering full capacity for more total cycles than conventional batteries, Solar-One batteries are engineered for outstanding performance, from the inside out!

A Take a close look at the Solar-One unique high-utilization positive plate, and you will see that it is our positive grid that provides the foundation for Solar-One Positive Plate Technology. Incorporating the highest quality raw material available in the industry. The Solar-One grid uses our own metallurgical formulation and a computer-controlled grid casting system, another industry exclusive! The result:

B the Solar-One grid contains larger lead crystals, and larger crystals mean fewer points for corrosion to attack the battery.

C To accommodate grid corrosion and growth, many battery manufacturers are forced to use a "floating seal", a battery design which is far more subject to leakage than the Solar-One's burned post-to-cover seal. Having controlled the growth of our positive grid, the Solar-One seal is stronger and less vulnerable to leakage.

D The key to Solar-One's



tradition of longer battery life at full capacity is our patented H.U.P. technology (US patent #4,135,829). H.U.P. is a process which optimizes both the active material utilization and the longevity of the positive paste. A colloidal suspension of

tetrafluoroethylene (Teflon®) is added, at precisely measured volume, temperature, and time, to the paste mix and causes the formation of a pervasive network of fibers throughout the active material.

E This process known as fibrillation, locks the active material into place and virtually eliminates flaking and shedding - the chief causes of battery failure.

F Tested at the National Battery Testing facility batteries with H.U.P. have been shown to increase working life by at least 20%, with absolutely no sacrifice of capacity! In fact, H.U.P. batteries deliver full capacity longer, have faster voltage recovery with lower internal resistance, and last longer than conventional batteries. For more power in your Renewable Energy System look for the H.U.P. Solar-One™ label. High Utilization Positive plate technology only from:



The First Name In R-E Batteries

Visit our **NEW Store!**

6791 South Main St.
Suite C
Bonners Ferry, ID 83805

800-718-8816
208-267-6409
fax: 208-267-3973
www.nwes.com

email: batteries@nwes.com



Dealer Inquiries Invited.

- Warranted for 2100 cycles at 80% depth of discharge •
- FREE Shipping in 48 states •
- HUP Technology Patented in 1982 •
- ISO 9000 Certified •

Now you can enjoy the benefits of the Proven Hup Technology in your R-E system with the Hup Solar-One. Best Factory Warranty: 5 years Free Replacement, 5 years Pro-rated.

FREE System Design and Product Catalog for all your alternative energy needs!
Special Pricing on Package Systems / Best Pricing & Customer Service is our Goal

Check our ONLINE CATALOG at WWW.nwes.com

GO FOR SOLAR! NORTHWEST ENERGY STORAGE 800-718-8816 GO FOR SOLAR! NORTHWEST ENERGY STORAGE

Remember the first time you realized the power of solar energy!

Trace
ENGINEERING

Immediate delivery on all Trace power panels and sine wave inverters!
Immediate delivery on Solarex MSX 120 modules!
Immediate delivery on Southwest Windpower wind generators!



System Design



Efficient Appliances



Components

We'll do our own backflips to give you the price and service you need!
Dealers and installers are needed now! Call today!
We've got leads and coop advertising support!

S U N E L E C T R O N I C S
INTERNATIONAL, INC.

Tel: (305) 536-9917 / Fax: (305) 371-2353
email: info@sunelec.com • <http://www.sunelec.com>

Take the Guesswork Out of Power Measurement



Things that Work!
Home Power #67



Richard Perez, in his review of the 4-1850 Brand Digital Power Meter for *Home Power*, said, "This is the first time that I have wished for more than two thumbs, 'Both Thumbs Up!'"

BRAND DIGITAL POWER METER

Brand Electronics manufactures digital power meters that are easy to use, reliable, accurate and affordable

- Measures overall power consumption and cost of operation.
- Use to measure 117 VAC circuit loads up to 1850 watts and determine sizing requirements for backup power supplies and circuit protection.
- Make informed decisions regarding:
 - System sizing,
 - Appliance selection and replacement,
 - The use of equipment in standby mode,
 - Energy reduction methods.

Model 4-1850 displays:

Watts, kW-hrs, User Cost, & Average Monthly Cost.

Model 20-1850 and **20-1850CI** displays:

Watts, kW-hrs, User Cost, Average Monthly Cost, Amps, Volts, Power Factor, Vars, V-A, & Peak Watts.

Model 21-1850CI is a data logging unit. It has Model 20 capability plus on board memory to accumulate data over prolonged periods for download to computer.

Price:	4-1850:	\$149.95
	20-1850	\$249.95
	20-1850CI	\$299.95
	21-1850CI	\$349.95

Price includes domestic shipping and handling.

CI = Computer Interfacing: includes RS-232 interface, cable and software.

Maine residents add 5.5% sales tax.

I'm very impressed with this meter. I've learned a lot about my appliances. Some that I thought used a lot of electricity, didn't. Others were just the opposite. The meter and software work exactly as represented. What a novel concept!...

This has been one of my best purchases! I've learned a great deal and thought I'd give you a well deserved "pat on the back".... Thanks!

—John R. Grau, President, Affordable Electric Inc

Interestingly, both Bob and I have personal meters we use on site evaluations and I can never hang on to mine for more than a week. I keep selling it! We also allow customers to leave a deposit equal to the sale price and take the meter home to test their appliances. So far everyone has called back to let us know they wanted to keep the meter.

—Ray Ogden, Energy Outfitters

Brand Electronics ships customized units on a routine basis. We welcome an opportunity to discuss your power measurement applications; AC or DC; any voltage, current, or plug configuration.

See our web site for additional product specifications and information on availability of new products.

Dealer inquiries:

atkinson@brandelectronics.com

Tel/Fax: 207-737-3474

Call today! To order, call toll free 24 hrs.



1-888-433-6600



<http://www.brandelectronics.com>

Brand Electronics

421 Hilton Rd., Whitefield, ME 04353

For information only, call 1-207-549-3401

email: info@brandelectronics.com

STEAM

for the Homestead?

Skip Goebel ©1999 Skip Goebel

A 10 KW steam unit with a 400 amp maximum output at 30 volts.

Although steam power has been around for centuries, small-scale steam power has gone the way of the straight razor and a young girl's ability to make apple pie. We have become so spoiled on refined fuels and disposable goods that the skills necessary to be self sufficient have long been lost.

In days past, steam allowed people who were less than affluent to be producers of goods and services using the raw resources at hand. Today, steam is making a resurgence in the alternative energy field and promises to give other forms of alternative energy a run for their money. But steam power is no longer common. So education is necessary to give people the tools to make an educated choice.

Is Steam Right for You?

It is possible to generate electricity for the homestead with small-scale steam power. To find out if steam is right for you, answer these questions: How much wood do you want to cut? How much money do you want to spend? What are you going to do with all the heat? Do you have the savvy required to use an unrefined fuel?

How Much Wood Do You Want to Cut?

Most people say, "I have plenty of trees." What they don't realize is how much material handling is involved in using an unrefined fuel. A lot of elbow grease is needed to handle wood. And practically speaking, there is just not very much electricity in a stick of wood.

In typical steam systems, a small 500 watt genset may consume 20 pounds (9 kg) of wood an hour. A larger 10 KW AC powerplant uses 200 pounds (91 kg) of wood per hour, and if run constantly could consume a cord of softwood in less than two days. Now you see why coal and oil can look like viable options! Sure, you can get more by being more efficient, but that is a matter of cost, so...

How Much Money Do You Want to Spend?

A steam system is going to cost you between US\$2 and \$6 per watt. Used equipment is cheaper. Of course, the more efficient and automatic it is, the more expensive it is. You have to weigh the practicality against your capital investment. A lot of money can be saved by buying separate components, such as the engine and boiler, and assembling them yourself. This is hard work, but very satisfying—not to mention that you get a better understanding of your system.

A 500 watt system will cost you between US\$3,200 and \$4,000 new. Systems generating 10,000 watts or more will cost you about US\$2 per watt. This may not be cost effective for you unless you have a use for heat, which is the main product of steam.

What Are You Going to Do With the Heat?

Even a 500 watt steam genset will produce 35,000 BTUs of useable heat in the steam exhaust. That's a lot of heat and it makes no sense to waste it. Whether or not you can use the heat is usually the deciding factor between a steam generator and a diesel generator. But if you have a use for large amounts of useable and controllable heat, no other form of alternative energy can touch steam.

A typical 10,000 watt steam genset can give you up to 1/2 million BTUs of controllable heat. In other words, steam will light the chicken farm and make heat to process the chickens too. Kiln drying, wood bending, food processing, refining, and chemical processes all are typical uses for steam heat. With steam, production processes are possible with raw resources. What you can do with the steam depends upon your knowledge and aptitude for mechanical things.

Do You Have the Savvy to Utilize Unrefined Fuels Like Wood?

We live in a time where the world is spoiled on the luxuries that refined fuels have to offer. Unfortunately, burning a solid and unrefined fuel requires full time attention. That is why there are refined fuels. Refined fuels allow the energy process to be automatically regulated and controlled—when it's on, it's on, and when it's off, it's off. Not so with fuels like wood.

There is an inherent danger when using a raw fuel and storing the energy in a boiler. This is not an insurmountable problem, but the operator must be educated in the process. It is best if the operator enjoys it. If you're into it, you're always finding ways to improve the process. Forget what your mom said and remember, "There is no shame in playing with fire."

Common Sense

When generating electricity, we usually overlook the efficiency of the load we plan to operate. Efficiency can

mean big savings in your system cost—spend your money on efficient appliances and lighting first, and you won't be sorry. When it comes to individual components, you will find that there are specialists in each field. You will be time and money ahead if you deal with more than one vendor for a complete power system. Remember that application is the key and there is no "one size fits all" system.

Any form of alternative energy is going to require your time and attention. Buying from the electric company means they do all the material handling of the energy and you simply use it. Be prepared to spend money—serious money—on your energy production. And of course, be prepared to break a sweat now and then.


Generally speaking, the less automatic and more labor intensive your resource handling is, the cheaper it will be. You will have to decide for yourself just how far you want to go and how much you will spend to get there.

Look at the Costs

Steam has its own niche, as do other forms of alternative energy. Steam excels above the other common systems in applications requiring large quantities of controllable, useable heat. Steam also has an edge as far as capital investment. A small steam system of up to 5,000 watts will cost US\$3 to \$5 per watt. A system of 10,000 to 20,000 watts will cost US\$2 to \$3 per watt. Larger systems are US\$1 or less per watt. And good quality used equipment costs much, much less!

Compare that with solar cells (US\$9 per watt, system cost) and wind (US\$2–4 per watt). So the gist of all this is that steam has the potential to be a dominant force in the home-based power production field. It is only a

A 500+ watt steam genset.

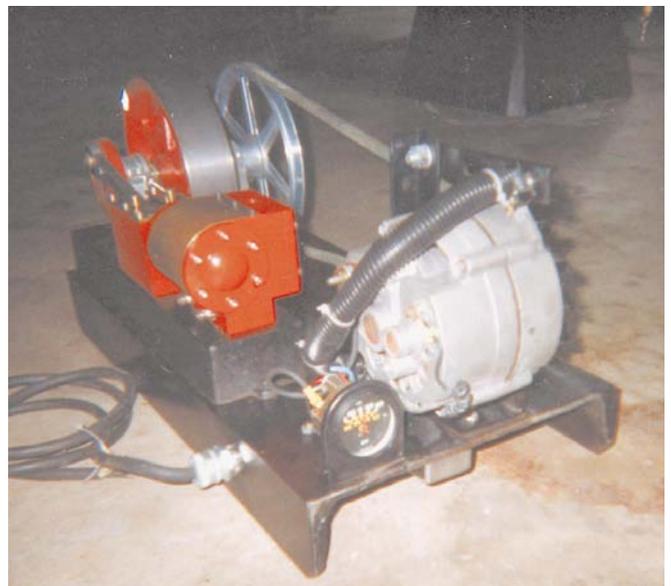



A 4 KW shop power system.

matter of time before the venture capitalists discover the next big investment in the alternative energy field. Steam is not for everyone, but it is definitely attractive to those who don't mind breaking a sweat and getting paid for it.

In Round Numbers

It takes 20 pounds (9 kg) of wood to produce 1 KWH. It takes 30 to 40 pounds (14–18 kg) of water converted to steam to produce 1 horsepower (hp) for an hour. An engine costs about US\$1,000 per hp and a boiler the same. Commercial grade steam engines use sealed ball bearings and have few moving parts and therefore can last for decades with minimal maintenance.

It takes 1,200 BTUs to convert a pound (0.45 kg) of water to a pound of steam at 100 psi. Boilers are normally 50 percent efficient and engines 3 to 10 percent efficient. Most engines have between 30,000 to 40,000 BTUs per hp in the exhaust. Commercial type piston engines run between 600 and 1,200 rpm. They are capable of turning very slowly, and at 100 psi, give 15 to 20 footpounds or more of torque per hp. One steam hp is the same as one electric hp and up to three gas engine hp.

How To Do It

Step One: Get educated! Find a local steam guru to help you. Join a steam club in your area. There are over 5,000 steam engine clubs in the western hemisphere—chances are good that you're within an hour's drive of one. There are several publications on steam, but nothing beats talking to someone who has been there. Get the *Steam and Gas Engine Show Directory* to find a club near you. You might also contact a museum or local historical society.

Step Two: Get your financial arrangements in order. While this makes good sense for all alternative energy

systems, it especially applies to steam. Steam is pretty intolerant of shortcuts.

Step Three: Determine what your needs really are. If all you want to do is make electricity and watch satellite TV in your air conditioned home, steam probably is not for you. Steam is the most labor intensive of all renewable energy systems and unless you have a use for all the heat you will create, it just isn't practical. In other words, *you're* going to be cutting the wood while someone else is enjoying the air conditioning.

Step Four: Scavenge or buy all the equipment you can get that utilizes steam. No, we are not talking electricity here. Rather, items like radiators, kiln dryers, wood benders, distillers and pasteurizers, all sorts of commercial food processors, sterilizers, etc. Many things you use in your everyday life are made with steam in one way or another.

Step Five: Educate the wife and kids about the health benefits and deep spiritual gratification that can only come from cutting and splitting wood.

Where to Find Help

Almost every factory and powerplant has a steam engineer floating around. Find 'em and buy 'em a beer or three. You will find that this highest form of the human race is quite amicable and willing to share their knowledge about steam. If you are too antisocial for this approach, consider joining the local steam club. See the Access section for a directory of local clubs and shows.

Another good way to learn is to attend steam school. Sensible Steam now offers three-day classes on steam as an alternative energy source. There will be several this summer. See our Web site for full information. Additionally, good reading on steam can be found in *Countryside Magazine*. These fine folks are serious about self sufficiency and they have their own steam system providing electricity and heat. Best of all, they designed it to their needs.

Steamed Eccentrics

I predict that steam will become to alternative energy what herbal medicines became to the pharmaceutical industry—not necessarily the only way to do the job, but one that is obtainable and works. While there are a lot of people who do not want to play with fire, there are lots who do. There is no way to describe the psychological satisfaction that comes from burning wood (and old bills!) and watching that energy being converted to mechanical motion. The heat feels good and the smoke is stimulating to those of us who are slightly eccentric. And after all, aren't most folks who dig alternative energy just a little eccentric?

Access

Author: Skip Goebel, Sensible Steam, 152 Von Goebels Lane, Branson, MO 65616 • 417-336-2869
146942@msn.com • www.sensiblesteam.com

Countryside & Small Stock Journal, W11564 Hwy 64, Whithee, WI 54498 • 715-785-7414 or 800-551-5691
Fax: 715-785-7414 • csymag@midway.tds.net
www.countrysidemag.com

Steam and Gas Engine Show Directory, Stemgas Publishing Company, PO Box 328, Lancaster, PA 17608 • 717-392-0733 • Fax: 717-392-1341
stemgas@pptnet.com • www.stemgas.com

Iron-Men Album, Stemgas Publishing Company (see above) • Probably the best classified section for old steam machinery.

Live Steam Magazine, PO Box 1810, Traverse City, MI 49685 • 800-447-7367 or 616-946-3712
Fax: 616-946-3289 • jrjice@villagepress.com
www.villagepress.com/livesteam • Flagship publication on steam as a hobby.

Tiny Power Steam Engines, PO Box 1605, Branson, MO 65615 • 417-334-2655 • www.tinypower.com
The General Motors of small steam engines since 1947.

Mike Brown, PO Box 4884, Springfield, MO 65808
417-890-8636 • dlaw70@earthlink.net
http://home.earthlink.net/~dlaw70/12stmng.htm
Builders of the first and best one and three horsepower commercial duty steam engine.

Hobby Steam Boilers, PO Box 26, Slocum, RI 02877-0026 • Phone/Fax: 401-783-1859 • Excellent boilers in small horsepower ranges.

Powered by Steam, PO Box 1771, Branson, MO, 65615 • 417-335-8099 or toll free 877-925-6824
A good vendor of info, tapes, and books on steam power.



DISCOUNT HOME POWER PRODUCTS

Components and complete systems by Trace, Siemens, Southwest Windpower, SunWize, Concord, Zomeworks, and other quality manufacturers.
Visit us on the Web to start saving \$\$\$

MHS-SOLAR.com

MHS Solar • PO Box 31304 • Alexandria, VA 22310

BACKWOODS SOLAR ELECTRIC SYSTEMS

For an Earth Restored and a World at Peace

Independent Electric Power Systems for the Remote Home — Solar Electric, Wind, Hydro

We are a family business, living with our products for over 20 years, and offer the knowledge to help you set up your energy system. Free Consultation. Questions are personally answered.

Our catalog includes a planning guide to help you understand how to put your energy system together—its applications and sizing. We offer lower than usual prices on **Solarex** and **Siemens** PV modules and **Kohler** generators. Our **Trace** inverters include free battery cables. We carry **Sun Frost**, **Nova Kool**, and **ConServ** refrigerators, specialized appliances and lighting, and a range of meters and controls: **Heliotrope**, **SCI**, **Pulse**, and **TriMetric**.



Our \$3 Catalog/planning guide is FREE to Home Power readers.

Most items in stock for immediate shipment. We accept VISA, MasterCard, American Express, and Discover



Steve & Elizabeth Willey • 1395-HP Rolling Thunder Ridge • Sandpoint, Idaho 83864

Phone: (208) 263-4290 • Fax: (208) 265-4788 • E-mail: info@backwoodssolar.com • Web: www.backwoodssolar.com

SOLARFORCE • SOLARAM • SOLAR CENTRIFUGAL

SUNRISE • SLOWPUMP • FLOWLIGHT BOOSTER PUMP



(FILL IN THE BLANK)

A:



Running an inefficient water pump is like throwing money down the drain. Dankoff pumps reduce your power consumption, saving you money from the day you buy your system. Ask your dealer for details or call us toll free at 888-396-6611. You can also visit us on the Web at www.dankoffsolar.com or e-mail us at pumps@dankoffsolar.com.

The answer's so simple. Get a Dankoff pump.

SOLARFORCE • SOLARAM • SOLAR CENTRIFUGAL

The Southern Star in Solar

SERVING THE SOUTHERN UNITED STATES & CARRIBEAN





Tom & Shirley Lane...ECS Owners

SOLAR CONTRACTING SINCE 1977

4,000 REFERENCES AVAILABLE

FULL SERVICE DESIGN & INSTALLATION

SITE SURVEYS / LOAD ANALYSIS / ON-SITE TECHNICAL SUPERVISION




Tropical Solar Experts

(352) 377-8866



Siemens Solar
PowerPro™

6120 SW 13th Street • Gainesville, Florida 32608 • USA • www.ecs-solar.com

CHINA DIESEL IMPORTS

OWN YOUR OWN
DIESEL ELECTRIC
COMPANY

THE LEADER
SINCE 1977 IN
DIESEL POWERED
GENERATORS,
TRACTORS AND
MARINE ENGINES.
ALSO SPECIALIZING
IN INVERTERS,
WIND AND SOLAR
ELECTRIC POWER



SPECIAL

25 hp 4 X4 DIESEL
TRACTOR **\$5995.⁰⁰**

Back Hoe &
front end loader
Models
also available

Call or E-Mail 24 hrs / 7 days a week for FREE color literature 1-800-341-7027

Cdi@chinadiesel.com Visit us at WWW.chinadiesel.com

Or write to: China Diesel Imports, 15749 Lyons Valley Rd., Jamul, CA 91935

Warning!! Do not be fooled by "Here today, gone tomorrow" imitators. We have no dealers or distributors, we sell only direct.

TRACE ENGINEERING

four color on negatives

7.125 wide
4.5 high

You Can't Always Rely on the Grid

But you can always rely on Rolls batteries.



You have invested in an alternative energy generating system. Make sure your battery is not your weakest link. Insist on North America's best deep-cycle battery... Rolls.

- Dual-container construction eliminates potential leaks, stray current, and decreases maintenance
- Unsurpassed cycling due to the most dense active material in the industry
- Modular construction for easier installation
- Average life expectancy is 15 years - Warranted for 10 years

Rolls

BATTERY ENGINEERING
1-800-681-9914

Surrette Battery Company Ltd., Springhill, NS, Canada, B0M 1X0
www.surrette.com e-mail: jds@surrette.com

POWER IS EVERYTHING!

Get the **MOST** power from your system...Build it with us.
The highest level of professional service with design and complete tech support at the lowest possible prices.
Compare the average retail to our **"Power Pricing"** that includes shipping.



Solar Panels: Brand New, 20 year warranty

Module	Rated Watts	Average Retail	Power Pricing		
			1-3	4 +	12 +
MSX-40	40 W	\$335	\$286	\$276	\$266
MSX-56	56 W	\$354	\$308	\$298	\$288
MSX-60	60 W	\$385	\$329	\$319	\$309
MSX-64	64 W	\$401	\$346	\$336	\$326
MSX-77	77 W	\$470	\$426	\$416	\$406
MSX-83	83 W	\$499	\$453	\$443	\$433
MSX-120	120 W	\$739	\$672	\$662	\$652



Inverters: Built-in battery charger, auto-transfer switch

Model	DC Volts	AC Watts	Average Retail	Power Pricing	
				One	Two
DR1512	12 V	1,500 W	\$990	\$802	\$789
DR2412	12 V	2,400 W	\$1,345	\$1,082	\$1,069
DR1524	24 V	1,500 W	\$940	\$778	\$755
DR2424	24 V	2,400 W	\$1,345	\$1,082	\$1,069
DR3624	24 V	3,600 W	\$1,545	\$1,269	\$1,239
SW2512	12 V	2,500 W	\$2,580	\$2,089	\$2,039
SW4024	24 V	4,000 W	\$3,405	\$2,679	\$2,599
SW4048	48 V	4,000 W	\$3,405	\$2,679	\$2,599
SW5548	48 V	5,500 W	\$3,970	\$3,099	\$2,998

Call us for **Power Pricing** on other Trace inverters and pre-built Trace Power Panels.

Wind Generators: 12 or 24 Volt, built in controller

Model	Average Retail	Power Pricing	
		One	Two
Air 403	\$590	\$529	\$519
Air 403 Marine	\$830	\$749	\$739
Air 403 industrial	\$985	\$849	\$835
Windseeker 502 (2 blade)	\$853	\$799	\$784
Windseeker 503 (3 blade)	\$1,065	\$999	\$983
Windseeker 503 Marine (3 blade)	\$1,180	\$1,027	\$1,009

Southwest Windpower
Renewable Energy Made Simple

High-tech hand or 12v motor powered water well pump!

Fits down inside your well casing above your existing submersible
Pumps up to 3gpm by hand or with just one solar panel - pumps down to 500 ft.

Call for quote on other premium components not listed here.
Power Pricing includes prompt delivery anywhere in the continental U.S. with Item Value Insurance. Immediate shipping on most items.

AlternativeEnergySystemsCo
501-839-4017 • www.poweriseverything.com

Solar • Wind • Aquair Hydro • Inverters • Batteries • Controls • Complete System Discounts
There is no other company that offers a higher degree of professional service and support.

What is a Charge Controller?

Windy Dankoff

©1999 Windy Dankoff

A charge controller is an essential part of nearly all power systems that charge batteries, whether the power source is PV, wind, hydro, fuel, or utility grid. Its purpose is to keep your batteries properly fed and safe for the long term.

The basic functions of a controller are quite simple. Charge controllers block reverse current and prevent battery overcharge. Some controllers also prevent battery overdischarge, protect from electrical overload, and display battery status and the flow of power. Let's examine each function individually.

Blocking Reverse Current

Photovoltaic (PV) panels work by pumping current through your battery in one direction. At night, the panels may pass a bit of current in the reverse direction, causing a slight discharge from the battery. (Our term "battery" represents either a single battery or bank of batteries.) The potential loss is minor, but it is easy to prevent. Some types of wind and hydro generators also draw reverse current when they stop, but most do not, except under fault conditions.

In most controllers, charge current passes through a semiconductor (a transistor) which acts like a valve to control the current. It is called a semiconductor because it passes current in only one direction. It prevents reverse current without any extra effort or cost.

In some controllers, an electromagnetic coil opens and closes a mechanical switch. This is called a relay. It switches off at night, to block reverse current. As it turns on and off, there is an audible clicking sound.

If you are using a very small array relative to the size of the battery, then you may not need a charge controller. This is a rare application. An example is a tiny maintenance PV module that trickle-charges a battery and compensates for battery discharge in a parked vehicle but will not support significant loads. In this situation, you can install a simple diode to block reverse current. A diode used for this purpose is called a blocking diode.

Preventing Overcharge

When a battery reaches full charge, it can no longer store incoming energy. If energy continues to be applied at the full rate, the battery voltage gets too high. Water separates into hydrogen and oxygen and bubbles out rapidly. It looks like it's boiling so we sometimes call it that, although it's not actually hot. There is an excessive loss of water, and a chance that the gasses can ignite and cause a small explosion. The battery will also degrade rapidly and may possibly overheat. Excessive voltage can also stress your loads (lights, appliances, etc.) or cause your inverter to shut off.


Preventing overcharge is simply a matter of reducing the flow of energy to the battery when the battery reaches a specific voltage. When the voltage drops due to lower sun intensity or an increase in electrical usage, the controller again allows the maximum possible charge. This is called voltage regulating. It is the most essential function of all charge controllers. The controller "looks at" the voltage, and regulates the battery charging in response. This can be illustrated by an analogy:

The Energy Chef is watching a pot of water on a gas burner, which is fed by a tube coming from the sun. He has one hand on the gas valve. He's thinking, "I need to get this water as close to a boil as possible before the sun goes down, but I must never boil the water."

In this analogy, the temperature of the water represents battery voltage; the flow of gas represents charging current; boiling represents overcharge; and the energy chef manipulating the valve is like the charge controller.

Some controllers regulate the flow of energy to the battery by switching the current fully on or fully off. This is called on/off control. Others reduce the current gradually, called pulse width modulation (PWM). Both methods work well when the voltage set points are properly selected for your type of battery.

The Energy Chef

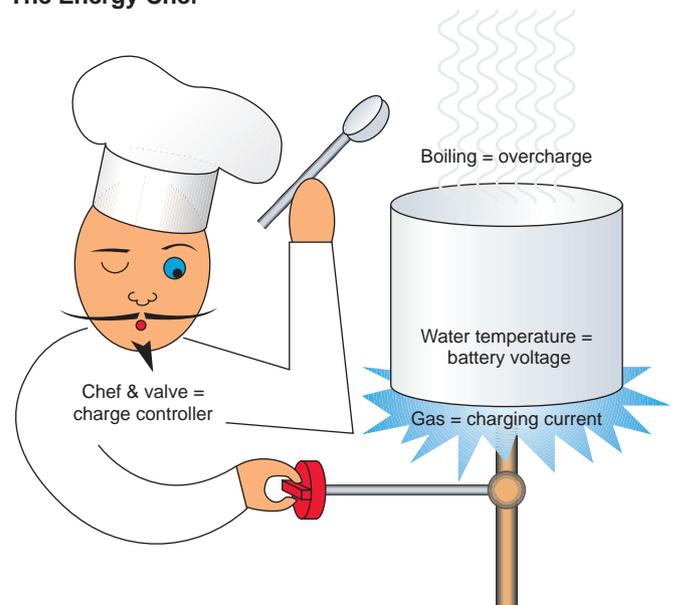

A PWM controller holds the voltage more constant. If it has two-stage regulation, it will first hold the voltage to a safe maximum for the battery to reach full charge. Then it will drop the voltage lower to sustain a “finish” or “trickle” charge. Two-stage regulating is important for a system that may experience many days or weeks of excess energy (or little use of energy). It maintains a full charge but minimizes water loss and stress.

The voltages at which the controller changes the charge rate are called set points. When determining the ideal set points, there is some compromise between charging quickly before the sun goes down, and mildly overcharging the battery. The determination of set points depends on the anticipated pattern of use, the type of battery, and to some extent, the experience and philosophy of the system designer or operator. Some controllers have adjustable set points, while others do not.

Control Set Points vs Temperature

The ideal set points for charge control vary with battery temperature. Some controllers have a feature called temperature compensation. When the controller senses a low battery temperature, it will raise the set points. Otherwise when the battery is cold, it reduces the charge too soon. If your batteries are exposed to temperature swings greater than about 30°F (17°C), compensation is essential.

Some controllers have a temperature sensor built in. This type of controller must be mounted in a place where the temperature is close to that of the batteries. Better controllers have a remote temperature sensor on a small cable. The probe should be attached directly to a battery in order to report its temperature to the controller.

An alternative to automatic temperature compensation is to manually adjust the set points (if possible) according to the seasons. It may be sufficient to do this only twice a year, in spring and fall.

Control Set Points vs Battery Type

The ideal set points for charge controlling depend on the battery design. The vast majority of RE systems use deep cycle lead-acid batteries of either the flooded type or the sealed type. Flooded batteries are filled with liquid. These are the standard, economical deep cycle batteries.

Sealed batteries use saturated pads between the plates. They are also called “valve-regulated,” “absorbed glass mat,” or simply “maintenance-free.” They need to be regulated to a slightly lower voltage than flooded batteries or they will dry out and be ruined. Some controllers have a means to select the type of battery. Never use a controller that is not intended for your type of battery.

Low Voltage Disconnect

The deep cycle batteries used in renewable energy systems are designed to be discharged a maximum of 80 percent (20% state of charge). If they are discharged 100 percent, they are immediately damaged. Imagine a pot of water boiling on your kitchen stove. The moment it runs dry, the pot overheats. If you wait until the steaming stops, it is already too late!

Typical Set Points for 12 V L-A Batteries at 77°F (25°C)

<i>Set Point</i>	<i>Voltage</i>
High limit (flooded battery)	14.4 V
High limit (sealed battery)	14.0 V
Resume full charge	13.0 V
Low voltage disconnect	10.8 V
Reconnect	12.5 V
Typical temperature compensation per 1°C deviation from 25°C	-0.03 V

These are typical set points, presented here only for example.

Similarly, if you wait until your lights look dim, some battery damage will have already occurred. Every time this happens, both the capacity and the life of the battery will be reduced by a small amount. If the battery sits in this overdischarged state for days or weeks at a time, it can be ruined quickly.

The only way to prevent overdischarge when all else fails is to disconnect loads (appliances, lights, etc.), and then reconnect them only when the voltage has recovered due to some substantial charging. When overdischarge is approaching, a 12 volt battery will drop below 11 volts (a 24 V battery will drop below 22 V).

A low voltage disconnect (LVD) circuit will disconnect loads at that set point. It will reconnect the loads only when the battery voltage has substantially recovered due to the accumulation of some charge. A typical LVD reset point is 13 volts (26 V on a 24 V system).

All modern inverters have LVD built in, even cheap pocket-sized ones. The inverter will turn off to protect itself, your loads, and your battery. Normally, an inverter is connected directly to the batteries, not through the charge controller, because its current draw can be very high, and because it does not require external LVD.

If you have any DC loads, you should have an LVD. Some charge controllers have one built in. You can also obtain a separate LVD device. Some LVD systems have a “mercy switch” to let you draw a minimal amount of energy, at least long enough to find the candles and matches! DC refrigerators have LVD built in.

If you purchase a charge controller with built-in LVD, make sure that it has enough capacity to handle your DC loads. For example, let's say you need a charge controller to handle less than 10 amps of charge current, but you have a DC water pressurizing pump that draws 20 amps (for short periods) plus a 6 amp DC lighting load. A charge controller with a 30 amp LVD would be appropriate. Don't buy a 10 amp charge controller that has only a 10 or 15 amp load capacity!

Overload Protection

A circuit is overloaded when the current flowing in it is higher than it can safely handle. This can cause overheating and can even be a fire hazard. Overload can be caused by a fault (short circuit) in the wiring, or by a faulty appliance (like a frozen water pump). Some charge controllers have overload protection built in, usually with a push-button reset.

Maximum Power Point Tracking

A new feature is showing up in charge controllers. It's called maximum power point tracking (MPPT). It extracts additional power from your PV array under certain conditions.

The function of MPPT is analogous to the function of a transmission in a car. When the transmission is in the wrong gear, the wheels do not receive maximum power. That's because the engine is running either slower or faster than its ideal speed range. The purpose of the transmission is to couple the engine to the wheels in a way that lets the engine run in a favorable speed range in spite of varying acceleration and terrain.

Let's compare a PV module to a car engine, with voltage analogous to engine speed. At the ideal voltage, the PV can deliver maximum power. This is the maximum power point, also called peak power voltage (V_{pp}). V_{pp} varies with sunlight intensity and with solar cell temperature. The voltage of the battery is analogous to the speed of the car's wheels. It varies with battery state of charge, and with the loads on the system (any appliances and lights that may be on). For a 12 V system, it ranges from about 11 to 14.5 volts.

In order to charge a battery (increase its voltage), the PV module must apply a voltage that is higher than that of the battery. If the PV module's V_{pp} is just slightly below the battery voltage, then the current drops nearly to zero (like an engine turning slower than the wheels). To play it safe, typical PV modules are designed with a V_{pp} of around 17 volts when measured at a cell temperature of 77°F (25°C) on a cool day. They do that because it will drop to around 15 volts on a very hot day. However, on a very cold day, it can rise to 18 volts!

What happens when the V_{pp} is much higher than the voltage of the battery? The module voltage is dragged down to a lower-than-ideal voltage. Traditional charge controllers transfer the PV current directly to the battery without giving you the benefit of this added potential.

Now let's make one more analogy. The car's transmission varies the ratio between speed and torque. At low gear, the speed of the wheels is reduced and the torque is increased. Likewise, MPPT varies the ratio between the voltage and current delivered to the battery in order to deliver maximum power. If there is excess voltage available from the PV array, it is converted to additional charging current for the

battery. It's like an automatic transmission. As the V_{pp} of the PV array varies with temperature and other conditions, it "tracks" this variance and adjusts the ratio accordingly. That's why it's called a maximum power point tracker.

What advantage does MPPT give in the real world? That depends on your array, climate, and seasonal load pattern. It gives you an effective current boost only when the V_{pp} is more than about 1 volt higher than the battery voltage. In hot weather, this may not be the case unless the batteries are at a low state of charge (SOC). In cold weather however, the V_{pp} can rise as high as 18 volts. If your energy use is greatest in the winter (typical in most homes) and you have cold winter weather, then you can gain a substantial boost in energy when you need it the most!

Here is an example of MPPT action on a cold winter day:


The outside temperature is 20°F (-6.6°C). The wind is blowing a bit, so the PV cell temperature rises to only around 30°F (-1.1°C). V_{pp} = 18.0 V. The batteries are a bit low, and loads are high, so battery voltage = 12.0 V.

Ratio of V_{pp} to battery voltage is 18:12 = 1.5:1

Under these conditions, a perfect MPPT (with no voltage drop in the array circuit) would deliver a 50 percent increase in charge current! In reality, there are losses in the conversion just as there is friction in a car's transmission. Reports from the field indicate that increases of 20 to 30 percent are typically observed.

MPPT controllers are a new technology that is just starting to become available. This sidebar is a simplified introduction to a complex topic. Watch for more information in future issues of *Home Power*.

Typical PV IV Curve

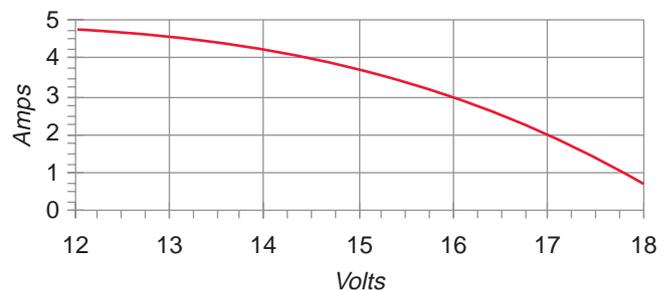

Displays and Metering

Charge controllers include a variety of possible displays, ranging from a single red light to digital displays of voltage and current. These indicators are important and useful. Imagine driving across the country with no instrument panel in your car! A display system can indicate the flow of power into and out of the system, the approximate state of charge of your battery, and when various limits are reached.

Built-in overload protection can be useful, but most systems require additional protection in the form of fuses or circuit breakers. If you have a circuit with a wire size for which the safe carrying capacity (ampacity) is less than the overload limit of the controller, then you must protect that circuit with a fuse or breaker of a suitably lower amp rating. In any case, follow the manufacturer's requirements and the *National Electrical Code* for any external fuse or circuit breaker requirements.

If you want complete and accurate monitoring however, spend about US\$200 for a separate digital device that includes an amp-hour meter. It acts like an electronic accountant that keeps track of the energy available in your battery. If you have a separate system monitor, then it is not important to have digital displays in the charge controller itself. Even the cheapest system should include a voltmeter as a bare minimum indicator of system function and status.

Have It All with a Power Center

If you are installing a system to power a modern home, then you will need safety shutoffs and interconnections to handle high current. The electrical hardware can be bulky, expensive, and laborious to install. To make things economical and compact, obtain a ready-built power center. It can include a charge controller with LVD and digital monitoring as options. This makes it easy for an electrician to tie in the major system components, and to meet the safety requirements of the *National Electrical Code* or your local authorities.

Charge Controllers for Wind and Hydro

A charge controller for a wind-electric or hydro-electric charging system must protect the batteries from overcharge, just like a PV controller. However, a load must be kept on the generator at all times to prevent overspeed of the turbine. Instead of disconnecting the generator from the battery (like most PV controllers) it diverts excess energy to a special load that absorbs most of the power from the generator. That load is usually a heating element, which "burns off" excess energy as heat. If you can put the heat to good use, fine!

Is It Working?

How do you know if a controller is malfunctioning? Watch your voltmeter as the batteries reach full charge. Is the voltage reaching (but not exceeding) the appropriate set points for your type of battery? Use your ears and eyes—are the batteries bubbling severely? Is there a lot of moisture accumulation on the battery tops? These are signs of possible overcharge. Are you getting the capacity that you expect from your battery bank? If not, there may be a problem with your controller, and it may be damaging your batteries.

Control Your Charge!

The control of battery charging is so important that most manufacturers of high quality batteries (with warranties of five years or longer) specify the requirements for voltage regulation, low voltage disconnect, and temperature compensation. When these limits are not respected, it is common for batteries to fail after less than one quarter of their normal life expectancy, regardless of their quality or cost.

A good charge controller is not expensive in relation to the total cost of a power system, nor is it very mysterious. I hope this article has given you the background that you need to make a good choice of controls for your power system.

Access:

Windy Dankoff, Dankoff Solar Products, Inc., 2810 Industrial Rd., Santa Fe, NM 87505-3120 • 888-396-6611 or 505-473-3800 • Fax: 505-473-3830
pumps@danksolar.com • www.dankoffsolar.com



VANNER

four color on negatives

7.125 wide
4.5 high

WORLD POWER TECHNOLOGIES

four color
on negatives

3.5 wide
9.125 high

BOOST YOUR SOLAR OUTPUT

**Peak Power Tracking
Technology Can Boost
Your Solar Output Up To
30% Or More!**



- Patent Pending Peak Power Tracking Controller extracts more power from your PV array.
- Advanced high efficiency power conversion technology delivers up to 30% more charge current to your batteries
- Superior PWM voltage control and available temperature compensation
- User friendly display monitors PV charge performance
- Solar Boost 2000™ (20 amp 12V)
- **NEW Solar Boost 50™ with multistage charging (50 amp 12V/24V)**


Our products are manufactured in the USA for the highest level of quality and reliability. Other products available include multistage AC chargers, inverters, solar panels and more.

Contact RV Power Products or a dealer near you. New distributors welcome.

RV POWER PRODUCTS
1058 MONTEREY VISTA WY
ENCINITAS, CA 92024

(800) 493-7877
(760) 944-8882

 e-mail: info@rvpowerproducts.com / www.rvpowerproducts.com

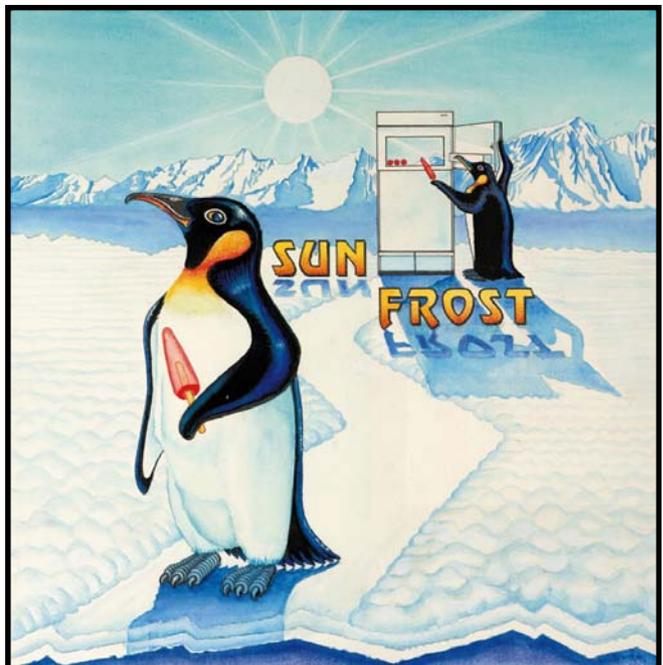

*Is your igloo off the grid?
Call us if you need efficient refrigeration.*

SUN FROST

P.O. Box 1101, Arcata, CA 95518-1101
Phone: 707-822-9095 • Fax: 707-822-6213 • www.sunfrost.com

“HANZI”
Chinese Diesel Generator-Set
Water Cooled • Electric Start

- Turn Key Complete
- Industrial Quality
- Free Tool & Overhaul Kit
- 3 Full Hours On One Gallon Fuel
- **230 / 115 Volt, 50 Hz / 60 Hz**, Single Phase
- Guaranteed Parts Availability
- Prompt Delivery / Shipping
- Runs Home, Small Farm, Shops
- One Year Limited Warranty


15kw, 20kw, 24kw, 30kw, 40kw & 50kw
Diesel Generators are available upon request

*Call Now to Place Your Order,
or For More Information*


NEWINLI - CFMC

13445 Yorba Ave., Chino, CA 91710
Tel: (909)364-0667 Fax: (909) 364-0856

7.5KW
\$2,795

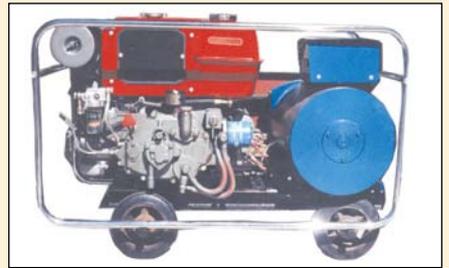

10KW
\$3,162

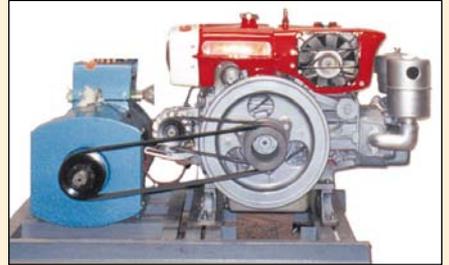

15KW
\$4,885



Intermountain Solar Technologies, Inc.



Inverters

DR 1512	\$ 739
DR 2412	\$ 999
DR 3624	\$ 1139
SW 2512	\$ 1849
SW 4024	\$ 2389

Regulators

C40	\$ 149
PM 60	\$ 229

Solar Panels

V L X 53	\$ 259
SR 50	\$ 269
MSX 64	\$ 314
BP 275	\$ 375
MSX 83	\$ 409
BP 90	\$ 479
SR 100	\$ 490
AP 120	\$ 559

Wind Generators

Air 403	\$ 519
---------	--------

Shop On Line - www.intermountainsolar.com

Or Write - 10288 S. Jordan Gateway #D - S. Jordan, UT 84095

Specializing in Affordable Power - Call Today (800) 671-0169

Things That Work

Tested by Home Power

EN-R-PAK 200: Portable Power by National Solar Technologies, Inc.

Tested by Joe Schwartz, with help from Dave Wilmeth and Richard Perez

© 1999 Joe Schwartz

Thinking about putting together a small, portable PV system to take with you on the road this summer? Check out National Solar Technologies' EN-R-PAK 200 before you do.

The standard 115 VAC unit includes a molded plastic carrying case that houses the battery, charge controller, basic metering, and a 200 watt sine wave inverter. A 49 watt PV module with an adjustable mount is included, along with a compact fluorescent lamp. The unit weighs in at 83 pounds (38 kg), plus 32 pounds (15 kg) for the PV and mount. It has a list price of US\$1,649.

Intended Use

The EN-R-PAK is designed for temporary, recreational, or emergency use. It's ideal for powering small loads such as lights, communications gear, laptops, TVs, CD players, and small water pumps. The user's manual includes a great section detailing what loads or combinations of loads you can expect to run on the unit for a given length of time.

For example, assuming fairly sunny conditions and continuous rather than weekend use, the unit will power three 15 watt compact fluorescent lights for two hours, a twelve inch (30 cm) energy efficient color TV for two hours, and a 60 watt water pump for one hour for every day of sun. The EN-R-PAK sure won't power your house, and it isn't intended to. But if you need a portable source of high quality AC or DC power, take a closer look.



Product Features

The EN-R-PAK 200 includes a framed, 49 watt ASE single crystalline PV module and aluminum ground mount. The PV charges a user-replaceable, 12 volt, 96 amp-hour sealed gel cell battery. A 20 amp charge controller is built into the EN-R-PAK unit and regulates battery charging. The controller is designed for expansion, and additional PV modules can easily be added to the system.

A second DC input is also provided so that a small wind generator, like an Air 403, can supplement battery charging. A built-in 35 watt AC charger enables the battery to be trickle-charged from the grid or a well-regulated engine generator. This rounds out the EN-R-PAK's charging capabilities.

The unit has two fused 12 volt DC outlets. One is an automotive cigarette-type receptacle. The other is a switched two-wire jack that accepts terminals commonly available from electronics and automotive suppliers. The two outlets have a maximum combined output of 15 amps at 12 VDC. In addition, two switched AC receptacles provide 115 VAC output from a 200 watt sine wave inverter. A metering system with four LEDs indicates battery voltage and whether the battery is being charged or discharged. It also identifies several fault conditions, such as low battery voltage and high temperature.

Installation

Anyone who has hooked up an EN-R-PAK will agree that setup is a snap. The PV module is factory mounted to an adjustable aluminum frame. Simply secure it in the desired location, orient it to true south, and adjust the PV to the desired tilt angle using four wing nuts.

One end of the 33 foot (10 m) DC power cord is pre-wired into the PV module's junction box. The other end

is wired to a polarity-correct plug that connects directly to the EN-R-PAK's DC input. Pop the provided 30 amp fuse into the back of the unit, bring on the sun, and your EN-R-PAK is up and charging.

Because the EN-R-PAK is a portable unit, it's easy to plunk it down on the nearest picnic table and put it to work. But heat is the number one killer of electronics, and that includes charge controllers and inverters. To minimize component heat stress, care should be taken to locate the EN-R-PAK base unit in a shaded location.

Operation On and Off the Home Power Grid

Home Power began testing the EN-R-PAK at the 1998 Midwest Renewable Energy Fair (MREF). It powered up Ben's electric hair clippers for a sweltering midwestern summer afternoon of solar buzz cuts. Luckily for the fairgoers, Home Power's experimental subsidiary, *A Hair Razing Experience*, wasn't in existence for more than a couple of hours. The impact on the handful of folks courageous enough to sit down in Ben's chair was much more lasting....

Back in Oregon, the EN-R-PAK was installed in a trailer used by Dave, Home Power's taskmaster and resident audiophile. He put it to regular use, and it performed well during the nine months it was installed there. It allowed him to unplug from the Home Power electric grid entirely.

For the remainder of the summer and through the fall, the EN-R-PAK powered all the electric appliances in the trailer. A typical daily load averaged 150 to 200 watt-hours and included a couple of compact fluorescent lights, a coffee grinder, and a stereo pumping out a healthy daily dose of high-torque rock and roll.

The lower sun angle, shorter day length, and a marginal PV location in the trees made for a tough winter season for the EN-R-PAK. In addition, its location in the trailer, which is mostly an unconditioned space, subjected the unit to below freezing temperatures. It's important to point out that in many locations, any single module PV system may have a hard time reliably supporting even a modest load during the winter months.

Fortunately for Dave, the executives at Home Power & Light were more than happy to reconnect his utility

EN-R-PAK Test Data

Load Watts	Battery Voltage	Vp Output	Vrms Output
18	12.51	161.6	114.8
33	12.39	162.4	114.9
55	12.23	163.6	114.9
90	12.14	172.8	114.8
147	11.84	172.8	115
168	11.69	172.8	115



The EN-R-PAK's control panel.

service. The EN-R-PAK's AC charger and internal transfer switch allowed Dave to power his loads directly from the Home Power grid and trickle charge the EN-R-PAK's battery simultaneously.

Test Data

Performance data for the EN-R-PAK was taken using a Fluke 87 digital multimeter and a Brand model 20-1850 digital power meter. The AC operating voltage was consistently within specification at or slightly below 115 VAC. The inverter also held its peak voltage well under load. And when we tried to overload it, the EN-R-PAK's protective circuitry shut down the inverter due to an overcurrent fault condition at 203 watts.

Suggestions

Dave lived with the EN-R-PAK for nine months and had very few gripes about its operation. A small system like the EN-R-PAK benefits greatly from good load management. It's important to use energy efficient appliances like compact fluorescent lights, and always shut off appliances when they're not in use.

According to the manufacturer, the idle draw of the inverter is 3.5 watts. An additional LED on the inverter output would be a good visual reminder to turn off the inverter when it is not in use.

Summer's Here

The EN-R-PAK 200 is a compact, portable, and highly user-friendly source of both DC and sine wave AC power. It's a great unit for light recreational use. So ditch those glaring propane lanterns on your next camping trip and bring along an EN-R-PAK. It's a well-built product that is true to the concept of plug and play.

Access

Author: Joe Schwartz, Home Power, PO Box 520, Ashland, OR 97520 • 530-475-3179
 Fax: 530-475-0836 • joe.schwartz@homepower.com

Manufacturer: National Solar Technologies, Inc., 1 Elmview Ave., Hamburg, NY 14075 • 800-310-7413 or 716-649-1324 • Fax: 716-649-8655
 sales@en-r-pak.com • www.en-r-pak.com



SW4024\$2279.00
SW2512\$1899.00
SR100\$489.00

Limited Quantities
Prices good through 10/31
Shipping not included

US64\$319.00
PV120\$569.00 each
Air 403\$549.00 (box of 4)

Pro 5000 Onan Generator
Propane • Electric Start • 3,600 RPM • 5.OEGH-EB
\$2,433.00

\$200 OFF
any HUP SOLAR ONE
with the purchase of a
Trace Power Panel

NORTHWEST ENERGY STORAGE



6791 South Main, Suite C, Bonners Ferry, Idaho 83805
800-718-8816 • 208-267-6409 • fax 208-267-3973
www.nwes.com • batteries@nwes.com



Iowa Eighth Annual All Energy Expo

Hawkeye Downs, Cedar Rapids, Iowa

Workshops on wind; active & passive solar;
DHW; PV; commercially built, high school &
junior high electric vehicles; solar cars; utility issues
on restructuring; energy conservation;
classes & projects for teachers & students;
and nationally known speakers on energy.

I-RENEW Power Trailer will be powering the expo.

**Other I-RENEW Events: Straw Bale Building classes • DC Photovoltaic classes
Tour of Prairiewood Nature Center's straw bale building
and PV system in Hiawatha, Iowa**

**Sponsored by seventeen renewable energy organizations
including the Iowa Renewable Energy Association**

POB 466, North Liberty, Iowa 52317-0466 Office: 319-338-3200 or Tom Snyder: 319-875-8772



September 23 - 26

Guerrilla Solar Manifesto

We hold these truths to be self-evident, that all energy is freely and democratically provided by Nature, that utilities both public and private have no monopoly on the production and distribution of energy, that this century's monopolization of energy by utilities threatens the health of our environment and the very life of our planet.

We, the Solar Guerrillas of this planet, therefore resolve to place energy made from sunshine, wind, and falling water on this planet's utility grids with or without permission from utilities or governments. We resolve to share this energy with our neighbors without regard for financial compensation. We further resolve that our renewable energy systems will be safe and will not harm utility workers, our neighbors, or our environment.

Solar Guerrillas of Planet Earth

Take the middleman out...
Charge batteries faster & with far less fuel using
GennyDeeCee
the 12, 24, or now 48 volt DC Generator

- We use commercial-rated OHV Honda engines up to 13 HP, w/ low oil shutdown.
- Control box has ammeter, maintenance meter (measures RPM & elapsed time), fuse, timer, and output control.
- Charging rate does not "fall off" as your battery fills.
- Options: LPG (propane), electric start, remote muffler adapter, 3.4 Gal. gas tank, and pulley/belt guard.
- Automatic shut-down.

"Built to be overbuilt,
priced to compete"

Things that Work
HP68 pg 78



**Feather River
Solar Electric**
also designs and installs
complete solar, hydro,
and wind systems.
Solar-powered since 1982

Feather River Solar Electric
5575 Genesee Rd.
Taylorsville, CA 95983
530-284-7849
www.psln.com/frenergy
CA Lic# 681552



Specializing in
COMPLETE
systems design

*Solar Electric, Heating,
Water, & Appliances
Including complete CAD
design services*


We can supply everything you need to be off-grid...
inverters to modules to batteries, including your kitchen stove.

All the best brands...

TRACE • KYOCERA
APT • BUDERUS
THERMOMAX
WATTSUN
SOLARJACK • IBE
PEERLESS-PREMIER



Authorized
GOLDEN GENESIS
Dealer

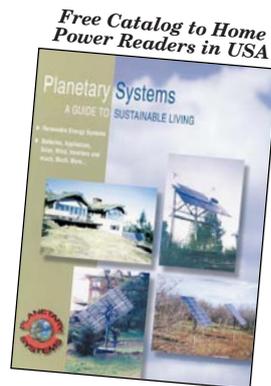

P.O. Box 340, 262 Badger Road
Ennis, MT 59729




Ph 406-682-5646 • Fx 406-682-5644

1-888-MR SOLAR
America's Solar Super Store

**Nobody's
Cheaper!**

SOLAREX®
From only \$5 a watt



TRACE SW 4024
\$2399



VLX 53 \$265

Top solar technology at rock bottom prices.

free catalog

Toll free 1-888-677-6527 www.888mrsolar.com

INTRODUCING...

Morningstar's **SunGuard**. The most advanced small, economical solar charge controller on the market today.

**SunGuard's
technology
provides:**

- Exceptional Reliability
- PWM Battery Charging
- Consistent High Quality
- Low Cost



The SunGuard delivers the same quality and performance as the world-leading SunSaver controllers.

Also new from Morningstar:
SunSaver controllers rated 20 amps and 24 volts
SunLight controllers rated 20 amps and 24 volts



1098 Washington Crossing Rd. • Phone: 215-321-4457
Washington Crossing, PA 18977 USA • Fax: 215-321-4458
Website: www.morningstarcorp.com



**Modern
Super-Energy-Efficient
Refrigerator / Freezers**

- SFRF-10 & SFRF-19 Uprights
- SFRF-6 Chest Models
- Danfoss Compressors
- 4-5" Case Insulation
- Digital Controls
- US Manufactured
- DC & AC Models

Immediately Available



!!NEW!! THE WORLD OF SOLAR 4.0 !!NEW!!
 • Photovoltaic Design A powerful new CD for designing solar systems. With hundreds of Graphics, sounds, & products. * PC Version Only *
 • "Bus Tour"
 • Product Library

Solar Fan

- DC-Powered
- High Efficiency
- 18 Watts
- High Quality
- Brass Hub



**Simpler
Solar
Systems**


Home Power Systems

- Pre-Wired
- Plug-together
- Pre-engineered
- Install in 2 hours



Purchasing 800-248-9786 • 3118 W. Tharpe St, Tallahassee, FL 32303
 Fax: 850-576-5274 • Web: www.y2ksolarpower.com • Email: Simpler@simplersolar.com

NO HASSLE WIND POWER

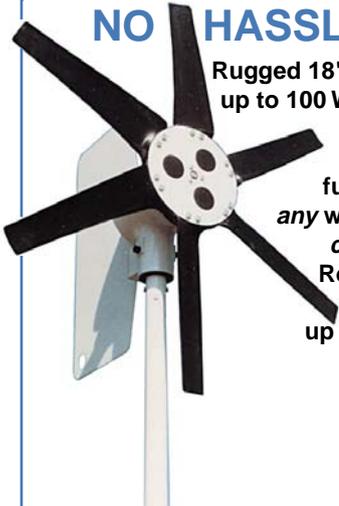

Rugged 18" blade Ampair 100 produces up to 100 Watts *continuously*, 24 Hours per day, at wind speeds from 8 to 100+ mph. No brakes or furling needed...guaranteed at any windspeed! Veteran of 3 years *continuous* Antarctic service. Roof mount is OK; pole mount is better. Put it up, hook it up to the batteries and forget it!

NO-HASSLE WATER POWER

If you have a reasonably fast running stream or tide nearby and 12" of water clear, Aquair UW Submersible Generator can produce 60 to 100 Watts *continuously*, up to 2.4 KWH per day. **NO TURBINES, NO DAMS, NO PIPES!** Water speed 5 mph (brisk walk) = 60W. 8 mph (slow jog) = 100W. Timber, rock, or natural venturi increases output.

12 or 24 VDC



Jack Rabbit Energy Systems

425 Fairfield Ave., Stamford, CT 06902
 (203) 961-8133 • FAX (203) 961-0382
 e-mail: JackRabbitMarine@compuserve.com

Y2K COOKING!

While your computer's on ice and the utility is down you can NOW cook with the...

The Ultimate Cooking Appliance!

GLOBAL SUN OVEN

NO Fuel Needed!



includes FREE UPS delivery within the continental U.S!

- Cooks any kind of food with the power of the sun!
- Reaches temperatures of 360° to 400° Fahrenheit!
- Totally safe—No danger of fire!
- Used daily in 126 countries around the world!
- Ruggedly built for years of trouble-free use!
- As portable as a small suitcase!

To Order Call: **1-800-338-1781**


Sunlight Energy Corporation

4411 W. Echo Lane, Glendale, AZ 85302

Ask us about our complete solar electric Y2K back-up systems featuring the NEW DEEP CYCLE dry cell lead acid batteries.

Renewable Energy on CD-ROM

**Windows,
Mac, or
Unix**

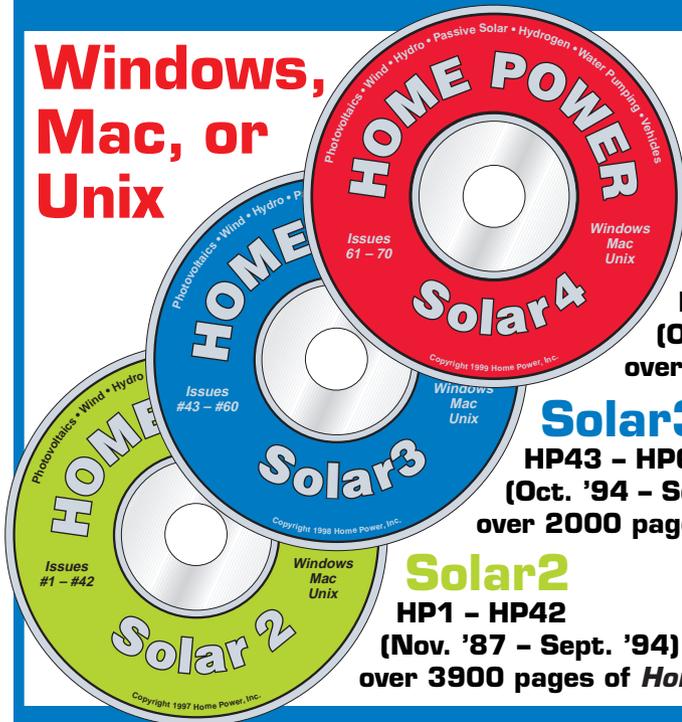

Contains the original magazine layouts
(text & graphics)

**In Adobe Acrobat PDF[®] format: Color • Fully Indexed
Searchable • Exportable • Printable**

Acrobat Readers included

Solar4

HP61 - HP70
(Oct. '97 - May, '99)
over 1200 pages of *Home Power*

*Plus: audio RE lectures,
RE system analysis software,
& RE business database*

Solar3

HP43 - HP60
(Oct. '94 - Sept. '97)
over 2000 pages of *Home Power*

Solar2

HP1 - HP42
(Nov. '87 - Sept. '94)
over 3900 pages of *Home Power*

Home Power
PO Box 520

Ashland, OR 97520

Phone: 541-512-0201

Web: www.homepower.com

\$29^{ea}

Postage Paid

(International orders add \$3)



For credit card orders call Home Power at 800-707-6585



**POWER
UP**

*Alternative Resources Today
to Ensure Tomorrow*

The Southwest Renewable Energy Fair

September 18-19, 1999

**Coconino County Fairgrounds
Flagstaff, Arizona**


Solar & Wind Energy
Passive Solar Design
Energy Efficiency
Batteries & Inverters
Alternative Fuels &
Vehicle Showcase
Thermal Systems
Home Size, RV Size, &
Tie-In Systems
Off Grid & Net Metering
Wastewater Systems
Children's Activities

**For more information, contact:
Greater Flagstaff Economic Council**

1300 S. Milton Road
Flagstaff, Arizona 86001
1-800-595-7658
520-779-7658
fax 520-556-0940



Home Power's Business

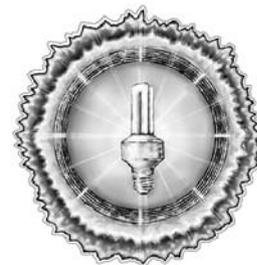

"The man who on his trade relies
Must either bust or advertise."

Sir Thomas Lipton — 1870

Display Advertising

Advertising Rates per Consecutive Insertion

	Single Insertion	Three Insertions	Six Insertions	Ad Area sq. in.
Full Page	\$1,500	\$1,350	\$1,275	64.1
Half Page	\$840	\$756	\$714	32.1
Third Page	\$600	\$540	\$510	21.4
Quarter Page	\$471	\$424	\$401	16.0
Sixth Page	\$334	\$300	\$284	10.7
Eighth Page	\$268	\$241	\$227	8.0
Twelfth Page	\$188	\$169	\$159	5.3

Four process color (CMYK) in any sized advertisement is a flat rate of \$185 per insertion. For inserts, and current subscriber/circulation demographics, please call us.

Home Power is published bi-monthly. The ad deadline for the Oct / Nov 99 issue (HP73) is 13 Aug 1999. Call 530-475-3179 for further details.

MicroAds

MicroAd rates are 10¢ per character. Characters include letters, numbers, spaces, and punctuation marks. \$15 minimum per MicroAd insertion. Send a check with your ad. We do not bill MicroAds.

Home Power magazine for Resale

Quantities of *Home Power* magazine are available for resale by distributors, newsstands, bookstores, energy businesses, and others. Please call, email, or write for rates and shipment specifics.

First Class Home Power Subscription

Get 6 issues of *Home Power* magazine via First Class U.S. Domestic Mail for \$36. Many of you have asked for faster delivery, so here it is: First Class *Home Power*. All First Class issues shipped in an envelope. We start your subscription immediately with the current issue.

International Home Power Subscriptions

Due to the high cost of international mailing, we charge more for *Home Power* international subscriptions.

1 YEAR (6 issues) INTERNATIONAL RATES:

All payments in U.S. currency ONLY!

Canada:	Air — \$36	Surface — \$30
Mexico:	Air — \$38	Surface — \$30
Western Hemisphere:	Air — \$40	Surface — \$30
Europe:	Air — \$53	Surface — \$30
Asia and Africa:	Air — \$64	Surface — \$30
Pacific Rim:	Air — \$64	Surface — \$30

Surface shipment may take up to three months. All international issues are shipped in mailing envelopes. International subs are best paid for by either VISA, MasterCard, or funds from a U.S. bank.

International orders: Call: 541-512-0201
Fax: 541-512-0343

Back Issues of Home Power magazine

Back issues through #20 are \$3.25 each (\$4.25 each outside USA) while they last. Sorry, no more issues #1–12, 14, 15, 16, 25, 35, 36, 38, 40, 41, 59, 60, 63, 64 & 67. Back issues of #21–45 are \$4.75 each (\$6 each outside USA). Back issues #46–current are \$5.75 each (\$7.25 outside USA). Back issues are shipped First Class mail. See the ad index for current *Home Power* back issue specials. Issues #1–42, #43–60, & 61–70 on CD-ROM for \$29 each (US\$32 outside USA) Win/Mac/Unix.

Second Class Home Power Subscription

Get 6 issues of *Home Power* via Second Class U.S. Domestic Mail for \$22.50. Second Class can be forwarded for one issue (2 months), so let us know immediately if you move! We start your sub with the next scheduled issue, so please allow ten weeks for your first copy to arrive.

ACCESS ➡ **Home Power, PO Box 520, Ashland, OR 97520 USA**


800-707-6585 or 541-512-0201 Subscriptions and Back Issues

530-475-3179 Advertising and Editorial • www.homepower.com



SUNWEAVER

Design and Installation of Independent & Back-up power
Serving New England Since 1985

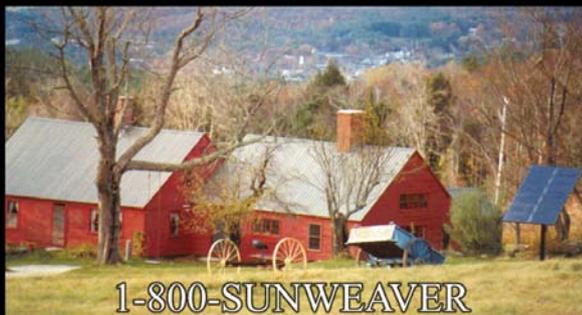


1-800-SUNWEAVER

Route 4 Northwood, NH 03261
Phone: 603-942-5863 ~ Fax: 603-942-7730
Web: www.sunweavers.com ~ e-mail: fonature@tiac.net

NEVER BE POWERLESS AGAIN! RENEWABLE ENERGY SOLUTIONS

- Wind Power
- Microhydro
- Solar
- Independent Power Systems

Pedal Your Way to Energy Independence!

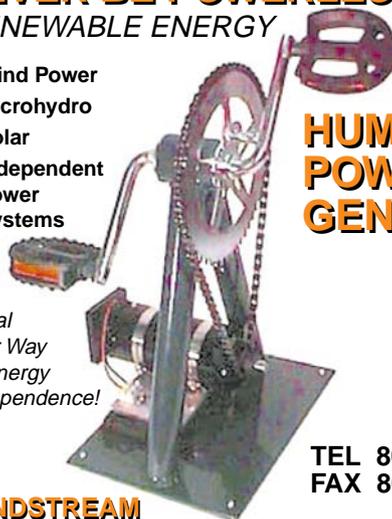

HUMAN POWERED GENERATOR

Easy to Use
Economical
Dependable
Fun!

TEL 802-658-0075
FAX 802-658-1098

WINDSTREAM POWER SYSTEMS INC.

PO Box 1604 HP, Burlington, VT 05402
25 Years in Business

e-mail: info@windstreampower.com
website: www.windstreampower.com

Phoenix Composting Toilet System

Odorless • Waterless • Large Capacity
Low Energy Requirements • Owner-Friendly

Advanced Composting Systems
195 Meadows RD
Whitefish, MT 59937
Voice: 406-862-3854
Fax: 406-862-3855
phoenix@compostingtoilet.com
www.compostingtoilet.com

Sunergy Systems, LTD
Box 70, Cremona AB TOM OR0
Voice/fax: 403-637-3973
sunergy@telusplanet.net
In British Columbia:
Voice: 250-751-0053
Fax: 250-751-0063



"APPY"

D.O.B. 9/7/98
Short Hair
Packer, Guard,
or Show Llama
\$950

C.W. Ranch • 775-463-2705 • 10-2 pm

RENEWABLE ENERGY with the EXPERTS

An Instructional Video Series
on the Basics of Residential Renewable Energy

Residential Solar Electricity with Johnny Weiss, 48 min. **\$39.95 each**

Johnny Weiss is one of the founders and teachers at Solar Energy International, in Carbondale, CO.

Residential Wind Power with Mick Sagrillo, 63 min.
Mick Sagrillo has installed and repaired over 1,000 wind turbines.

Residential Microhydro Power with Don Harris, 44 min. Don Harris has designed and manufactured over 1,000 microhydro power plants.

Batteries with Richard Perez, Editor in Chief and founder of *Home Power* magazine.


Solar Water Pumping with Windy Dankoff, 59 min. Windy Dankoff has been designing and installing solar-powered water pumping systems for 15 years.

Add \$5.00 shipping for international orders

Home Power, Inc., PO Box 275, Ashland, OR 97520
toll free in USA: 800-707-6585 • 541-512-0201

Fax: 541-512-0343

Web: www.homepower.com

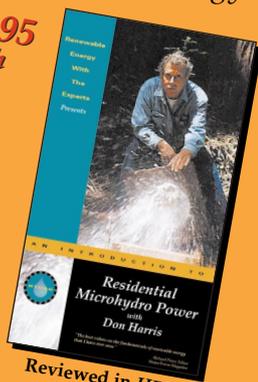

Reviewed in HP56

T-SHIRTS

Guerrilla Solar



Install by Night—Power by Day

Available on Black or Camo: \$15.00

International orders add \$5 for air shipping

Call, see our web site, or send check or money order

800-707-6585 (541-512-0201 Outside USA)


www.homepower.com

Home Power, PO Box 520, Ashland, OR 97520

Experience the Simple Elegance of
SUNSLATES®



We do turnkey systems for homes or resorts
& grid-intertie for net metering in the Rocky Mountain Region.



- Consulting
- Design
- Site Review
- Installation
- Service

Solar Plexus, 130 W. Front St., Missoula, MT (406) 721-1130

Dealers Wanted



Reliable People ...
Reliable Products ...
Reliable Power

SunWize Technologies is looking for experienced solar dealers who want to be a member of our team. Our dealer program includes:

- **Technical support**
- **Training seminars**
- **Cooperative advertising**
- **Lead distribution**
- **Large product inventory for same day shipping**
- **Complete catalog and design guide**

We pride ourselves in supporting our dealers with personal attention. Call our Dealer Sales Manager if you are interested in becoming an authorized SunWize representative at:

1-800-232-7652.

Visit our website at:
www.sunwize.com



SunWize uses Siemens' high-quality solar modules which are certified worldwide and backed by the longest warranty in the PV industry - 25 years!




Solar Village
Institute Inc.

Renewable Energy
Dealer, Installers, Educators
Solar, Wind & Micro Hydro Systems
Serving the Carolinas and Virginia.
Off grid since 1992

Solar Village Institute inc.
Chris and Lyn Carter
PO Box 14, Saxapahaw, North Carolina, 27340
fax/phone (336) 376-9530, voice (336) 376-9292
Email solarvil@netpath.net www.solarvillage.com

FUEL

for the
New Millennium:

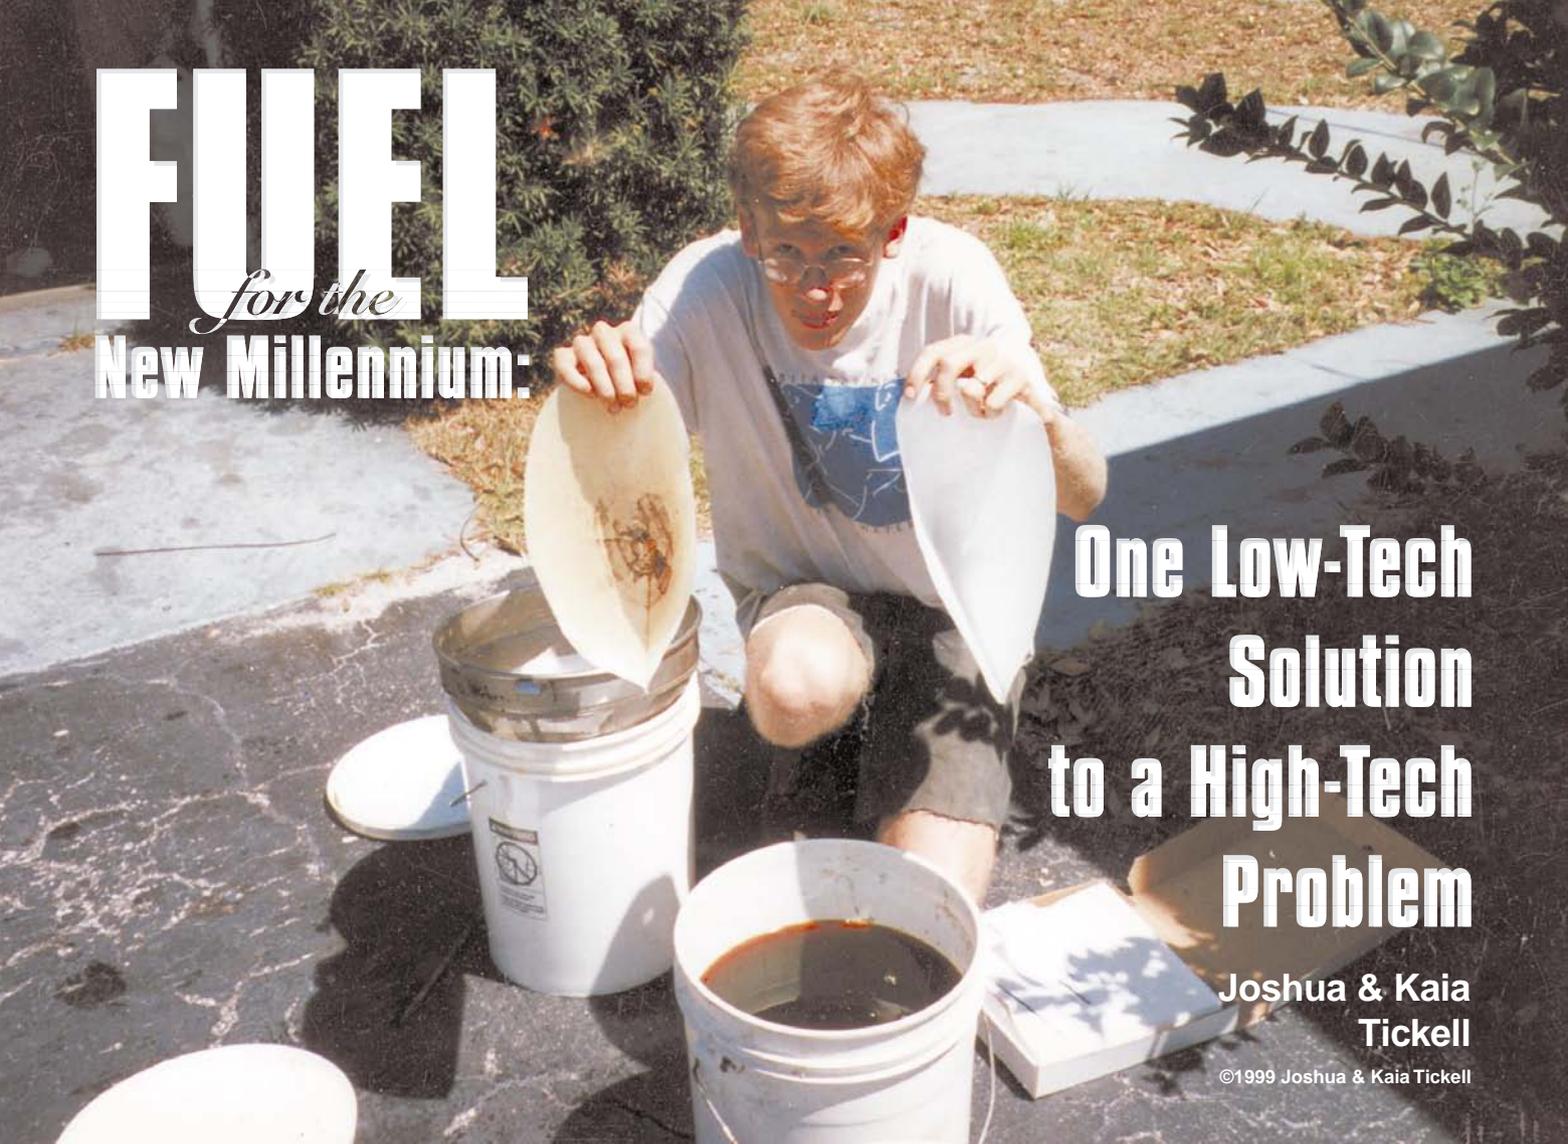

One Low-Tech Solution to a High-Tech Problem

Joshua & Kaia Tickell

©1999 Joshua & Kaia Tickell

Restaurant fryer filters are available at restaurant supply stores and are excellent for filtering food particles out of used cooking oil.

Making your own fuel from vegetable oil can be easy, cost-effective, and environmentally beneficial. What makes this fuel even more attractive is that you can make it from the waste vegetable oil produced in the United States every year, which amounts to more than three billion gallons. With a bit of know-how and persistence, you can run any diesel engine on vegetable oil.

Only diesel engines can run on vegetable oil-based fuels. This means that any engine that has spark plugs and is made for leaded or unleaded gasoline cannot use vegetable oil fuel. If you want a practical homemade fuel for a gasoline engine, you might consider making ethanol, methane, or wood gas.

Grow Your Fuel

We produce a large quantity of used vegetable oil in the United States, but there is an oilseed crop you can grow no matter where you live. The possibilities include coconut, soybean, canola (rapeseed), sunflower, safflower, corn, palm kernel, peanut, jatropha, and hundreds more. To learn which vegetable oil crop is best suited for your area, contact your state's office of agriculture, the agriculture department of a local university, or talk to local farmers.

One of the crops with the highest yield of oil per acre is canola. From just one acre of canola, you can produce 100 gallons (379 l) of vegetable oil. The most common oilseed crop in the U.S. is soybeans, which produce 50 gallons (189 l) of vegetable oil per acre.

Growing your own oilseed crop has an added bonus. The meal that is separated from the oil is an excellent source of protein. This meal can be used as animal feed or in breads, spreads, and other food products.

Pressing the oil from the seed does not require a large, expensive press. TabbyPressen of Sweden makes a

tabletop press for around US\$1,000. Although the press usually comes with a 240V/50 cycle electric motor, you can buy the press with a 120V/60 cycle motor from the U.S. distributor. The press looks like a powerful juicer. To operate it, pour the oilseed into the funnel and wait for the vegetable oil to pour out of the bottom. The meal oozes out of the side of the press.

The Three Ways to Use Vegetable Oil as a Fuel

Diesel engines that are found in cars, trucks, generators, boats, buses, trains, planes, pumping stations, tractors, and agricultural equipment can all run on fuel from vegetable oil. Pure vegetable oil, lard, and used cooking oil work just as well as diesel fuel.

Biodiesel

The most conventional method of running a diesel engine on vegetable oil fuel is to produce a fuel called biodiesel. Biodiesel is made by combining 10 to 20 percent alcohol with 0.35 to 0.75 percent lye and 80 to 90 percent vegetable oil. A very reliable reaction can be made with 80 parts new vegetable oil, 20 parts methanol, and 0.35 parts lye. These ingredients are mixed together for an hour and left to settle for eight hours.

After the chemical reaction is complete and the new products settle out, you have biodiesel fuel and glycerin soap. The fuel is yellow to amber in color and flows like water. The soap is brown in color and has the consistency of gelatin. The soap settles to the bottom, allowing you to pump, siphon, or pour off the biodiesel.

Veggie/Kero Mix

The second method for using vegetable oil in a diesel engine is to simply "cut" the oil with kerosene. This method is best suited for emergencies, heavy duty engines, and warm temperatures. Although it is possible to mix other petroleum products with vegetable oil, kerosene is most suited for the diesel engine.

Depending on ambient temperature, the blend of kerosene to vegetable oil will be anywhere from 10 percent kerosene and 90 percent vegetable oil to 40 percent kerosene and 60 percent vegetable oil. A fairly reliable blend is 20 percent kerosene to 80 percent vegetable oil.

The effectiveness and reliability of the veggie/kero method is increased by starting and cooling down the diesel engine on diesel fuel or biodiesel fuel. This can be accomplished by installing an extra fuel tank and switching to the veggie/kero mix when the engine is warmed up.

Straight Vegetable Oil

The third method for running a diesel engine on vegetable oil is to use straight vegetable oil. As with the



Our friend, Hugo Brown, pouring grease. A container of used cooking oil can be found behind most restaurants.

other methods, you can use either pure vegetable oil or used cooking oil. To ensure the reliability and longevity of your diesel engine, the engine must be started and cooled down on diesel or biodiesel fuel. This also requires the use of an extra fuel tank and a valve to switch between the tank of diesel or biodiesel fuel and the tank of vegetable oil. Think of it as a startup tank and a running tank.

The key to running a diesel on straight vegetable oil is to heat the vegetable oil at every stage—in the fuel tank, fuel hose, and fuel filter. The vegetable oil must be heated to at least 70°C (160°F).

Most diesel engines have hoses that carry hot coolant. This coolant can be channeled to heat the vegetable oil hoses, tank, and filter. You can make simple modifications to the coolant hoses. These modifications combined with some extra fuel and oil hoses, an extra fuel tank, and an electrically operated switch will allow you to run your diesel engine on straight vegetable oil.

Fuel Comparison

The chart will show you the differences between the three vegetable oil fuel methods. As you can see, biodiesel is a good substitute or additive fuel for diesel fuel. Veggie/kero mix is decent for use as an emergency fuel. And using straight vegetable oil is good if you have the time and know-how to properly modify

Comparison of Different Vegetable Oil Fuel Methods

Property	Biodiesel	Veggie/Kero Mix	Straight Veggie Oil
Can be used as lubrication additive to diesel fuel	yes	no	no
Requires vehicle modification	no	yes	yes
Reliably cuts emissions in all diesel engines	yes	no	unknown *
Considered an alternative fuel under the United States Energy Policy Act (EPACT)	yes	no	yes **
Simple way to run a vehicle in an emergency	no	yes	no
Stable fuel at room temperature	yes	no	no
Requires added chemicals to produce	yes	yes	no
Requires startup tank of biodiesel or diesel fuel	no	yes	yes
Good startup fuel	yes	no	no
Better lubrication than diesel fuel	yes	yes	yes
Gels in cold weather	yes	yes	yes
Covered by many engine warranties	yes	no	no
Can be made from used cooking oil	yes	yes	yes
Can be made from pure vegetable oil	yes	yes	yes
Safe to store and handle, biodegradable, won't spontaneously ignite, and non-toxic	yes	no	yes
Works in all diesel engines	yes	yes	yes
Can be reliably mixed in any proportion with diesel fuel without vehicle modification	yes	no	no
Approved for use by EPACT in a 20% mix with 80% diesel fuel ***	yes	no	no
Engine life, power, torque, fuel mileage, and overall performance are relatively unaffected	yes	yes	yes
Can clog fuel injectors if used improperly	no	yes	yes
Requires heating for operation at any temperature	no	no	yes
Tested and documented by U.S. universities	yes	no	yes
Possible substitute for home heating oil in furnaces	yes	no	no
Can be used in Petromax brand and similar lanterns and stoves	yes	no	yes

* No recent U.S. University studies have been published on this.

** Under EPACT regulations, any biologically-derived fuel is considered an alternative fuel.

*** EPACT legislation states that a fleet must use a minimum of 450 gallons (1703 l) of biodiesel per year.

your engine's heating and fuel tank systems. Diesel engines are used in many different situations. For each situation, there is a way to make fuel from vegetable oil.

How to Make Biodiesel

This section outlines the process for making biodiesel fuel from new vegetable oil or used cooking oil. This fuel can be made in a blender or in a larger, homebuilt mixer. The materials you'll need are vegetable oil, methanol, and lye.

If you are using new vegetable oil, always use 3.5 grams of lye per liter of oil. Since each batch of *used* cooking oil is different, the amount of lye in each batch of biodiesel will be different. To ensure that you are using the correct amount of lye, make a small test batch of biodiesel in a blender before attempting a reaction in a large mixing tank. For the test batch, use 100

milliliters of vegetable oil and 20 milliliters of methanol. Then you must determine how much lye to use.

If you are using used vegetable oil, use 0.45 grams of lye for the first test batch. If this batch makes biodiesel and glycerin, use the same proportions for the large batch reaction. If the test batch does not form two distinct layers, increase the amount of lye to 0.55 grams and make another test batch. If this batch is unsuccessful, make another batch and increase the amount of lye to 0.65 grams. If that batch is unsuccessful, make another batch with 0.75 grams of lye. Make sure you can make biodiesel on a small scale before attempting a large reaction.

Once you have made a successful small test batch of biodiesel, multiply the number of grams of lye you used by ten to see how much lye you will need for each liter of oil in the large reaction. For example, if you used 0.55 grams of lye in the test batch, you will need to use 5.5 grams of lye per liter of used cooking oil for a large reaction.

Here is the basic procedure for making biodiesel fuel. Read the safety information at the end of this article before you begin.

1. Purchase or collect new or used vegetable oil.
2. If the oil is used cooking oil, use a restaurant fryer filter to remove burned food bits, etc.
3. Purchase some methanol alcohol from a local racetrack or chemical supply store. Ethanol alcohol can also be used, but the process is different.
4. Purchase some granulated lye (Red Devil is one brand) or caustic soda sold as a drain cleaner from the hardware or grocery store. It must be pure sodium hydroxide (NaOH).
5. Measure the amount of vegetable oil you want to use in liters. We will call this number V. Pour the vegetable oil into the mixing container.
6. When the temperature is below 70°F (21°C), or when the vegetable oil is solid or lumpy, it will be


necessary to heat the reactants before, during, and possibly after the mixing. The ideal temperature to attain is 120°F (49°C). A fish tank heater will heat 10 to 30 gallons (40–120 l) of reactants. For larger batches of biodiesel, a water heater element can be mounted in a steel biodiesel mixing tank. Make sure that you follow the manufacturer's directions and safety precautions when adding any electrical device to the system. Be careful when heating vegetable oil in a plastic container. Polyethylene cannot withstand temperatures above 140°F (60°C).

7. Multiply $V \times 0.2$. The result will be the amount of methanol you will need in liters. We will call this number M.
8. To determine how much lye you will need to use for new vegetable oil, multiply V times 3.5 grams. For used vegetable oil, use the number of grams of lye you got in the small test batch. For example, if you used 0.55 grams of lye in the test batch, you will multiply V times 5.5 grams of lye. Call this number L.
9. Carefully pour L grams of lye into M liters of methanol. Stir until the lye is dissolved in the methanol. Be careful, this creates a toxic substance called sodium methoxide.
10. Pour the sodium methoxide into the vegetable oil right away. Stir vigorously for one hour.
11. Let the mixture settle for eight hours.
12. Pump the biodiesel from the top, or siphon it off with a hand siphon. Or if you are lucky enough to have a container with a spigot, open the spigot and drain the bottom layer of glycerin. The glycerin will be much thicker and darker than the top layer of biodiesel.
13. Allow the glycerin to sit in the sun for a week. After that, the trace methanol will be evaporated. You have made a nice glycerin soap. You can scent it with the fragrance of your choice, add other soap agents as desired, or just use it as it is. This soap is especially good for cleaning grease off your hands and cleaning greasy equipment!
14. Make sure your biodiesel goes through a 5 micron filter before entering your diesel engine.

A Simple Biodiesel Processor

The simplest way to make a biodiesel processor is to use a 55 gallon (208 l) steel drum and some sort of mixer. The mixer can be a circulating pump, such as a sump pump, or it can be an electric mixer for chemicals, specially made for drum stirring.

Making Biodiesel Flow Chart

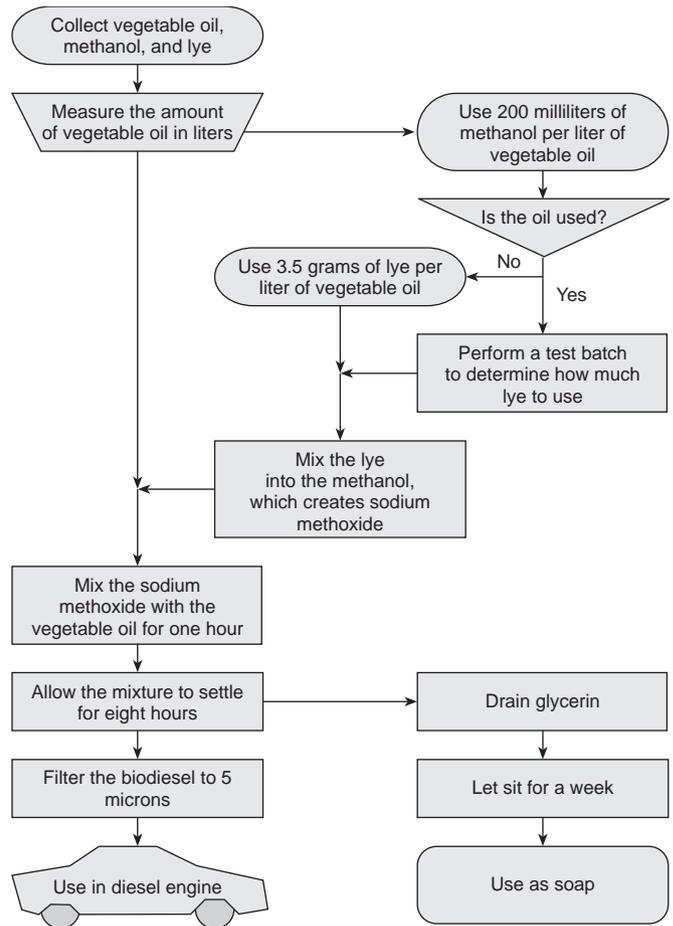

A pump or stirrer will cost about US\$200 if you buy it new, but you can build your own instead. With a bit of ingenuity, you can build a biodiesel processor that is inexpensive and effective. Tim Garrits of Kelseyville, California built such a processor from mostly recycled parts for under US\$50. A simple biodiesel processor can be built from the following parts:

- A 55 gallon (208 l) metal drum.
- A 1/2 hp electric motor.
- Two pulleys that give about 250 to 400 rpm at the mixer blade.
- A belt that goes around both pulleys.
- A rolled 2 inch (5 cm) rod for the mixer shaft.
- A propeller made from two shelf brackets, welded to either side of the rolled 2 inch rod. The shelf brackets look like two opposed "L"s and form a propeller about 14 inches (36 cm) in diameter. Basically any propeller-shaped metal would do, if it is made from about 12 or 14 gauge steel.

- A 3/4 inch (19 mm) brass ball valve for draining the glycerin.
- A hinge and piece of wood acting as a belt tensioner.
- A 2,000 watt electric water heater element.
- A water heater thermostat.
- Wood, screws, bolts, and other assorted mounting hardware.

A Note of Caution

You are dealing with dangerous chemicals when you make biodiesel. Both methanol and lye are strong bases. They can deaden nerve endings and cause permanent damage. For this reason, chemical resistant gloves, aprons, and eye wear should be worn when dealing with methanol and lye. Shoes, long sleeve shirts, and long pants are a must.

Keep both methanol and lye in clearly marked containers. We recommend putting a skull and crossbones on them and writing something to the tune of "Danger! Toxic! Do Not Eat!" in addition to the contents.

Sodium methoxide, the chemical combination of lye and methanol, is even more toxic than the separate components. Keep this stuff away from any exposed skin. Do not let children play in or around biodiesel equipment. Remember, although you are creating two chemically benign substances when you make biodiesel, you are using dangerous chemicals in the process.

Always keep safety in mind when preparing a biodiesel reaction. Have a faucet or hose nearby. Keep some vinegar handy to neutralize any methanol or lye that may spill. If you take the time to prepare and follow safety guidelines, your biodiesel reaction will go smoothly and you should have no problems.

Fuel Tax & Engine Specifications

If you live in the U.S., you are responsible for paying the IRS for any on-road fuel that is not taxed at the pump. If you live outside the U.S., it would be wise to check with local authorities as to taxation.

You are responsible for any damage that may result to your engine if you use a fuel that does not meet your engine manufacturer's specifications.

Go For It!

Disclaimers aside, biodiesel is used all over the world. Island people are making biodiesel from coconut oil, some countries are experimenting with biodiesel from hemp seed oil, and many others are using canola oil. Millions of miles of road tests have been done with this

fuel. Tests have shown less wear on the internal components of engines using biodiesel.

Biodiesel is a reliable, exciting fuel that you can make. If you are worried about your diesel engine, you can install an extra fuel filter system from Racor or a similar aftermarket parts manufacturer. After traveling over 25,000 miles (40,000 km) on biodiesel made from used cooking oil, we continue to choose and recommend biodiesel over toxic, carcinogenic petroleum diesel fuel.

Complete instructions, diagrams, photos, and parts lists for the three methods of running a diesel engine on vegetable oil and building a biodiesel processor are included in the new, second edition of *From the Fryer to the Fuel Tank*.

Access

Author: Joshua & Kaia Tickell, GreenTeach, PMB 311, 15 Paradise Plaza, Sarasota, FL 34239 USA
biodiesel@best.com • www.veggievan.org

New Second Edition! *From the Fryer to the Fuel Tank: The Complete Guide to Using Vegetable Oil as an Alternative Fuel* by Joshua and Kaia Tickell, US\$29.95 postpaid (outside USA add US\$5) from BookMasters, PO Box 388, Ashland, OH 44805 • 800-266-5564 or 419-281-1802 • Fax: 419-281-6883
order@bookmaster.com • www.bookmasters.com

The Green Wire, a free email newsletter covering homemade fuel and more:
www.veggievan.org/greenwire

Diesel fuel filtration and heating equipment manufacturer: Racor Division, PO Box 3208, Modesto, CA 95354 • 800-344-3286 or 209-521-7860
Fax: 209-529-3278 • kedge@parker.com
www.parker.com/racor

Plastic products, electric drum mixers, & sump pumps: United States Plastics Corp., 1390 Neubrecht Rd., Lima, OH 45801 • 800-537-9724 or 419-228-2242
Fax: 800-854-5498 or 419-228-5034
usp@usplastic.com • www.usplastic.com

TabbyPressen Type 20, U.S. dealer: Magic Mill, 382 Route 59, Sec. #338, Monsey, NY 10952
914-368-2532 • Fax: 914-368-2533
magicmil@mail.idt.net • www.oilpress.com

Tim Gerrits, Tim Gerrits Designs, PO Box 493, Kelseyville, CA 95451 • hpbioid@kelseyville.com
www.kelseyville.com/biodsl





Discover the Power of Solar Energy

**Saturday,
October 16, 1999**

The National Tour of Solar Homes is an opportunity to see how solar energy is working today. Since 1993, thousands of people have visited solar homes in their communities. They have felt the warmth of a sunroom, washed their hands in solar heated water, and watched the meter run backward on a PV-powered home.

**Discover the practical
benefits of solar energy
on the National Tour
of Solar Homes.**

**Sponsored by the
US Department of Energy,
BP Solarex, AstroPower,
Interstate Renewable Energy Council,
and Home Power magazine.**

For information or to find a tour near you, contact:

American Solar Energy Society

2400 Central Avenue, G-1
Boulder, CO 80301

Phone: 303/443-3130

Email: ases@ases.org

Website: www.ases.org



Solar Energy International

Call for
Complete
Catalog

Photovoltaics
Wind Power
Microhydro Power
Solar Home Design
Natural House Building
Straw Bale Construction
Solar Cooking
RE for the Developing World
Successful Solar Businesses



Workshops in Carbondale, CO


Advanced Photovoltaics Aug. 9–20
Successful Solar Businesses Aug. 7–8

Workshops in the Beautiful San Juan Islands of WA

Renewables for the Northwest, WA Oct. 3
PV Design & Install, WA Oct. 4–9
Microhydro Power, WA Oct. 11–15

NEW! PV Design On-Line

On the Web (6 weeks) Begins Aug. 30
On the Web (6 weeks) Begins Nov. 1

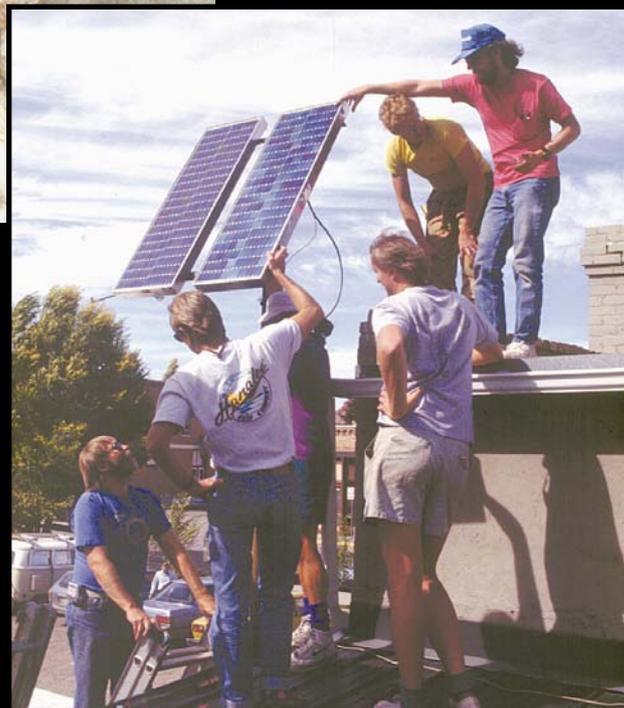


Hands-On Education • Sustainable Development

voice: (970) 963-8855 • fax: (970) 963-8866

e-mail: sei@solarenergy.org • web: www.solarenergy.org

P.O. Box 715, Carbondale, Colorado, USA 81623

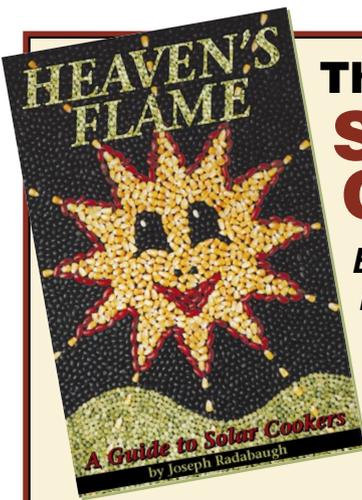

The Book on Solar Cookers

Back by Popular Demand

A second edition, fully updated and revised.

Includes:

- A history as well as a who's who in the solar-cooking movement
- Guidelines for designing your own cooker
- Plans for building the **SunStar** cooker with salvaged and inexpensive materials
- Tips and tricks for cooking with the sun

With 200 Photographs & Diagrams

\$15

Call Home Power Publishing
800-707-6585

Outside USA add \$5 for air shipping

Outside USA 541-512-0201




100% Cotton Good Shirts!

T-Shirts

Sizes: S, M, L, XL, XXL

Full Color on Natural Shirt
\$15.00

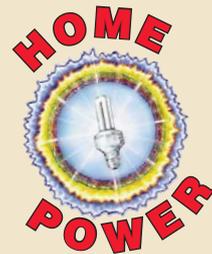

International orders add \$5 for air shipping


To Order Call: 800-707-6585
(541-512-0201 Outside USA)

Or see our web site:
www.homepower.com

Or send check or money order to:
Home Power Magazine
PO Box 520, Ashland, OR 97520



Some black & white shirts are still available: call for price and size.

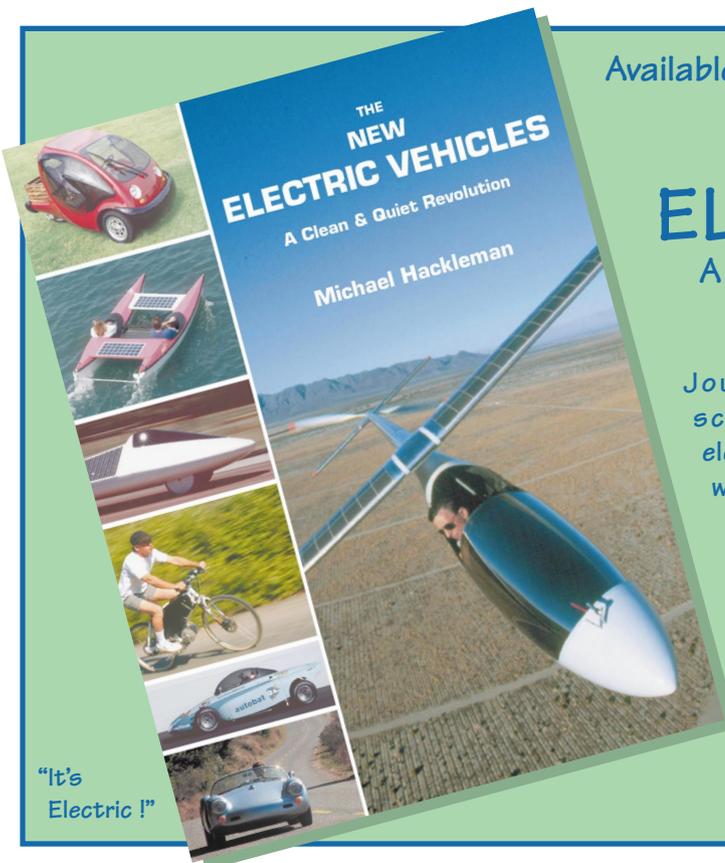

Available Now! Only \$25 (outside USA add \$10 for air-mail shipping)

THE NEW ELECTRIC VEHICLES

A Clean & Quiet Revolution
by Michael Hackleman

Journey into the world of conversions, scratchbuilts, human-electrics, solar cars, electrathon racers, planes & boats—all powered with electricity.

272 pages of EV technology, 465 photographs (over half in color), and detail on 65 vehicles. Includes 115 technical design and construction sidebars.

To order Call: 800-707-6585

Outside USA call 541-512-0201 • Fax: 541-512-0343

or write to:

Home Power Publishing
PO Box 275 • Ashland OR 97520



"It's Electric!"

The Acid Test: EV Batteries

Shari Prange ©1999 Shari Prange



The most frequently asked electric vehicle question is, “What’s the best battery?” The question is short and simple, but the answer is long and complex. I’m going to try to simplify it for you.

The best battery for your car depends on your priorities. Do you need lots of miles or lots of speed and acceleration? Is the limiting factor your available space for batteries, or is it your budget? We’ll look at several characteristics of the most commonly used batteries and compare them. You’ll see that many of these characteristics are inextricably intertwined.

Types of Batteries

For now, we’ll limit ourselves to batteries using lead-acid technology. We can narrow the field further by eliminating some types of batteries that simply aren’t appropriate for electric vehicles. For example, the conventional starting battery in a gas car is designed for a high current output and a very brief, shallow discharge. On the other hand, an RV battery or marine trolling battery is designed to tolerate repeated deep discharges, but at a fairly low current draw. Neither of these will hold up for long in the high current draw, deep discharge application of an electric car.

The Conventional Conversion Standard

As our baseline, we’ll use the flooded 6 volt golf car battery. “Flooded” batteries have a large amount of liquid electrolyte in them. They have access caps so you can periodically check and top off the fluid level. The golf car battery is a true traction

battery, designed to move a vehicle and hold up under both high current draw and deep discharge. This has been the workhorse of EV conversions for decades, the most common choice by a wide margin.

There are only a handful of manufacturers building these batteries, and two of them dominate the market: U.S. Battery and Trojan Battery. Most other brands that you see are built by one of these and sold under different labels. For example, Interstate golf car batteries are manufactured by U.S. Battery.

There are a few different models of golf car batteries. They vary slightly in size and weight, with the larger, heavier ones having more capacity. The most commonly used models are the mid-range ones, generally rated for 230 to 235 amp-hours at the 20 hour rate. We’ll talk more about rates later.

Other Lead-Acid Batteries

There are only a few other types of lead-acid batteries that are actually in production and appropriate for EV conversions. In addition to the flooded 6 volt models, there are also flooded 8 volt and flooded 12 volt traction batteries.

Another type is the “maintenance free” battery. These are also variously called starved electrolyte, valve regulated, or absorbed glass mat (AGM) batteries. Unlike flooded batteries, they have relatively little liquid electrolyte, which is held against the plates in mats. They cannot be opened for service. For electric cars, these include 12 volt batteries from Optima Battery and Hawker Energy Products.

Although these batteries are commonly referred to as “sealed,” Bill O’Brien, EV specialist for Hawker, says that they are not truly sealed. It’s true that there is no cap to open for adding water, and if you turn them upside down, nothing will

run out. However, it is necessary for the batteries to be able to vent if pressure builds up inside from overheating, which can occur if the battery is overcharged. A valve allows this to happen in a controlled manner. We can continue to call them "sealed" batteries for convenience, as long as we understand the reality.

Range

Many people consider range to be the most important feature of a battery. To determine how far the EV can go before it has to be recharged, we have to acknowledge that range is affected by many things. Some of them have nothing to do with the batteries directly, such as terrain, traffic flow, vehicle weight, and driving style.

Batteries are used in packs, not as individual units. If you are comparing single batteries, you can compare amp-hour ratings, but in packs, you have to consider other factors. When wired in series, with the negative post of one battery connected to the positive post of the next, the voltage increases with each battery added, while the amp-hour capacity remains the same.

Even though adding more batteries does not change the amp-hour capacity of the pack, it does extend range by spreading the load over more batteries. A car with a higher voltage system will not draw as much current, so it will have a higher range than a car with a lower voltage system with the same type of batteries. The batteries are not being discharged as deeply in the high voltage system.

Similarly, look at two cars with the same system voltage—one with a single pack of batteries, and the other with two packs wired in parallel. The twin-pack car will have the higher range because it has split the current demand between the two packs. The range will actually be more than double compared to the range of a single string, because the relationship between range and current capacity is curved instead of linear.

In parallel wiring, connections are made negative to negative and positive to positive. Unlike series wiring, this increases the amp-hour capacity of the system rather than increasing the pack voltage. You can have two packs of batteries, with batteries wired together in series within each pack, and the two packs wired together in parallel. Or you can have pairs of batteries wired together in parallel. These pairs are then treated as single battery units, and the pairs are wired in series into one big pack.

With these things in mind, we can look at the differences between individual battery models. We can think in terms of how many batteries of one type it would take to equal the range of another type.

Measuring Capacity

Range capacity is measured in different ways. The most common ratings are the 20 hour rate and the 75 amp rate. First we'll talk about the 20 hour rate. This refers to the level of constant current draw that a battery can sustain for twenty hours. The rating equals hours times current draw. For example, a 220 amp-hour battery can sustain a draw of 11 amps for 20 hours ($11 \times 20 = 220$).



Even traction batteries, which are designed to withstand heavy loads, will give their best performance if they are discharged slowly at a low current draw. The battery's capacity, when measured at the 20 hour rate, is expressed in amp-hours (AH). The golf car battery that is most commonly used in EVs is a 230 AH or 235 AH model.

However, the 20 hour rate doesn't represent the way the batteries are used in electric cars. A one or two hour rate would be more appropriate, but these numbers are not always available, so it can be difficult to compare between manufacturers. You can't extrapolate this information from the 20 hour rate, because it is not a simple linear relationship. In fact, almost nothing about batteries is a simple linear function.

What is often available from battery manufacturers is the 75 amp rate. This is expressed in minutes. It represents how many minutes the battery can provide a steady 75 amp current. The 230 AH golf car batteries mentioned earlier are rated for 132 minutes at the 75 amp rate. This rating system still isn't really well matched to an EV conversion, since many of these cars will draw twice that much current or more just to maintain a cruising speed, but it's much closer than the 20 hour rate.

Making Comparisons

If you can get ratings for different voltage batteries on the same scale, you can get an approximate idea of the range difference between them by comparing watt-hours (WH). This is volts multiplied by amp-hours. For example, a 6 volt 230 AH battery has 1,380 WH of capacity. By comparison, an 8 volt 165 AH battery has 1,320 WH of capacity.

Even if you have the same rating for two different batteries, you can't be sure you're comparing apples to apples. Under the best manufacturing and testing conditions, there is still considerable variation among batteries. Do the published ratings represent the capacity of the average battery in that model, or the best ones?

According to Nawaz Qureshi, battery engineer for U.S. Battery, it is also important how a battery is tested. A battery that yields a 100 AH rating at ambient temperatures will yield

Battery Specifications

Manufacturer	Model	Volts	Length	Width	Height	Weight	20 Hr Rating
U.S. Battery	US-2200	6	10.25"	7.125"	11.125"	63 lbs	220 AH
U.S. Battery	US-125	6	10.25"	7.125"	11.125"	67 lbs	230 AH
U.S. Battery	US-145	6	10.25"	7.125"	11.875"	70 lbs	245 AH
Trojan Battery	T-105	6	10.375"	7.125"	11.875"	62 lbs	225 AH
Trojan Battery	T-125	6	10.375"	7.125"	11.188"	66 lbs	235 AH
Trojan Battery	T-145	6	10.375"	7.125"	11.500"	72 lbs	244 AH
U.S. Battery	US-8VGC	8	10.25"	7.125"	11.125"	64.5 lbs	165 AH
Trojan Battery	T-875	8	10.375"	7.125"	11.188"	63 lbs	150 AH
Trojan Battery	T-890	8	10.375"	7.125"	11.188"	69 lbs	165 AH
U.S. Battery	EV-145	12	13.625"	6.75"	12.25"	87 lbs	145 AH
Optima Battery	Yellow Top	12	10"	6.8"	7.8"	42.9 lbs	65 AH
Optima Battery	31	12	13"	6.8"	9.5"	72 lbs	90 AH
Hawker Energy	Genesis G42	12	7.775"	6.525"	6.715"	32.9 lbs	47 AH
Hawker Energy	Genesis G70	12	13.020"	6.620"	6.930"	53.5 lbs	74 AH

115 AH if heated. Another battery from a different manufacturer that provides 115 AH at ambient temperatures will give close to 130 AH if heated. Both may be officially rated at 115 AH. However, you may not be able to find out the temperature at which the rating was done.

So how do you tell the difference? One clue is weight. If two batteries have the same rating but one is a couple of pounds heavier, it has more active material in it, which means it has more capacity.

You can get a rough idea of expected range for your vehicle by multiplying its actual gas mileage by the weight of your battery pack, then dividing by 420 for carbureted cars, or 450 for fuel-injected cars. This is a handy equation, since the gas mileage number will take into account terrain, traffic, chassis weight, and driving style. I don't know why it works, but this equation is commonly passed around among EV hobbyists. Applying it to various conversions of known range has shown that it does give a pretty accurate rough approximation. With EV range, it's hard to get more precise than that.

Size & Weight

This leads to the next two battery characteristics—size and weight. As I mentioned at the beginning, they are interrelated with range. If you need a long-range car, you want as much

battery capacity (which means *weight*) as your chassis can safely handle.

But if your range needs are modest and your chosen vehicle has limited space or strength, minimizing the battery's size and weight may be more important to you than its capacity.

The top speed of the car will be determined by the motor's power curves, the gearing of the transmission, and the voltage of the battery pack. For the most commonly chosen cars and components, this means you need at least a 96 volt system for low freeway speeds. Higher voltage will give you higher speed. Most street conversions stop at 144 volts, because beyond that you get into a different category of components and greater expense.

Obviously, if you use 8 volt or 12 volt batteries, you will need fewer of them to reach your desired pack voltage. A 12 volt battery will allow you to reach the same top speed with a physically smaller and lighter battery pack. The tradeoff is range.

The 6 volt golf car batteries are all close to the same dimensions, as you can see from the accompanying chart. The 8 volt flooded batteries have the same dimensions as the 6 volt, but they have four cells crammed into the battery instead of three. In addition, U.S. Battery has a flooded 12 volt battery called the EV 145, which is a true traction battery.

Among the sealed batteries, the Optima Yellow Top and the Hawker Genesis are the most popular models. Optima is also just coming out with a model #31, which Optima EV sales account manager Randy Hively says won't be officially released until late 1999, although some beta test units are already circulating. We'll look at situations where the Optimas really shine next time.

Sealed batteries are somewhat more compact than flooded versions. The Optima Yellow Top uses circular cells, and resembles a beverage six-pack in size and shape.

Crunch the Numbers

Now you can play with these batteries on paper. Substitute one model for another, and see what happens. For example, start with a basic pack of sixteen 6 volt flooded golf car batteries of the mid-range model. This gives you a 96 volt pack weighing 1,056 to 1,072 pounds (479–486 kg) with a 20 hour rating of 230 to 235 AH.

If you hold the pack voltage constant, you could switch to 8 volt batteries, and you would only need to use twelve of them. Your 96 volt pack would take up only 75 percent as much space, weigh 756 to 828 pounds (343–376 kg) and have a 20 hour rating of 150 to 165 AH. This would make sense if you are short of space, or if your chassis can't support the weight of the 6 volt pack, but your range needs are small.

You could go one step further and use the flooded 12 volt batteries, in which case you would only need eight of them. You would have much less range than with the pack of 6 volt or even 8 volt batteries, but you would save even more weight and space, which may be critical for your EV.

Taking a different approach, you could use the same number of 8 volt batteries as there were in the 6 volt pack, which would raise total voltage to 128 volts. Craig Quentin, Trojan battery engineer, notes that this would give you close to the same range as the 96 volt pack of 6 volt batteries, with a higher top speed. The batteries would take up the same amount of space, weigh 1,008 to 1,104 pounds (457–501 kg), and have a 20 hour rating of 150 to 165 AH.

The lower amp-hour rating would be offset by approximately the same weight of active material and a higher voltage system, which means a lighter current draw. Since the packs are different voltages, you need to compare watt-hours. The 96 volt pack of 6 volt batteries will have 22 to 22.5 KWH, while the 128 volt pack of 8 volt batteries will have 19.2 to 21.1 KWH.

Another option would be to put two strings of sealed Optima 12 volt Yellow Top batteries in the same space as a single string of 6 volt golf car batteries. You would still have a 96 volt system with a weight of only 720 pounds (327 kg). The twin strings would essentially double your usable capacity to 130 AH, or 12.5 KWH. You would need three parallel 96 volt strings of Optimas to approach the range of a single string of 6 volt batteries. However, if you have very limited space for batteries, and don't need much range, this setup would give you very good performance.

What's Best For You?

To decide which setup is best for you, first you have to establish your parameters. You might say, "With the components and gearing of my car, I know I need at least 96 volts for an acceptable top speed. My chassis can handle up to 1,100 pounds (499 kg) of batteries. I realistically need a reliable 40 mile (65 km) range."

Then start playing with the numbers for different types of batteries. Which ones will give you the pack voltage you want, will physically fit in the car, and are within your weight limits? Take the weight of this battery pack and plug it into the earlier formula along with your gas mileage, and see if it will give you the range you want.

Capacity, size, and weight are only a few of the critical characteristics of batteries, but they are at the top of the list for many people. Next time we'll talk about some other issues, including cost, cycle life, acceleration, charging, and maintenance.

Access

Author: Shari Prange, Electro Automotive, PO Box 1113-HP, Felton, CA 95018-1113 • 831-429-1989
shari.prange@homepower.com • www.electroauto.com

Hawker Energy Products, Inc., 617 N. Ridgeview Dr., Warrensburg, MO 64093 • 800-730-7733 or 913-362-4898 • Fax: 913-362-3993 • info@hepi.com
www.hepi.com

Optima Batteries, 17500 East 22nd Ave., Aurora, CO 80011
800-292-4359 or 303-340-7440 • Fax: 303-340-7474
sales@optimabatteries.com • www.optimabatteries.com

Trojan Battery Co., 12380 Clark St., Santa Fe Springs, CA 90670-3804 • 800-423-6569 or 562-946-8381
Fax: 562-906-4033 • Technical: Jim Lee, Applications Engineer, phone ext. 301 • j.lee@trojan-battery.com
www.trojan-battery.com

U.S. Battery Mfg. Co., 1675 Sampson Ave., Corona, CA 91719-1889 • 800-695-0945 or 909-371-8090
Fax: 909 371-4671 • Technical: Nawaz Qureshi, VP of Engineering, nqureshi@usbattery.com
www.usbattery.com




*"...standard equipment
for a lead-acid battery system..."*

Richard Perez, Home Power Magazine

PulseTech® battery maintenance systems clean the working parts of your battery...and here's the

VISIBLE PROOF!



These are crystallized sulfur molecules on a typical lead-acid battery plate. These "sulfates" reduce your battery's capacity, shorten its lifetime, and interfere with energy efficiency... bad news for your battery.



Here's the same plate 18 days later, after installing a PulseTech® battery maintenance system. The plates are clean. This battery's storage capacity increased 250%, without the use of costly equalization charging... good news for your bottom line.

Extend the Life of your Batteries!

Accept no substitutes; the cost effective **PowerPulse®** units are patented, approved by the U.S. Military, and have a ten-year limited warranty.



Eight ounces of prevention!

**12 Volt
\$69.95***

**24 Volt
\$119.95***

**Manufacturer's suggested retail price.
Other voltage units available.*

- Free delivery to 50 States. ■ VISA/MasterCard OK!
- Bulk/Dealer inquiries invited.

Don't overlook these energy specials!

Beat the clock!
with our **Electricity To Go™**
pre-assembled power package.
Unload the equipment skid
for instant AC power
from \$16,114 and up

Abraham Solar Equipment

800-222-7242 ■ 970-731-4675

124 Creekside Place ■ Pagosa Springs, CO 81147

THE POWER BROKERS!™



SIEMENS

SUN
FROST

EXELTECH



No Power? No Problem!

Solar • Microhydro • Wind Power • Water Pumping • Remote Communications

We do it all and we do it right!

There is more to a working renewable energy system than a cheap deal on a pile of hardware. While other companies may seem to be cheaper, none are better at building the right, and most cost-effective, RE system for you.

Electron Connection offers: load analysis, site survey, system design, sales, installation, user training, and tech support long after the warranties expire. We live on renewable energy, have over 17 years of experience, and have established over 300 systems. We specialize in NEC® compliant, safe systems that will make your Electrical Inspector smile!

Complete service including installation: We have done systems from Ketchikan, Alaska to Baja California. We have a network of qualified, competent Electron Connection associates across the country. If you need installation or design assistance we will refer you to one in your area. We do it all and do it right the first time!

Equipment via mail order: We offer reasonable deals and technical reality checks. Why settle for a packaged system when you can have yours custom designed by the experts?

Dealers / Installers: Why talk to a “technician” when you can talk to an electrician? We spend half our time in the field installing the equipment we sell you. We KNOW how the systems work and offer technical support, system design assistance, prompt shipment, fair pricing, and NO BULL. Local Referrals. Electrical competence is required. Write today for your dealer application.

Electron Connection

PO Box 203,
Hornbrook, CA 96044 USA
Voice • Fax: 530-475-3401
E-mail:
econnect@snowcrest.net
Web Page:
www.electronconnection.com
CA Electrical Lic #613554



- Photovoltaics — Siemens - BP - Solarex
- High-Quality Batteries — Trojan - GNB
- Power Inverters — Trace - Exeltech
- Instrumentation — Cruising - Fluke - Wavetek
- Charge Controls — Heliotrope - Trace
- Trackers & PV Mounts — WattSun - Zomeworks - Direct Power
- Microhydro Electric Powerplants — ES&D - Harris Hydro - Lil Otto Hydroworks!
- Wind Generators — World Power Tech - Southwest Windpower
- Pumps — Dankoff Solar - Solarjack - SHURflo
- Water Heaters — Myson - Aquastar
- Efficient Lighting — Phillips - Osram - S&H
- Safety Gear — APT - Heinemann - Cutler & Hammer - Square D Products
- Radiotelephones



1-800-945-7587

You don't need a battery system monitor to get your renewable energy system to work!

Every system needs one to keep it working well.

A monitor will show when you need to recharge your batteries before the inverter shuts off your power.... much better for your batteries!

You'll save energy by becoming familiar with how much your appliances draw. A monitor will reveal "phantom loads" that steal power 24 hours per day.... and it could help you save more energy than one solar panel will produce—at about half the cost.

If something isn't working right it will help you discover what's wrong.

And the **TriMetric** will remind you to charge (and equalize) the batteries if they haven't been fully charged for a number of days (You program the number of days). Your batteries will like this too!

under \$200 with shunt

Ask your R/E dealer or visit our web site for more info.

BOGART ENGINEERING

19020 Two Bar Road, Boulder Creek, CA 95006

(831) 338-0616

www.bogartengineering.com

The **TriMetric** TM-2020



Measures: battery volts, amps, % full (based on amp-hours), battery lifetime total amp-hours, highest battery voltage, lowest battery voltage, days since charged, and days since equalized.

Are Alternative Energy Prices Turning Your Budget UPSIDE DOWN?

At Solar On Sale our one and only goal is to put alternative energy products in the hands of the masses, where they belong, for the lowest prices possible!

Trace SW4024 \$2279.00
Heart 2 KW w/ Charge \$699.00
ProSine 2.5-12 \$1619.00
ProSine 3.0 \$2079.00
Trace SW4048 \$2259.00
Kyocera KC120 \$549.00
Trace PP-SW4024/S \$3369.00
Trace DR1512 \$699.00


Trace PP-SW4024/D \$5759.00
Trace DR2424 \$969.00
Solarex VLX-53 \$239.00
1000 watt Inverter \$199.00
Trace SW5548 \$2799.00
Danby Propane Fridge \$805.00
500 watt Inverter \$99.00
Heart 2.5 KW w/ Charge \$850.00

SOLAR ON SALE

Toll Free 1-888-64-SOLAR (76527)

<http://www.solaronsale.com>



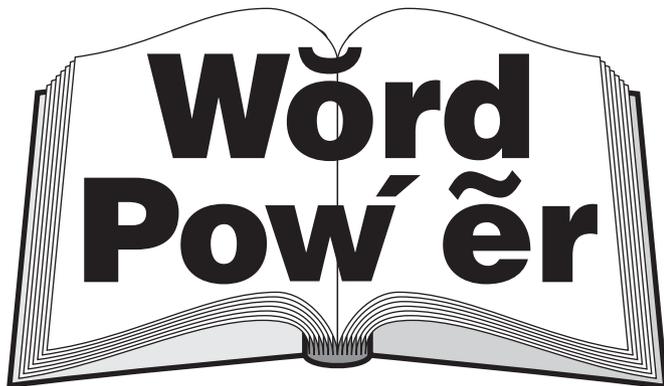

Renewable Energy Terms

Watt-hour—unit of energy

Ian Woofenden

©1999 Ian Woofenden

Once you know what a gallon is, you should have no trouble seeing that a “gallon per second” is a *rate* of liquid flow. The phrase itself helps us understand. With electricity, the terms tend to confuse us.

At first glance, the term “watt-hour” might sound like a rate. It has a time element, reminding us of “per hour.” And a watt, like a gallon, sounds like a quantity of “stuff.” But in fact, a watt is a rate, and a watt-hour is a quantity. We can compare a watt (technically a joule per second) to the rate water is filling your bucket (a certain number of gallons per second), and watt-hours to the number of gallons in your bucket.

This distinction between watt and watt-hour is crucial! They are not at all the same thing, though they are often mixed up. The terms themselves are confusing, and frequent misuse dulls the distinction for us.

What if you ask your spouse to bring home three gallons per second from the dairy section of the local grocery store? You will wish that you’d specified the time period you had in mind when you get more milk than you expected.

You’ll have a similar confusion if you ask your renewable energy (RE) dealer to design a system that will give you 14,000 watts. He or she will want to know if you need 14,000 watts continuously (an enormous system), or if you are really misusing the terms and mean 14,000 watt-hours per day (a merely huge system). You might also mean that you need 14,000 watts peak, to handle the brief surge when you start all your large power tools and your irrigation pump at once.

If you’re looking for the universal measure for an RE system—watt-hour is it. A watt-hour defines the amount of energy used when we leave a one watt load on for

one hour. Just multiply watts times hours and you’ll have watt-hours. Voltage is already factored in, so once you get to watt-hours, you’re using a measure that allows you to compare loads, generating sources, and batteries—regardless of system voltage. When you do your load analysis, convert everything to watt-hours and the process will be much easier.

Folks on the grid buy electrical energy by the kilowatt-hour, which is one thousand watt-hours. When people say that they paid for 50 kilowatts last month, it’s obvious that they don’t understand the terms. It’s like saying you’re going to buy three gallons per second at the dairy—it tells you only the rate, not the total amount.

A closely related terminology confusion is between “power” and “energy.” Electrical energy is measured in watt-hours. Electrical power is the rate of energy flow, and it’s measured in watts. In common speech, we use “power” and “energy” very loosely, and often not in their technically accurate sense. This doesn’t actually bother me too much, since most of our lives are not spent speaking technically. It also seems hopeless to expect the whole population to use these terms in their technical sense. Even the power—Oops! Do I mean energy?—companies can’t seem to keep them straight.

But when it comes to watts and watt-hours, we will only confuse others—and ourselves—by not using the terms correctly. A watt-hour is a measure of energy—it’s a quantity of “stuff.” A watt is the rate at which energy is generated or used.

Access


Author: Ian Woofenden, PO Box 1001, Anacortes, WA 98221 • Fax: 360-293-7034
ian.woofenden@homepower.com



Here's a brighter solution! Forever Titan Solar Light

With an 18 watt fluorescent bulb, it is the brightest solar light on the market.

Fully recharged by the sun and portable, Forever Titan Solar Light is perfect for home, emergencies, camping and recreational activities.

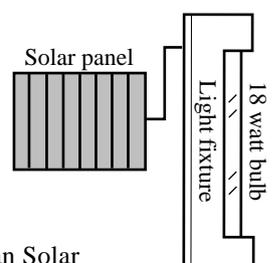

Limited time only! Forever Titan Solar Light (#15/4/10) for \$149. Call us now to order!

(Includes lighting fixture, solar panel, and cable. Sales tax and shipping extra.)

PO Box 591495, Dept. H
San Francisco, CA 94159-1495
415/831-6184 Fax: 415/831-6127
bellsolar@aol.com

Visa/MC/Discover



BECAUSE SAVING RESOURCES IS IMPORTANT TO YOU, WE OFFER THE MOST EFFICIENT WASHER AVAILABLE.

- The **Staber System 2000** is the only top loading tumble action washer made in the U.S., using just 135 watt-hours per load
- EnergyGuide rated at just 294 kWh per year--lowest in its class
- Saves up to 30 gallons of water every load
- Uses 50% less energy because of heating less hot water
- Does not void warranty by using alternative power
- Operates on sine-wave and modified sine-wave inverters
- Saves 75%-150% of detergent costs
- Patented tub design creates water pumping action to clean better
- Total front access for easy maintenance
- No transmission or agitator to replace
- Extracts more water for less drying time
- Welded stainless steel inner and outer tubs
- No lower water seal, eliminates future leaking problems
- Holds more laundry, up to 18+ lbs. due to more usable tub volume
- Awarded 'Best of What's New' by *Popular Science* and named as a 'Best Buy' in *Consumers Digest*

"A Revolutionary Way to Wash"



Shown with front panel removed.

For dealer and ordering information:
1-800-848-6200
Staber Industries
 4411 Marketing Place, Groveport, OH 43125
www.staber.com



**STABER
 SYSTEM 2000**
 Water Conservation System



Things that Work!



The Symbol for Energy Efficiency

Wind & Sun

Serving customers around the world for over 20 years

Partial list of manufacturers

Astropower - Unisolar - Kyocera - Solarjack & Sunrise submersible pumps - Thin-Lite - Concorde AGM batteries - Siemens panels - Two Seas Mounts - Solarex
 Deka Industrial batteries - Trace - Statpower - Pulse - Morningstar - BP Solar - Shurflo pumps - Exeltech - TriMetric - Zomeworks tracking mounts
 Fire Wind & Rain maximum power point trackers - Solar Converters Inc. - Helirotrope - Delta Lightning arrestors - Dankoff solar pumps - and many others.

Summer-Fall Sale

These prices good through September 30, 1999 - See our web sites for many more specials.

Siemens SP65 - 65 watts, 25 year warranty: \$309 each for box of 2 or more

Siemens SR90 - 90 watts, 25 year warranty: \$430 each

Kyocera KC120 - 120 watts, 20 year warranty: \$599 each

Unisolar US64 - 64 watt thin film triple junction: \$298 each

Trace SW4024 or SW4048 4kw sine wave inverter: \$2439

Trace DR3624 3600 watt modified sine wave inverter: \$1139

Trace DR2424 or DR2412 2400 watt modified sine wave inverter: \$995

Trace TS512SB Tiger series 500 watt with charger: \$395

Prices do not include shipping. We accept all major credit cards.

Get our set of 3 - Catalog, Solar Design Guide, and Solar Water Pumping Guide for only \$7.50 postpaid.

See our online catalog and complete guides to solar at www.windsun.com

www.solar-electric.com (online store)

Northern Arizona Wind & Sun, Inc.

Phoenix, AZ

888 881-6464 - Fax: 623 872-9215

2725 E Lakin Dr., Flagstaff, AZ 86004

800 383-0195 - Fax: 520 527-0729



Mike Brown

©1999 Mike Brown

“What’s involved in designing and building a motor adaptor?”

I was talking to a guy at a show about converting a car, and we were listing the parts he needed to buy. When we got to the motor-to-transmission adaptor, he said, “I won’t need an adaptor, I have a friend with a machine shop who said he would help me build one. How hard can it be to build an adaptor?”

Before we answer the question, we need to define “adaptor.” An adaptor is a group of parts that replaces the internal combustion (IC) engine’s crankshaft, to which the flywheel was originally bolted. The adaptor provides a way to attach the electric motor to the transmission. It maintains the alignment between the motor driveshaft and the transmission mainshaft, as well as the flywheel location.

The parts of an adaptor include the transmission profile plate, motor ring, hub, and bushing. The transmission plate bolts to the transmission bellhousing on one side, and to the motor ring on the other side. The ring, in turn, bolts to the motor. These two pieces physically join the electric motor to the transmission.

Both the plate and ring have large holes in their centers. Inside of this open space, the hub and bushing fit together and join the clutch flywheel to the motor shaft. This is what actually transmits the power to turn the car’s wheels. Now let’s look at the individual parts of an adaptor and see how they work together to do the job.

Transmission Profile Plate

I like to say that the transmission profile plate fools the car’s transmission into thinking it is connected to an IC engine instead of an electric motor. But this is only part of its job. The outer perimeter of the plate is cut to follow the shape of the transmission bellhousing as much as necessary, and provides holes that match the mounting holes in the transmission. But its most important job is to accurately locate the motor so the motor shaft is in perfect alignment with the transmission mainshaft.

In the mating surface of the transmission bellhousing (the surface that rests against the rear of the engine block), there are two holes that are larger than the rest of the mounting holes. These holes match two similar holes in the engine block. Inserted in these holes are two hollow tube sleeves called “locating dowels.” These dowels

accurately lock the transmission to the engine with the centerlines of the transmission mainshaft and engine crankshaft in perfect alignment.

To duplicate these dowel locations on the profile plate, we first have to determine the mainshaft center. Since a majority of transmission mainshafts are supported at the clutch end by the pilot bearing in an IC engine car, there is both up-and-down and side-to-side play at that end of the mainshaft.


To eliminate this play and precisely lock the mainshaft, I use a specially designed and built fixture to hold the mainshaft at the exact center point, determined with a dial indicator. Over the years, I have built up quite a collection of special tools I had to design just to take the measurements from various vehicles. I am still adding to this collection as I work on new transmissions with different problems to solve. For example, some transmissions have a mainshaft that is recessed in the bellhousing. In order to get true center measurements, I have to build a precise extension to bring the mainshaft location out to the edge of the bellhousing.

Once the mainshaft center is locked in place, I measure the distance between each of the dowels and the mainshaft, between the two dowels themselves, and between the mainshaft and a straight edge across the dowels. I then use trigonometry to check my measurements. All of these measurements are done to three decimal places of accuracy.

The measurements are then transferred to a stencil board pattern that outlines the shape of the bellhousing and locates the less critical holes for the bolts that hold the adaptor plate to the transmission.

The machinist who makes the adaptors for me uses this pattern to cut the aluminum profile plate to shape, and to locate the mainshaft center. When the plate is clamped to the vertical milling machine, he lines up the machine’s spindle with the mainshaft center mark, and moves the mill’s calibrated table to locate the dowel holes, using the

Motor Adaptor Assembly

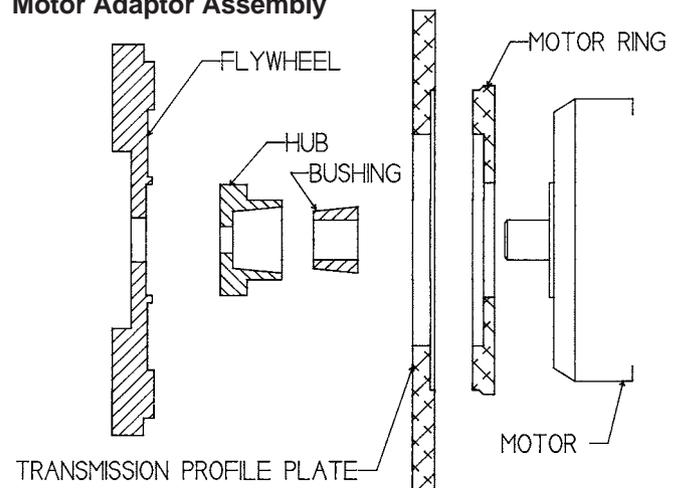

dimensions taken from my earlier measurements. Then the mounting holes for the bolts that hold the plate to the motor ring are drilled, and the hole for the hub is cut. All of these are located precisely in relation to the mainshaft center.

Driveshaft Hub

The next piece of the adaptor we will talk about is the steel hub. Along with the bushing, this is what locks the flywheel in position on the motor driveshaft. The face of the hub looks like the flywheel end of the IC engine's crankshaft, which it duplicates.

In order to design the hub, I have the customer send me the flywheel and one flywheel bolt from the car. I measure the flywheel and draw a full-scale sectioned side view of it on my computer, using a computer aided design (CAD) program. I then draw in the hub, which may have a projecting diameter to accurately locate the flywheel. (In some cases, the outside diameter of the hub itself is the locating surface.) The drawing includes the flywheel bolt hole circle, and any provisions for a mainshaft pilot bushing or bearing. Also shown are the number of flywheel bolts, their thread size and pitch, and the number of degrees between the holes in the bolt circle.

All of these items added together give us a duplicate of the original crankshaft end, which makes up half of the system that mounts the flywheel on the motor shaft. In addition to the flywheel bolt holes in the hub, there are four to six holes, drilled and counterbored for small socket head cap screws. They are arranged in a circular pattern similar to the flywheel bolt circle. These holes match up to holes on the bushing, as we will see later.

On the opposite side of the hub, away from the flywheel, a large tapered hole is bored. The depth of the hole and the degree of taper matches the length, degree of taper, and end diameters of the bushing, which locks the flywheel and hub to the motor shaft.

Bushing

The tapered bushing is a short piece of steel with ends of different diameters. A hole the size of the motor driveshaft runs through it from one end to the other. A suitable keyway slot is cut the length of the shaft hole for a piece of square steel key stock which will fit a matching slot on the driveshaft.

On the side of the bushing opposite the keyway, a narrow slit is cut through the bushing along its entire length. Starting on the small diameter end, from four to six small holes are drilled through the length of the bushing, and then tapped to give them threads for most of their length. The spacing and diameter of these holes matches that of the holes drilled and counterbored in the hub earlier.

To install it, the bushing is slipped over the motor shaft and key, then the hub is placed over the bushing. The small socket head screws are inserted through the holes in the

hub and threaded into the tapped holes in the bushing. As the bushing is pulled into the hub, the taper tightens and causes the slit to close, locking the bushing to the shaft. At the same time, the tapered surfaces of the hub and bushing are being locked together by the tension.

After the screws are tightened a little more than hand tight, the hub/bushing assembly can be removed only with a heavy-duty puller, or by hammering on the loosened set screws to break the taper lock.

Fill In the Blanks

With the flywheel and the hub/bushing assembly drawn on the computer screen, I next draw in the side view of the profile plate. The surface of the profile plate which contacts the mating surface of the transmission is parallel to the furthest surface of the flywheel. I call the distance between these two surfaces the "magic distance." This number is obtained by measuring from the same surface of the flywheel to the mating surface of the engine block before the flywheel is removed from the IC engine.

Once the transmission side of the profile plate is drawn in and placed at the magic distance, the motor side of the plate is drawn in parallel to it at the proper thickness of the plate. The motor is drawn in next, located by a predetermined point in the bushing and by the end of the motor shaft. Depending on the length of the hub and the thickness of the profile plate, there is a gap between the plate and the motor of approximately 5/8 to 2 3/4 inches (16–70 mm). This gap is filled by the motor ring.

Motor Ring

The motor ring allows us to use a thin, light, and easy-to-make profile plate. For adequate rigidity, the plate should be at least 5/8 inch (16 mm) thick. The resulting gap to the motor is filled with this thick ring. The ring is much smaller across than the plate, so a thick ring is lighter and cheaper than a thick plate would be. Also, it's round, which is much easier and cheaper to machine in thick material than the irregular shape of the plate would be.

The motor ring has a locating projection or recessed diameter that matches a recess or projection on the motor, and a locating projection that matches a recess on the profile plate. There are four through-holes counterbored to suit the cap screws which hold the ring to the motor, and four threaded holes for the bolts that hold the profile plate to the ring.

Put It All Together

So let's see how this all works. The locating projection of the motor is concentric with the centerline of the motor shaft. It fits into the recessed diameter of the motor ring, which is concentric with the locating projection on the other end of the motor ring. This projection fits into the locating recess of the profile plate, which is concentric to the center point of the mainshaft. This is the same center point that was used to locate the dowels. They, in turn, secure the motor/adaptor assembly on the transmission with the

motor driveshaft and the transmission mainshaft on the same centerline within 0.001 inch (0.025 mm).

This is a brief overview of what's involved in designing a motor adaptor for an EV. I did not talk about the machinery involved, or the skill necessary to operate the machinery to get the precision needed.

The success or failure of a home built adaptor is dependent on the skill of both the designer and the machinist building it, and how much time they are willing to put into doing it. Now that I have designed dozens of them, and have the tooling and CAD program, it takes me about twelve hours to take all the measurements, do the drawings, and check the math. It takes the machinist another twelve or more hours to build the parts.

I would like to dedicate this article to the memory of John Wasylyna. He built adaptors for most of the early EVs in the San Francisco Bay area (which was one of the early hotbeds of hobbyist conversions), using the taperlock system he developed. He taught me most of what I know about adaptor design.

Access

Mike Brown, Electro Automotive, PO Box 1113-HP, Felton, CA 95018-1113 • 831-429-1989 • Fax: 831-429-1907
mike.brown@homepower.com • www.electroauto.com



**RAISING TOWERS?
GET A GRIP!**
As seen in the article by Paul Gipe in
December 98/January 99 issue

Griphoist-Tirfor® - safe and reliable hoist.
Works in any position:
horizontal, vertical, or angled
Capacity 2,000 lbs. - 8,000 lbs.

- Lifts
- Lowers
- Pulls
- Tensions

Super Pull-All® a remarkable
small-sized lightweight hoist.
Capacity 1,500 lbs.

Tractel Inc.
GRIPHOIST® Division
CALL: (800) 421-0246
or (626) 937-6727 West Coast Branch
or FAX: (781) 828-3642
110 Shawmut Road, PO Box 188, Canton, MA 02021
e-mail: griphoist@worldnet.att.net




**For a State That Pioneered
Fashion-Forward Headwear:
Renewable Energy
Was a No-Brainer.**



Wisconsinites have a tradition of thinking outside the box. We've combined a great natural lifestyle with a solid industrial base. We see renewable energy as the path to an even more prosperous future.

Our entire state, from Governor Tommy G. Thompson on down, is committed to maximizing the use of renewable energy...photovoltaic/solar, water, wind, biomass and geothermal. Even the Green Bay Packers. Lambeau Field led the NFL in becoming an ENERGY STAR® stadium, equipped with photovoltaics.

If you work in renewable energy, we want you in Wisconsin. We have grants to get you started, an energetic commitment to renewable technologies, and a pledge to be business-friendly.

Call (800) 762-7077 for more information on renewable energy opportunities in Wisconsin.

**Forward Wisconsin is Our
State Motto. It's Also How
We Think About Energy.**



**Complete
Y2K Systems**

**SOLAR ELECTRIC
WIND ELECTRIC
PROPANE GENERATORS
(8KW available late May, limited supply)
INVERTERS
SOLAR EVAPORATIVE
COOLERS *SPECIAL SALE!***

A Premier Manufacturer of Quality Solar Products
SUNAMP POWER COMPANY
7850 E. Evans Rd., S-104
Scottsdale, AZ 85260-6919
1-800-677-6527




New **BULLDOG**
Generator Sets

Diesel, Propane & Natural Gas
Local Service Support
No Waiting Six Months for Parts

**Dealers
Wanted!**




5KW, 1800 RPM Diesel: \$4,587

BOWERS POWER SYSTEMS

Seattle, Portland & San Francisco
Ph 800-858-5881 • Fax 888-246-2935
www.bowerspower.com

SIEMENS

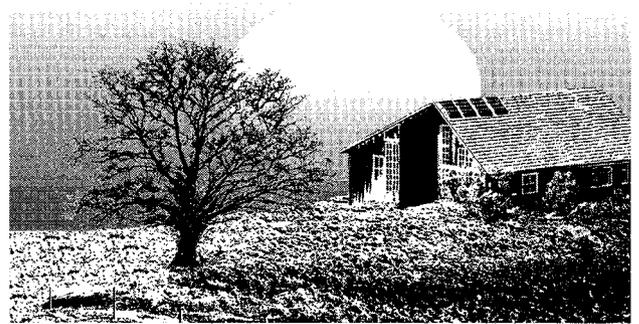

Solar Power Your Dream.

You've finally found just the right spot. A little out of the way, but good water, good soil, and even a little view. You're going to build.

Find out now just how easy it is to have a solar system to meet all or part of your electrical needs.

See Your Siemens SolarPowerPro™

Siemens can help turn your plans into reality. An economical Siemens solar system can give you year after year of trouble-free electricity. And do it silently, without fuel, waste or pollution.

Office (520) 636-1001

Fax (520) 636-1664

P.O. Box 365, 2655 N. Hwy 89
Chino Valley AZ 86323



HITNEY SOLAR PRODUCTS, INC.
Harmony with Nature

Considering an Alternative Energy System for your home or business?

Plan ahead & Save up to 70% on your total power system!

Lower your energy usage now with

SUPER ENERGY EFFICIENT LIGHTING & APPLIANCES

from: **Creative Energy Technologies**



Refrigerators • Washers • Dryers • Dishwashers
Lighting (LED, AC, DC) • Tankless Water Heaters
Composting Toilets • Solar Water Heaters
Water Purification & Pumping Supplies

CET can help you power your home or business with:

Complete Solar Electric Systems • Components
Wind Generators • ALL of your alternative energy needs!

Take advantage of our incredibly Low Prices without sacrificing expert customer service.

For more information, including free system-sizing worksheets, "How-To" diagrams and detailed product descriptions, check out our online store at: www.cetsolar.com

Or call us toll-free at 888-305-0278



10 Gertys Path/off Yankee St.,
PO Box 304, Summit, NY 12175




SNORKEL STOVE

b/w on negatives

3.5 wide

4.5 high

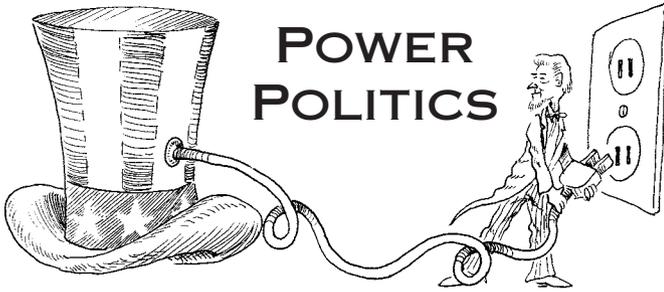

U.S. Energy Policy Up for Grabs

Michael Welch

©1999 Michael Welch

There is so much going on nationally with RE that it makes my head swim. One very important project is an annual opinion poll on how U.S. citizens want tax dollars to be spent on energy programs.

I have reported on these surveys in years past. Once again it is quite evident what a majority of the public wants the U.S. government to do with energy policy. Unfortunately, our elected and appointed representatives continue to ignore our opinions.

America Speaks Out

America Speaks Out on Energy: Funding Priorities, Electric Utility Restructuring, and Tax Incentives was conducted for the Sustainable Energy Coalition by Research/Strategy/Management, Inc. Between May 10th and 18th, 1999, 1,029 adult Americans were surveyed. The survey margin of error was ± 3.0 percent.

There is a malaise among the general public toward RE issues in the U.S., and renewed publicity efforts by the nuclear power industry. In spite of this, the findings reflect even higher levels of support for sustainable energy programs than were measured in the Coalition's earlier annual polls. The support cuts across all political, gender, age, geographic, and income categories.

Normally I am hesitant to load up my columns with statistics, but how else am I going to give the full sense of something like a survey? Stats can be inaccurate or even manipulated toward a predisposed conclusion if methods are flawed or end results are taken out of context. But the Sustainable Energy Coalition uses a polling firm that often works with right-leaning, Republican causes. That should eliminate any claims of liberal bias.

Renewable Energy R&D

62 percent of Americans would give the highest priority to funding the U.S. Department of Energy's (DOE) renewable energy and energy efficiency research and development (R&D) programs. 31 percent of respondents selected nuclear power as the first R&D program that should be subject to budget cuts, followed by fossil fuels (21%). Only 5 percent would cut funding for energy efficiency R&D, while just 9 percent would reduce the renewable energy budget.

Ironically, recent votes by the House Science Committee and Senate Appropriations Committee would allocate federal energy dollars in a manner completely at odds with the public's preferences. According to the American Solar Energy Society, the House Science Committee has considered and passed out of committee two bills, HR 1655 and HR 1656, which propose funding ceilings for DOE civilian R&D and commercial applications programs respectively.

The ceilings will apply to the 2000 and 2001 budgets (all years refer to fiscal year budgets). In most cases, the DOE's energy efficiency and renewable energy programs would be capped at or below 1999 levels. Under the proposed legislation, however, funding for nuclear and fossil fuel research would not be restricted to 1999 levels.

Representative Mark Udall is offering an amendment to each bill to increase the funding ceilings for energy efficiency and renewable energy. The Udall amendment to HR 1655 will increase the ceiling by US\$160.1 million for 2000 and US\$225.6 million for 2001, increases of 15 percent and 20 percent respectively. The Udall amendment to HR 1656 (affecting a much smaller group of programs) will increase the ceiling by US\$10.6 million for 2000 and US\$10.1 million for 2001, increases of 40 percent and 37 percent respectively.

What can we do to get the government to do the right thing? Contact your representatives and tell them of the predicament now being faced by federal renewable energy and energy efficiency programs. Encourage them to support efforts of the Renewable Energy Caucuses (both the House and Senate) to ensure that adequate funding for sustainable energy technologies is provided in the 2000 and 2001 budgets.

Deregulation

78 percent of respondents support a requirement that utilities generate 10 percent of their electricity from solar, wind, geothermal, and biomass, as part of federal electric utility restructuring legislation. 59 percent favor a 2 to 3 percent surcharge on utility bills to support energy efficiency, low-income energy assistance, and renewable energy R&D programs. 89 percent of Americans feel that electricity providers should be required to tell their customers the type of fuel being used to generate electricity as well as the type and amounts of air pollutants being emitted.

A lopsided majority (76%) was clear about who should pay for nuclear power. They believe that utility shareholders, not utility customers, should bear the uneconomic costs of these plants under deregulation. Neither the White House nor anyone in Congress has introduced a utility restructuring proposal that reflects the public's preferences.

What can we do about this? Write the White House, and learn more about the Critical Mass R.A.G.E. (Ratepayers for Affordable Green Electricity) program. See *HP67*, page 88 for more information.

Tax Incentives for Energy

80 percent favor tax incentives to increase the use of renewable energy for the production of electricity either strongly (45%) or at least somewhat (36%). The survey polled citizens about incentives for the purchase of automobiles that are at least twice as energy efficient as the average new car. 77 percent support incentives either strongly (46%) or at least somewhat (31%).

83 percent support tax incentives for the purchase of new homes that are at least 30 percent more energy efficient than the average new home. Finally, 84 percent of those surveyed believe tax incentives should be made available to encourage the purchase of home heating and cooling systems that are at least 30 percent more efficient.

Update on Mobile Chernobyl

Soon after deadline for my column in *HP71*, Public Citizen published a report, *The Nuclear Industry: A Cash Cow for Congress*. It adeptly explains why nuclear power is still a factor in U.S. energy policy. It's really no mystery; the nuclear industry gives a lot of money to politicians to further its cause. Forty-nine Congressmembers received campaign contributions from the nuclear industry in 1998. Of these, only eight voted against the Mobile Chernobyl bill. See the table for the dirty details.

And as the 1999 Mobile Chernobyl bill comes up for a vote, the contributions keep rolling in. Public Citizen analyzed the political action committee (PAC) contributions from corporations, labor groups, and other organizations who are members of the Nuclear Energy Institute (NEI), the lobbying arm of the nuclear industry. Here are a few excerpts from the Public Citizen report:

"...these groups gave almost US\$15.5 million dollars to current members of Congress in the 1998 election cycle."

"The leading recipients of contributions from the nuclear industry are those representatives who supported HR 1270, a similar bill in the last Congress. Meanwhile, the political parties have accepted US\$3.7 million in soft money from NEI and its membership since 1997."

"Not surprisingly, there is a direct correlation between members of the House who voted with the nuclear industry and the industry's campaign contributions."

Nuke Train

One of those NEI members is the nuclear reactor manufacturer General Electric, which also happens to own NBC. The network was planning to run a TV mini-series called *Atomic Train*, about a runaway Idaho-to-Denver train carrying a nuclear weapon and nuclear waste. When corporate bigwigs found out that their network was planning to run a program that might not show nuclear waste in a completely safe manner, things changed in a flash. All references to nuclear waste were changed to "hazardous waste."

In the original promos for the movie, star Rob Lowe said, "it

Largest NEI PAC Contributions to the 106th Congress (1998)

State	Congressmember	HR 1270*	Total
AK	Young, Don	Supported	\$52,000
AL	Riley, Bob	Supported	\$40,500
AL	Aderholt, Robert	Supported	\$39,000
AZ	Hayworth, J. D.	Supported	\$43,056
CA	Bilbray, Brian	Supported	\$63,954
CA	Lewis, Jerry	Opposed	\$56,000
CA	Hunter, Duncan	Supported	\$51,600
CA	Cunningham, Randy	Supported	\$50,500
CA	Rogan, James	Supported	\$48,749
CA	Packard, Ron	Supported	\$42,230
CA	Tauscher, Ellen	Opposed	\$41,750
CA	Sanchez, Loretta	Opposed	\$39,700
CT	Johnson, Nancy	Supported	\$44,609
GA	Norwood, Charlie	Supported	\$50,764
GA	Linder, John	Supported	\$41,250
IL	Hastert, J. Dennis	Supported	\$66,641
IL	Shimkus, John	Supported	\$46,106
LA	Tauzin, W. J.	Supported	\$60,000
MA	Moakley, John Joseph	Opposed	\$40,050
MD	Hoyer, Steny	Supported	\$43,000
MI	Dingell, John	Supported	\$111,632
MI	Bonior, David	Supported	\$49,500
MI	Knollenberg, Joe	Supported	\$46,644
MO	Gephardt, Richard	Opposed	\$73,232
NJ	Pallone (Jr.), Frank	Opposed	\$47,100
NM	Skeen, Joe	Supported	\$54,672
NY	Towns, Edolphus	Supported	\$41,950
OH	Sawyer, Thomas	Supported	\$51,450
OH	Brown, Sherrod	Supported	\$48,969
OH	Oxley, Michael	Supported	\$47,500
OH	Hobson, David	Supported	\$38,750
PA	Murtha, John	Supported	\$75,450
PA	Klink, Ron	Supported	\$70,841
PA	English, Phil	Opposed	\$44,621
SC	Spratt (Jr.), John	Supported	\$78,500
SC	Spence, Floyd	Supported	\$58,250
TN	Gordon, Bart	Supported	\$44,000
TX	Barton, Joe	Supported	\$117,744
TX	DeLay, Tom	Supported	\$73,500
TX	Hall, Ralph	Supported	\$68,123
TX	Frost, Martin	Supported	\$60,494
TX	Stenholm, Charles	Supported	\$57,463
TX	Armey, Richard	Supported	\$49,500
TX	Rodriguez, Ciro	Supported	\$40,690
VA	Bliiley, Tom	Supported	\$80,681
VA	Moran, James	Opposed	\$57,500
VA	Boucher, Rick	Supported	\$40,686
VA	Davis, Thomas	Supported	\$39,075
WA	Dicks, Norman	Supported	\$40,500

* 1998 Mobile Chernobyl Bill

Reprinted from a Public Citizen report, *The Nuclear Industry: A Cash Cow for Congress*.

could happen." In fact, the accident originally portrayed in *Atomic Train* couldn't happen. But the danger of nuclear waste transport that caused the movie to be made in the first place is genuine, and no amount of self-censorship by General Electric and the nuclear industry can change that fact.

What to do about this? Boycott any and every GE product, and don't even think about watching their programming or supporting their advertisers. Besides that, TV can rot your brain.

Access

Author: Michael Welch, c/o Redwood Alliance, PO Box 293 Arcata, CA 95518 • 707-822-7884
 michael.welch@homepower.com • www.igc.org/redwood

R.A.G.E. and Public Citizen's Critical Mass Energy Project, 215 Pennsylvania Ave. SE, Washington DC 20003
 202-546-4996 • Fax: 202-547-7392 • cmep@citizen.org
 www.citizen.org/CMEP/RAGE

Sustainable Energy Coalition, 315 Circle Ave. #2, Takoma Park, MD 20912 • 301-270-2258 • Fax: 301-891-2866
 kbosson@cais.com

American Solar Energy Society, 2400 Central Avenue, Suite G-1, Boulder, CO 80301 • 303-443-3130 • Fax: 303-443-3212
 ases@ases.org • www.ases.org

The White House, 1600 Pennsylvania Ave., Washington, DC 20500 • 202-456-2168



ETA ENGINEERING

MANUFACTURER OF RE SYSTEM PRODUCTS

44 AMP PV BATTERY CHARGE REGULATOR (PBR SERIES)



- 88 AMP SURGE RATING FOR 20 SECONDS
- TEMPERATURE COMPENSATED CHARGING
- PATENTED PARALLEL SWITCHING SHUNT
- PULSE WIDTH MODULATION
- 12 & 24 VOLT MODELS
- 5 YEAR WARRANTY

BATTERY CAPACITY METER



- LED SCALE DISPLAYS BATTERY BANK VOLTAGE & CAPACITY IN 10% INCREMENTS
- LEDs FOR FLOAT, EQUALIZE, & LOW VOLTAGE
- SOLID-STATE ELECTRONICS
- 12, 24, 36, & 48 VOLT MODELS
- 60 INCH #22 AWG CABLE INCLUDED

CONTACT YOUR DEALER FOR AVAILABILITY

ETA Engineering, Inc.
 8502 E. Cactus Wren Rd.,
 Scottsdale, AZ 85250
 Toll Free: (877) 964-4188
 Fax: (602) 948-0912
 www.ETAengineering.com
 ETAEng@aol.com

AUTHORIZED DISTRIBUTOR OF:

 INVERTERS / CHARGERS

ELECTRIC VEHICLE

COMPONENTS, CONVERSION KITS, PUBLICATIONS, VIDEOS, AND ENGINEERING DESIGN SERVICES FOR THE EV HOBBYIST AND MANUFACTURER...All components selected with safety and reliability foremost in mind...We stock and sell the largest variety of the very best:

- ◆ ADVANCED DC Motors in 9 variations from 2 HP to 28.5 HP
- ◆ CURTIS-PMC Controllers, Throttle Potboxes, Footpedals
- ◆ ALBRIGHT ENG. Main & Reverse Contactors in 6 models
- ◆ GENERAL ELECTRIC & HEINEMANN Circuit Breakers
- ◆ BUSSMAN Safety Fuses from 200 to 800 amps
- ◆ DC-DC Converters from 48 to 200 V input
- ◆ K & W ENG. & BYCAN Battery Chargers from 48 to 144 V
- ◆ Full line of CURTIS, WESTBERG, & KTA Meters & Gauges
- ◆ DELTEC Meter Shunts from 50 to 1000 A
- ◆ EVCC Adapter Plates, Couplings, Clamps, & Brackets
- ◆ PRESTOFLEX Welding Cable, MAGNA Lugs, Assy. Tools
- ◆ CONVERSION KITS for vehicles from 300 to 5000 lbs.
- ◆ Complete ELECTRATHON Drive & Instrumentation Pkg.
- ◆ 4 Complete GO KART kits...for up to 90 mph..

KTA SERVICES INC.

COMPONENTS & PUBLICATIONS CATALOG.....\$5.00
 Electric Vehicle components and systems since 1984

944 West 21st Street – Upland, CA 91784 USA
 Tel: (909) 949-7914 – FAX: (909) 949-7916
 Web: www.kta-ev.com

Power when the sun goes down...

WINDSEEKER

12 years of proven technology

Rated 500 Watts
 Only 22 lbs. (10 kg)
 Rotor Dia. 60" (1.5 m)
 2 Year Warranty
 Internally Regulated
 High Wind Applications



Southwest Windpower
 2131 N. First Street
 Flagstaff, AZ 86004
 Ph (520) 779-9463 Ext 11
 Fax (520) 779-1485
 dept11@windenergy.com
 www.windenergy.com

Contact us
for volume discounts


SunLine Solar

Starting at **\$29.95**

Phone 1-800-886-4762 • Fax 717-351-0383

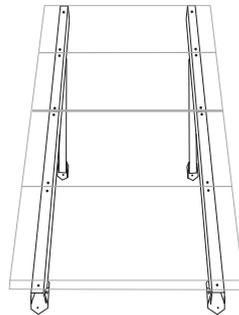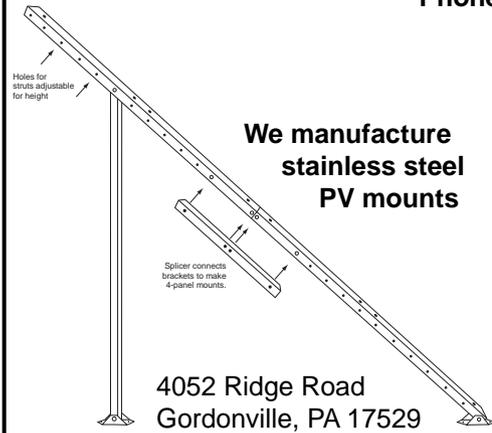

Visit our web site:
www.sunlinesolar.com

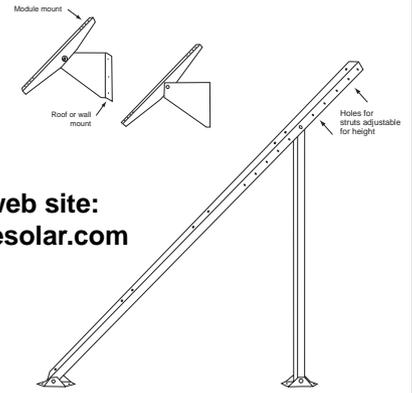

Have a South Window?



THE GREENSHELF™
A Solar Gardening Shelf!

Put that sunshine to work for you growing food and starting seedlings with **THE GREENSHELF™**.

Indispensable year round for herbs, salad greens, succession plantings, house plants and lots more!
Works great in a greenhouse, too.

Call **1-800-400-2684**
for free brochure or see online at
www.greenshelf.com

5408 County Road 250 • Durango, CO 81301

SolarRoofs.com

Complete Solar Water Heaters starting at \$895!

FIREBALL 2001

Y2K Compliant
PV Options
Patented Design
Dealer Inquiries Welcome




Check out these Exciting, Very Easy to Install, & Affordable Systems!

We are Web based: www.solarroofs.com
SolarRoofs.com, Carmichael, CA • (916) 481-7200

LOWEST PRICES UNDER THE SUN!

5555 Santa Fe St. #J
San Diego, CA 92109 USA
(619) 581-0051
(619) 581-6440 fax
TOLL FREE 1-800-842-5678
e-mail: solar@cts.com
<http://www.solarelectricinc.com>



SOLAR ELECTRIC INC.



UNI-SOLAR™

PowerStar

and many other fine products...best selection!
SATISFACTION GUARANTEED!

Trojan L-16

Special Prices for a Limited Time
Delivered Anywhere



Jesus said, "I am the way, the truth and the life..." John 14:6

Trojan

Maple State Battery
(802) 467-3662

HUP



Surrrette 2v, 1000 ahr KS-21 lead acid battery specially built by Surrrette Battery Co., this heavy-duty cell incorporates a positive plate .25 in. thick. The extra tall (25.5") case allows 5" of electrolyte above the

plates. Designed for maximum cycles and infrequent watering. Expected to last 15+ years of service, this battery has a 10 year warranty (3 years unconditional, 7 years pro-rated), and is among the toughest, longest lasting lead acid you'll find anywhere.

(freight extra)

12 vdc, 1000 ahr string (6 cells) ... \$1,259
24 vdc, 1000 ahr string (12 cells) ... \$2,496



Vermont Solar Engineering

PO Box 697, Burlington, Vt. 05402

phone: 802.863.1202 • toll-free: 800.286.1252
fax: 802.863.7908 • web: www.vtsolar.com

Professional salesfolk may talk a good game from behind the order desk, but very few are actually out there doin' it. We pride ourselves on being a hands-on dealer/installer, selling what we know to work well from down-to-earth experience. And we won't disappear after the sale, either. So if you'd like to separate the reality from the romance, give us a call. Thanks.

Meet the new Model 2020 Bogart TriMetric meter - only \$169 including shunt and shipping!!!

The 2020 offers several improvements over the original TriMetric, including display of battery state-of charge in both % full and actual amp-hrs. Reminders inform when equalization is necessary. A running tally is kept of battery status, including days since fully charged & equalized, discharge amp-hrs, and max/min voltage. The display is 30% larger than the original.





Who Controls the Power Highway?

Don Lowebug

©1999 Don Lowebug

For years, utilities have used interconnection rules and requirements as a means to limit independent generation. By making it difficult and expensive to gain access to the electric distribution system, utilities have tried to keep independent generation at a disadvantage.

Prior to the 1970s, utilities exercised a near monopoly on all generation. Only under the pressure of an oil embargo did the federal government enact legislation mandating that monopoly utilities allow independent generators access to the transmission and distribution system. However, independent generators were not free to market their power competitively. They were forced to sell it to the host utility at "avoided cost," a price significantly below retail.

Cogeneration

In spite of the handicaps imposed by burdensome interconnection requirements and low prices, independent generation has made significant inroads during the last twenty years, primarily in cogeneration. Cogeneration is electric generation that makes use of waste heat and is located at the point of use.

Since the electricity is generated on the customer's side of the meter, it has retail value. By utilizing all the energy, including the heat associated with the generation of electricity, cogeneration can compete with utility generation. Cogeneration was the first wave of the distributed generation revolution.

Tax Credits & Incentives

The oil embargo of the mid '70s was responsible for an upsurge in the use of renewable energy sources. Federal tax credits spurred solar water heating for homes and businesses. Business tax incentives created opportunities for wind farms and other large-scale renewable energy projects. These enterprises did not fare as well as cogeneration because energy prices did not escalate as expected. Further, the renewable energy farms were required to sell to the utilities.

Renewable energy's "failure" was due to market and regulatory forces, not technical issues. This was true for solar thermal too, though many tried to paint the problem as a technical quality issue. In fact, low energy prices and the end of tax incentives undermined sales, leading to the collapse of the support infrastructure. Without a support infrastructure to provide routine maintenance, the solar thermal industry "failed." Imagine if all the auto mechanics disappeared. Would we speak of the "failure" of the personal transportation industry?

Distributed Generation

Distributed generation (DG) might be loosely defined as small generation sources located at or near the point of load. The single most important aspect of DG is that it allows for self-generation. The generating party receives retail value for the power that is used on site, a far better economic return than avoided cost.

Readers of this magazine are mostly interested in renewable DG, and that's my focus here. Cogeneration is economically viable because of the added value of the heat produced during generation. In the same way, DG using photovoltaic or other renewables can be economically viable. This is due to the "distribution benefits" available because the generation is at the point of load. These benefits accrue to both the customer and the utility managing the distribution system.

For the customer, benefits include increased power reliability and quality. For the utility, benefits include peak load shaving (PV delivers power at midday, a time of peak demand, thus reducing the load on the wires and power plants) and deferral of distribution system upgrades.

Earlier I referred to the DG revolution. This paradigm shift is in large part responsible for the utility restructuring now taking place. Advances in DG technology (renewable and non-renewable) are driving this process. With increasing development of DG technologies, two related issues are coming to the fore: interconnection standards for DG sources, and regulatory questions regarding anti-competitive issues when investor-owned utilities own DG.

Interconnection Standards

Of particular interest to PV users and the PV industry are standards affecting the interconnection of inverters to utility wires, especially for inverters under 10 KW. These inverters function in systems operating under net metering tariffs in more than half the states in the USA. It is predicted that within a few years almost all the states will have this legislation enacted.

An interconnection standard (P929) is undergoing final approval by the Institute of Electrical and Electronic Engineers (IEEE). IEEE P929 represents the collaborative effort of inverter manufacturers, PV advocates, utility protection engineers, and staff at Sandia and NREL. Reference to IEEE, UL, and *NEC* standards is being included in the language of state net metering legislation. This will simplify the interconnection process for the users of small, grid-connected PV systems and the utility distribution companies that serve them.

The purpose of IEEE P929 is to create simplified and safe interconnection requirements that can be used as a national standard. Utility protection engineers and inverter manufacturers came to considerable agreement, resulting in the development of a "non-islanding" test and designation for inverters. Islanding is a condition in which an inverter continues to charge up a dead utility line. It is a major safety concern of utilities.

Underwriters Laboratories (UL) has included the non-islanding test as part of its updated listing (UL 1741) for inverters. Inverters that are non-islanding can be connected according to existing *NEC* requirements without extra disconnects required by some utilities. Trace Engineering recently issued a technical memo stating that its grid-connected inverters are non-islanding and would comply with the new UL 1741.

Implementation of this provision will reduce the cost of connecting PV systems to the grid and increase voluntary utility notification of grid-connected systems by the owners. It remains to be seen how individual utilities will implement these changes. Since many citizens regard the utilities as an extension of the evil empire, it is hoped that the utilities will see the opportunity here for some positive public relations.

Net metered residential PV systems are just one example of renewable DG. Larger installations must negotiate a morass of utility interconnection regulations. Since utilities gain income based on the volume of power sold to a customer, obstructionist interconnection requirements could be used to protect revenue.

The Fox Guards the Henhouse

There is another twist to this scenario. Though restructuring is splitting utilities into regulated distribution companies and unregulated generation companies, utility distribution companies (UDC, the regulated half) still plan to participate in DG. They argue that DG falls within the utility franchise because this generation is for the purpose of creating distribution benefits.

Utilities have in fact coined the term "grid support" for this kind of generation, a practice which serves to cloud the distinction between generation and distribution. Others—and this includes me—perceive that generation is generation, rightfully a competitive activity whether or not it has distribution benefits.

If the UDCs are permitted to engage in DG, they have unfair advantage in two ways. First, they write the rules pertaining to grid access and they can structure the interconnection

requirements to unfairly favor themselves. Second, UDCs control access to information about the distribution system and can maintain an unfair competitive advantage for themselves by limiting information.

Define the Terms

One simple solution is to apply a strict definition of generation. Restructuring unbundles generation from transmission and distribution (T&D). Since T&D remains regulated, regulatory commissions could prohibit utilities from engaging in DG.

Another approach would be to extend restructuring, and unbundle distribution from the utility franchise. If this move were taken, distribution would also become a competitive, unregulated activity. Distribution and generation would be completely unbundled.

Don't Believe the Names

Interconnection and distributed generation issues are currently the subject of hearings at California's Public Utility Commission and are becoming major issues as utility restructuring proceeds nationwide. I advise caution about a number of groups already in the fray. They have names suggesting a pro DG position, though they are in fact fronts for utility efforts to control DG.

Environmental groups such as the National Resources Defense Council (NRDC) are also taking a very compromising position with respect to utilities and DG. And utilities calling for "customer choice" and "competition" ring with sardonic irony when compared to their dominant market position and past history.

Kyocera Buys Golden Genesis

This merger—the latest in a wave of mergers—is expected to be complete by late July. This event is consistent with the vertical integration now occurring in the PV industry and follows several others discussed in previous columns. IPP questions whether this level of vertical integration is healthy for the industry.

One noteworthy difference here is that Kyocera is a non-traditional player in the energy business. Other recent RE mergers have involved oil companies and utilities, firms already in the business of delivering energy to end users.

Access

Don Loweburg, IPP, PO Box 231, North Fork, CA 93643
559-877-7080 • don.loweburg@homepower.com
www.homepower.com/ipp



**Wood Fired
Water Heaters**

**For Homes, Cabins, Camps, Remotes,
Solar Booster, Hot Tubs, Pools, Greenhouses!
USA Made • 3 Models • 10 Yr. Warranty**

Hot Products, Inc. • Dept. HMP • 300 Broadway • Eureka, CA 95501
Tel: (707) 444-1311 • Fax (707) 444-1380 • www.hotpro.com



SOLAR WEBB, INC.

"Fueling Your Future"

Southern California

SOLAR WEBB, Inc.



Beat the Heat with our Attic Vent Fan Kits,
Using solar power to keep your house *Happy!*
Stand-alone or Back-up solar power systems.

Order Line: 888-786-9322

Your Authorized Golden Genesis Dealer



Visit our website at: <http://www.solarwebb.com>



Vari-Fan

The most versatile
DC-powered ceiling fan
ever offered.

See more at our Web site:

www.fanworks.com

e-mail: info@fanworks.com

or write:

RCH Fan Works

2173 Rocky Creek Rd.

Colville, WA, USA 99114

Fax (509) 684-5199


Dealer Inquiries 1-800-529-6306

NEW ENGLAND SOLAR ELECTRIC, INC.

3 South Worthington Road, PO Box 435

Worthington, MA 01098

1-800-914-4131



This is the most popular book for PV remote homes. It is written and published by New England Solar Electric Inc.

"Best all around book on wiring your PV system."

Real Goods Sourcebook

"Our favorite book for Do-It-Yourselfers."

Windy Dankoff, Dankoff Solar Products

"This should become the bible for alternative energy users."

Ken Cox, Trace Inverters

\$16.95 plus \$3 PPS
(includes our \$3 catalog)

Send \$3 for our 80 page catalog and product guide

Servel/Dometic Gas Refrigerators. Trace Inverters. Trojan Batteries.
Siemens & Solarex PV modules, Osram Bulbs. Thinlite Fixtures
AquaStar Hot Water Heaters. AIR 403 Wind Generators

***Best book, most user friendly catalog,
& best kits in the business.***

ZOMEWORKS

b/w on negative

3.4 wide

4.5 high

The Solar Panel Sale of the Century!

Brand New - First Quality - At an unprecedented \$4.25 a Watt

Photowatt 75 Watts, Only \$318.00!
Photowatt 100 Watts, Only \$425.00!

This is a limited time introductory offer! First come, first served!

The name Photowatt is synonymous with unmatched quality!
 These are heavy duty industrial grade panels utilizing the latest 2mm polycrystalline technology.

SOLAR ON SALE




Toll free 1-888-64-SOLAR (76527)

<http://www.solaronsale.com>



The Dual Axis Tracking Advantage
**as compared to a fixed mount tilted at latitude*

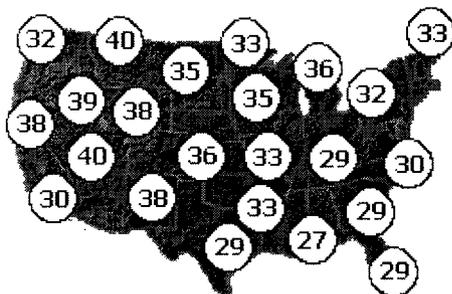

Percent Annual Power Increase

More Power...Less Money

ARRAY TECHNOLOGIES, INC. WWW.WATSUN.COM

3402 STANFORD NE, ALBUQUERQUE, NM 87107

TEL: (505) 881-7567 FAX: (505) 881-7572

You can turn water into juice using the **STREAM ENGINE**

- Operates at heads of 10 feet & up
- Adjustable for maximum power
- Multiple output voltages
- Output over 1KW
- Easy installation

Epoxy Encapsulated Alternator


Waterproof, Water Cooled,
 Neodymium Permanent
 Magnets, Brushless,
 Reconnectable Windings

Precision Cast Bronze

Turgo Wheel
 High Efficiency, High Capacity

Also Available:

Hydro components including
 turgo & pelton runners, system
 design, and tech support

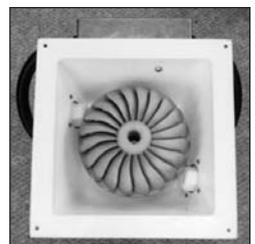

\$1695

"This is a very cool machine. It represents a major breakthrough in microhydro design." -Bob-O Schultze, Home Power #67

Energy Systems & Design

P.O. Box 4557, Sussex, NB, E4E 5L7, Canada

Tel: (506) 433-3151 • Fax: (506) 433-6151


website: www.microhydropower.com

email: hydropow@nbn.net.nb.ca



Things that Work!

To Ground or Not to Ground: That is *Not* the Question (in the USA)



John Wiles

Sponsored by the Photovoltaic Systems Assistance Center,
Sandia National Laboratories

“Even most 12 volt PV systems shall be grounded in some way,” sayeth ye *National Electrical Code (NEC)*. This Code Corner will begin with the code requirements for a PV system from the ground up.

Subsequent articles will discuss the code requirements for PV hardware on the roof and for the components in between. The terminology, the whys, and the hows of grounding PV systems will be addressed. Proper grounding will enhance safety (both user and equipment), improve performance, and may even reduce costs. Article 250 (Grounding) was completely revised in the 1999 edition of the *NEC* and references to Article 250 will refer to the new edition.

Why?

Research and experience have indicated that both grounded and ungrounded electrical systems can be safe. Europeans have a 100 year tradition of operating ungrounded electrical power systems, and European codes reflect this. The European Community also makes use of double-insulated components and electronic ground-fault detectors in many applications.

Reports in the U.S. have indicated that on ungrounded DC electrical systems (non-PV) used by electrical utilities, when a ground fault occurs that is undiscovered or unrepaired, a second ground fault will frequently occur for the same reason within two weeks. Double ground faults create problems because overcurrent devices may not sense them and may not offer protection. The utilities always rely on extensive electronic ground-fault detectors in their ungrounded DC electrical systems.

In the United States, the arguments for and against grounding were carried out over several decades as the *NEC* was being developed, just before the turn of the century. Unlike the Europeans, the U.S. decided to require the use of grounded systems. For those who want to achieve a good understanding of the subject of grounding, the *NEC*

Handbook and the International Association of Electrical Inspectors (IAEI) *Soares Book on Grounding* are recommended (see Access). The IAEI book even gives some of the history of grounding requirements in the U.S.

Electrical systems in the U.S. (including PV systems) are generally solidly grounded to limit the voltage with reference to ground during normal operation, and to prevent excessive voltages due to surges from lightning or unintentional cross connections with higher voltage lines.

In PV systems, the modules are usually mounted in high, exposed locations where they are prone to picking up induced surges from nearby lightning strikes. Utility-interactive inverters are also subjected to surges on utility power lines. In addition, systems using PV power to run computers with hardwired modems are subject to surges from the telephone line. Proper grounding effectively reduces these potential problems and more.

Terminology

The term “grounded” indicates that one or more parts of the electrical system are connected to the earth, which is considered to have zero voltage or potential. The earth is used as a reference because there is so much of it, and many conductive surfaces are connected or in contact with it. Most metallic objects such as metal building frames, as well as other electrical/electronic systems (TV, telephones, etc.) are in contact with or connected to earth. In some areas, the term “earthing” is used instead of “grounding.”

Plumbing (including bathtubs and sinks) used to be solidly grounded. But now it may be not connected to ground because of the use of plastic pipes and drains. When faults occur in electrical systems, those faults are frequently faults to earth (ground faults). To better understand the grounding requirements of the *NEC*, it is necessary to examine several terms used in conjunction with grounding.

A *grounded conductor* is a conductor that normally carries current and is connected to the earth. Examples are the neutral conductor in AC wiring and the negative conductor in many DC systems. Note that some DC systems such as telephone systems connect the positive conductor to ground rather than the negative conductor. A system is a “grounded system” when one of the current-carrying conductors is grounded.

An *equipment-grounding conductor* is a conductor that does not normally carry current (except under fault conditions) and is also connected to earth. It is used to connect the exposed metal surfaces of electrical equipment together and then to ground. Examples are the bare conductor in non-metallic sheathed cable (Romex®) and the green, insulated conductor in power cords for portable equipment. These equipment-grounding conductors help to prevent electrical shocks and allow overcurrent devices to operate properly when ground faults occur.

A *grounding electrode conductor* is the conductor between a common single grounding point in the system and the grounding electrode. Splices are not normally made in this conductor. The *common single grounding point* is a point where the grounded conductor and the equipment-grounding

conductors are connected to the grounding electrode conductor.

A *grounding electrode* is the metallic device that is used to make actual contact with the earth. There are “made” grounding electrodes, such as the common 5/8 inch diameter, 8 foot long (16 mm x 2.4 m) ground rod. Other types of grounding electrodes include metal water pipes, metal building frames, and concrete-encased cables (known as Ufers, after their inventor). Specific requirements for each of these grounding electrodes can be found in Article 250 of the *NEC*. Local codes and practices vary greatly and should be investigated to determine which types of electrodes are in common use.

Bond is a term that, as a verb, means to connect two or more points together. As a noun, it usually refers to the connection between the grounded conductor, the equipment-grounding conductors, and the grounding electrode conductor. Bonding is also used to describe connecting all of the exposed metal surfaces together to complete the equipment-grounding conductors.

A *grounding electrode system* is a system where two or more grounding electrodes are connected together. These systems are common in PV installations where there are two grounds (such as an existing one for the AC system and a new grounding electrode that has been installed for the DC system). See *NEC* Sections 250-81 through 250-86.

Figure 1 shows how the grounding components are related in a PV system.

There is Grounding and There is Grounding

NEC Requirements


The *NEC* establishes requirements for nearly all field-installed electrical systems that are not owned and operated by a utility on utility property. For example, it covers PV systems (Article 690), cranes and hoists (Article 610), EV charging stations (Article 625), electric welders (Article 630), computers (Article 645), communications systems (commercial and amateur, Chapter 8), and most other electrical installations.

The *NEC* covers low voltage systems (less than 50 volts) in Article 720 and high voltage systems (over 75 kilovolts) in Section 110. It covers systems with zero frequency (direct current) through radio frequency (RF) systems into the gigahertz range.

Equipment Grounding

With respect to grounding, the *NEC* requires that all PV systems have equipment-grounding conductors that connect all of the exposed metal surfaces of the system to a grounding electrode (690-43). This applies to any PV system that has field-installed wiring (items like solar wristwatches and path lights are excluded), even those operating at 12 volts. As noted above, the non-current-carrying conductors

Figure 1: Grounding Electrodes

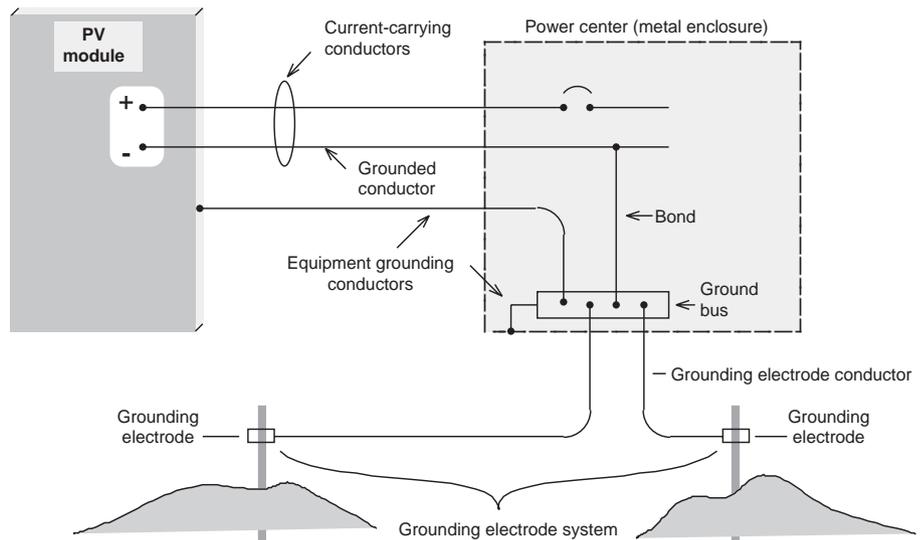

may be bare (uninsulated) or covered with green insulation. They are normally routed along with the current-carrying conductors.

System Grounding


When it comes to the grounding of one of the current-carrying conductors, different rules apply. Those systems with a system voltage over 50 volts are required to be grounded by having one of the current-carrying conductors connected to the grounding electrode. The system voltage is the maximum open-circuit voltage of the system as defined in Article 690.

PV modules (crystalline silicon-based) have open-circuit voltages that increase with decreasing temperatures. At temperatures below 25°C (77°F), the open-circuit voltage will be higher than the open-circuit voltage marked on the back of the PV module. Since this system voltage is dependent on temperature, a temperature correction factor is necessary (Table 690-7). The correction factor is selected based on the lowest expected ambient temperature where the PV system is to be installed, and is used as a multiplier on the rated, open-circuit voltage of the module. At low temperatures and with high winds, or in the early morning hours, the PV module may not heat up, so the lowest ambient temperatures for the area should be used.

The calculations required by Section 690-7 and Table 690-7 of the *NEC* indicate that a nominal 12 volt PV system has a system voltage of about 27 volts in worst case, low-temperature installations. This is determined by multiplying the 22 volts open-circuit voltage at 25°C (77°F) by a correction factor of 1.25 for temperatures below -21°C (-6°F). Therefore, 12 volt systems do not have to have one of the current-carrying conductors grounded.

A nominal 24 volt system has a rated open-circuit voltage of about 44 volts at 25°C (77°F). This means that one of the grounding electrode when the expected lowest temperatures are below about -10°C (14°F). Temperatures below this will cause the open-circuit voltage to exceed 50 volts.

Figure 2: Multiple Grounding Electrodes

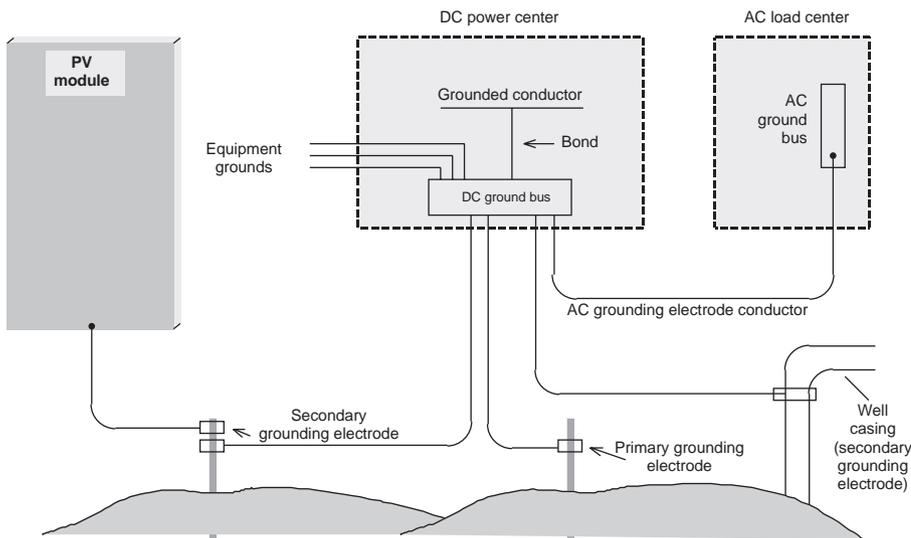

Prior to the 1999 edition, the *NEC* did not have Table 690-7, and the voltage multiplication factors were included in the instructions provided with listed PV modules. Since Underwriters Laboratories (UL) Standard 1703 for PV modules has not yet been revised, there will be PV modules in the distribution network that have the older instructions, duplicating the instructions in the 1999 *NEC*. Either the 125 percent factor in the PV module instructions or the Table 690-7 corrections should be applied, but not both.

System Grounding of 12 Volt Systems —Other Considerations

On 12 volt PV systems and some 24 volt PV systems, the grounding of one of the current-carrying conductors is optional, as noted above. However, in Articles 230, 240, and 690, the *NEC* requires that ungrounded conductors in any electrical system have overcurrent protection and disconnects. Since a 12 volt PV system must already have equipment-grounding conductors, a grounding electrode conductor, and a grounding electrode, there is a significant cost advantage and sometimes a performance advantage to grounding the system.

With the addition of one wire (the bond shown in Figure 1), the number of disconnect poles and overcurrent devices can be cut in half since these devices are not required in the now grounded, current-carrying conductor. Since each of those disconnects and overcurrent devices has some small but measurable voltage drop, eliminating as many of them as possible will improve system performance and increase reliability.

It should be noted that most PV power centers on the market have one of the conductors grounded internally and have provisions for only single-pole overcurrent devices and disconnects. They cannot be used in an ungrounded 12 volt system.

Furthermore, low-voltage fluorescent lamps start more reliably when installed in a grounded system and inverters and other electronic devices can be installed so that they radiate less noise when one conductor is grounded.

Equipment Grounding

Table 250-122 in the *NEC* specifies the size of the equipment-grounding conductors for each circuit. The size is based on the rating of the overcurrent device protecting the circuit and ranges from number 14 AWG (2 mm²) conductor in a 15 amp circuit to a number 3 AWG (26.7 mm²) equipment-grounding conductor in a 400 amp circuit.

Recent research has determined, however, that the equipment-grounding conductor for PV source and PV output circuits must at least be able to handle 125 percent of the PV short circuit currents. In most cases, this indicates that the equipment-grounding conductors for PV source circuits and PV output circuits must be the same size

as the current-carrying conductors. These are sized at 156 percent of the module short-circuit current. Proposals for the 2002 *NEC* will be submitted to reflect this requirement.

Of particular interest to PV installers is Section 250-122(b) of the *NEC*. It states that if the current-carrying conductors have been oversized to minimize voltage drop, then the equipment-grounding conductors must also be oversized in the same proportion. But the grounding conductors never have to be larger than the current-carrying conductors. Oversized conductors (above minimum ampacity requirements) are frequently used on long circuits between the PV array and the charge controller to reduce voltage drops in these lines. Table 8 in Chapter 9 of the *NEC* shows the cross sectional area of different sized conductors, and the calculation is straightforward.

Oversizing the equipment-grounding conductors is required by the *NEC* to ensure that overcurrent devices function properly during ground faults. Section 250-122(a) says that the equipment-grounding conductors do not have to be larger than the current-carrying conductors.

In summary, the equipment-grounding conductor should be as large as the current-carrying conductors in PV source and PV output circuits. In other circuits, follow Table 250-122.

Equipment that must be connected to the equipment-grounding system includes the exterior metal surfaces of PV modules, power centers, charge controllers, inverters, switchgear, outlet boxes, and overcurrent devices. Equipment listed to UL standards will have properly marked connections and instructions for connection of the equipment-grounding conductors.

The equipment-grounding requirement in renewable energy systems is usually met by using a separate conductor run with the current-carrying conductors. If the system uses metal conduit (and many commercial systems do), then the conduit can serve as the equipment-grounding conductor when used with listed fittings.

The connection of the equipment-grounding conductor can run from module frame to module frame and then to the switchgear and power center. The order of the connections is not critical and multiple connections or parallel connections do not cause problems. Each equipment-grounding conductor may also be run from the metal surface being grounded to a central point like the power center.

The connections and wiring for the equipment-grounding conductor must be continuous to allow fault currents to properly operate overcurrent devices. Removal of a piece of equipment for servicing must not interrupt the equipment-grounding system for other equipment.

Generally, module frames are made of anodized aluminum. The anodized coating or aluminum oxide that forms on aluminum surfaces is a relatively good insulator. This is why listed PV modules have a special point marked for connecting the equipment-grounding conductor. A stainless steel screw is usually supplied which helps to ensure a good electrical connection.

It should be noted that while the anodized surface insulation on PV modules makes it hard to get a good equipment-grounding connection, the aluminum frame is still exposed metal. If it is not grounded, it can produce an electric shock when ground faults occur. These can occur between the current-carrying parts of the module and the frames, or when the frames are inadvertently energized by other power sources.

Aluminum PV module frames do not stay well grounded when they are only bolted to the metal mounting stands. If the UL listing allows, and the module manufacturer provides special parts and instructions, some PV modules may be grounded through the mounting bolts to the frame. The *NEC* prohibits the earth from being used as the sole equipment-grounding conductor, so bolting the PV modules to a metal stand that is inserted in the ground does not meet the requirements for a safe installation unless a separate equipment-grounding conductor is used from the frame to the main grounding point or electrode.

The *NEC* requires that all conductors for a given circuit be routed together in the same cable or conduit. An exception is the equipment-grounding conductor for DC circuits. When secondary grounding electrodes are used and they are bonded to the primary grounding electrode (as described below for surge protection) the bonding conductor may become an equipment-grounding conductor and should be sized appropriately. In this case, the DC equipment-grounding conductor may not be grouped with the current-carrying conductors.

Grounding the Current-Carrying Conductor

The connection between one of the current-carrying conductors and the grounding electrode conductor is made only at one point in the system. This is known as the system ground. This single-point connection is usually made in a power center and is shown as the bonding conductor in Figure 1. If this connection is inadvertently made in more than one place (for example, at the PV modules and in the power center or at the load), then unwanted currents will flow in the

equipment-grounding conductors. These unwanted currents may cause inverters and charge controllers to be unreliable and may interfere with the operation of ground-fault detectors and overcurrent devices.

The use of RV and automotive electrical appliances and audio gear sometimes causes problems, as does the use of DC-powered radio and telephone equipment. Much of this equipment operates at 12 volts DC, with chassis and antenna ground connections that are common with the negative DC power conductor. It is pretty easy to get the negative DC conductor connected inadvertently to ground in two or more places when using these types of electrical devices.

The *NEC* also requires that equipment-grounding conductors be used with these appliances to ground the exposed metal surfaces. It becomes difficult to do this with a third conductor in a way that does not result in multiple point connections between the negative, current-carrying conductor and the grounding system. Solutions to minimize the problems include non-metallic enclosures to isolate the grounded chassis and ground-isolated antenna connections.

Listed power centers and disconnect switches usually have a provision for the single-point connection. In most DC power centers and AC load centers, the connection is automatically made when all equipment-grounding conductors, the negative conductors, and the grounding electrode are tied to a single, grounding bus bar which is also bolted to the metal enclosure.

When using standard, fused safety switches for disconnects throughout the system (PV array and subarray, battery, etc.), an insulated bus bar usually must be added. This is used to make the connections for the unswitched, grounded conductor running through the switch enclosure or subpanel.

There is frequently a bus bar supplied for the unswitched conductor. But this bus bar is sometimes grounded to the enclosure, presenting the opportunity for an inadvertent second grounding of the conductor that is intentionally grounded elsewhere in the system. Insulated, or ungrounded, bus bars should be used in these devices to prevent that second ground connection.

Grounding Electrode Conductor

The grounding electrode conductor (also known as the ground wire), is usually a single-conductor bare wire (it can also be insulated—color is not specified). It connects a grounding bus bar in a power center or another disconnect device to the grounding electrode (also known as the ground rod).

In the 1993 and earlier editions of the *NEC* this ground wire had to be the same size as the largest conductor in the DC system. In the 1996 *NEC* a number of exceptions, when met, allowed smaller conductors to be used. There are jurisdictions throughout the country that still are applying the 1993 and earlier versions of the *NEC* so some inspectors may require the larger conductors.

If there is only one conductor connected to the grounding electrode, then Section 250-166 of the 1999 *NEC* allows DC grounding electrode conductors as small as number 6 AWG (13 mm²) copper to be used. Appropriate mechanical

protection is required where this conductor may be subject to physical abuse. However, if multiple conductors are connected to the grounding electrode, a grounding electrode conductor as large as the largest conductor in the DC system must be used.

Multiple connections to the grounding electrode conductor refer to connections from the power system and do not refer to telephone, TV, cable, or other types of communications grounds. Multiple connections to the grounding electrode may also occur when several ground rods are bonded together to form a grounding electrode system, and when metal water pipes or well casings are bonded to the ground rod. Multiple connections are also common where DC and AC grounding electrode conductors are connected to the same ground rod. Several equipment-grounding conductors tied to the ground rod also nullify the use of a small grounding electrode conductor.

The reasoning behind not allowing a small grounding electrode conductor is this: if more than one conductor is connected to the ground rod, some of those conductors may be required to carry high fault currents. If only one conductor is connected to the ground rod, then the other properly sized and connected conductors in the system will carry the fault currents, and the smaller conductor to the ground rod will only be required to stabilize the system voltage with respect to earth. Only in lightning strikes and inadvertent connections to high voltages will the grounding electrode conductor be required to carry high currents. There are similar requirements and allowances for the AC grounding electrode conductor.

Practical Considerations

How then, can the system be connected so that a small equipment-grounding conductor can be used? One method is to designate a single grounding bus bar in the system. This bus bar is usually found in listed DC power centers. All equipment-grounding conductors should be connected to this bus bar. If there are multiple grounding electrodes in the system, the secondary electrodes should all be connected to this bus bar to complete the grounding electrode system.

If there is a requirement to provide a single-point ground for the AC portions of the system, then the grounding electrode conductor from the AC part of the system should be tied to this bus bar. Finally, the smaller (as allowed by the *NEC*) grounding electrode conductor can be connected from the grounding bus bar to the primary grounding electrode conductor. Figure 2 demonstrates these connections where the DC grounding electrode conductor is larger than the AC grounding electrode.

While this method meets the requirements of the *NEC*, it may not provide the best protection against lightning damage. Running all grounding conductors to a common point inside the building may increase the potential for damage from nearby lightning strikes.

In high lightning areas, it may be preferable to "bite the bullet" and use the larger grounding electrode conductor from the power center to the ground rod. Then secondary grounding rods and pipes and metal well casings can be connected directly to the primary grounding electrode without coming into

the building. Equipment-grounding conductors from the PV modules may also be run directly to secondary or primary grounding electrodes providing additional surge protection.

Each of the grounding electrodes described below, where used as a primary electrode, has a different requirement for the size of the grounding electrode conductor. See *NEC* Sections 250-66 (AC) and 250-166 (DC). If the requirements for the AC and DC grounding electrode conductors are different, the larger of the two should be used for any common conductor. The common grounding point should be associated with the largest required grounding electrode conductor.

Grounding Electrodes

In Section 250-50, the *NEC* considers metal building frames that are in contact with the earth and metal water pipes connected to the earth to be the preferred grounding electrodes. Unfortunately, wood frame buildings, plastic pipes, and plastic sleeves on copper pipes make these options frequently unavailable to the renewable energy user.

The *NEC* describes commonly available grounding electrodes, such as "made" electrodes (the common 8 foot (2.4 m) ground rod), concrete encased cables or electrodes, and ring electrodes which consist of buried conductors encircling the building. Made grounding electrodes are listed by UL and are connected to the grounding electrode conductors with clamps that are listed for this purpose. If the clamps are to be buried, they should be listed and marked for such use.

As a primary grounding electrode, the ground rod must be driven into the earth to a depth of at least 8 feet (2.4 m). Angles of no more than 45 degrees away from vertical are allowed where the ground is rocky. If these conditions cannot be met, then a second rod or one of the other grounding electrodes must be used to supplement the primary electrode. Best performance will be achieved if the second electrode is more than six feet (1.8 m) away.

In some areas of the country where homes are built on concrete slabs, a grounding electrode is buried in the concrete slab. This usually works better as a grounding electrode than an eight foot (2.4 m) ground rod.

Summary

Equipment and system grounding are important details in a renewable energy system. They reduce the potential for electrical shock and allow the system to respond properly to ground faults. Proper application of the *NEC* requirements for grounding will result in safer systems, higher levels of performance, and reduced costs. The requirements for PV systems are generally the same as the requirements for other electrical power systems.

Questions or Comments?

If you have questions about the *NEC* or the implementation of PV systems within the requirements of the *NEC*, feel free to call, fax, email, or write me at the location below. Sandia National Laboratories sponsors my activities in this area as a support function to the PV industry. This work was supported by the United States Department of Energy under Contract DE-AC04-94AL8500. Sandia is a multi-program laboratory

operated by Sandia Corporation, a Lockheed Martin Company, for the United States Department of Energy.

Access

Author: John C. Wiles, Southwest Technology Development Institute, New Mexico State University, Box 30,001/ MSC 3 SOLAR, Las Cruces, NM 88003 • 505-646-6105
Fax: 505-646-3841 • jwiles@nmsu.edu

Sponsor: Sandia National Laboratories, Ward Bower, Department 6218, PO Box 5800 MS 0753, Albuquerque, NM 87185-0753 • 505-844-5206 • Fax: 505-844-6541
wibower@sandia.gov

National Electrical Code® and *NEC*® are registered trademarks of the National Fire Protection Association. The 1999 *NEC* and the *NEC Handbook* are available from the NFPA, 11 Tracy Drive, Avon, MA 02322 • 800-344-3555 or 508-895-8300 • Fax: 800-593-6372 or 508-895-8301
custserv@nfpa.org • www.nfpa.org

Soares Book on Grounding, US\$38.95 postpaid in the U.S. from the International Association of Electrical Inspectors, 901 Waterfall Way, Suite 602, Richardson, TX 75080-7702 800-786-4234 or 972-235-1455 • Fax: 972-235-6858
iaei@compuserve.com • www.iaei.com

Wiles, J. C. and Bower, W. I., *Analysis of Grounded and Ungrounded Photovoltaic Power Systems*, First World Conference on Photovoltaic Energy Conversion, Hawaii, 1994



AUTOMAGIC BATTERY WATERING



WE MAKE WATER FROM YOUR GAS

Hydrogen and oxygen battery gas catalytically recombined into pure water and returned to each battery cell. Keeps battery topped off for extended periods of time and reduces maintenance costs. Explosive hydrogen gas is virtually eliminated from the battery area. Corrosive spray and fumes are contained and washed back into each battery cell. Electrolyte kept strong longer, extending the useful power and life of the battery. HYDROCAP Vents simply replace the battery's caps. Battery maintenance is greatly reduced. Write or call for more information.



Things that Work!

Hydrocap
CATALYST BATTERY CAPS

305-696-2504
975 NW 95 St.
Miami, FL 33150

New Product Announcement

Platypus 1000 Micro Hydro System

PM 1000 generates more usable power through:
perm. magnet alternators
unique impulse runner
maximum output: 750 Watts



Inter-changeable nozzle
delivers full range of flows

Durable construction:
Marine grade 316 steel runner
Aluminum casing to resist corrosion
Built for harsh & remote environments



Optional:
PM 1000 Charge Controller
with B-SR50 voltage taper
current regulator

SOLTEK provides a full
range of alternative
energy products

SOLTEK
SOLAR ENERGY LTD.

Independent energy solutions since 1986 Canadian Toll Free: 1-800-667-6527

#2 - 745 Vanalman Avenue
Victoria, B.C. V8Z 3B6
Website: www.soltek.ca
E-mail: soltek@soltek.ca

US distributor & dealer
inquires welcome


Call: 1-250-727-7720
Fax: 1-250-727-2135



Danby®

"Good things come in small packages"

- 7.8 cu. ft. Capacity Refrigerator.
- Reversible Door Hinges.
- Door Liner has large, functional divisions, plus a molded Egg Rack.
- Tall Upper Shelf accommodates 1 & 2 gal Jugs.
- 3 Easy-glide Shelves and a Large Crisper.
- Battery Powered Refrigerator Light.
- Automatic Lighter (piezo-electric)
- Automatic Safety Valve.
- European Style Door with Recessed Handles.
- Refrigerator is AGA & CGA Approved.
- No Electricity Needed.

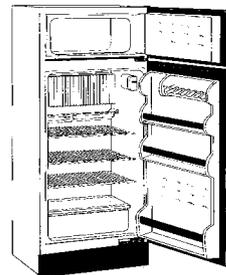

Propane
Refrigerator
DPR2260

\$995.00

Plus Shipping

(800) GO-SOLAR (467-6527) sales@energyoutfitters.com
136 S. Redwood Hwy, POB 1888, Cave Junction, OR 97523
Web Page: <http://www.energyoutfitters.com>

ipp
MEMBER

WRENCH REALITIES



Bob-O Schultze

©1999 Bob-O Schultze

Dummy loads have a bad rap and a worse name. Calling them shunt, dump, or diversion loads doesn't sound much better. Truth is, they can be pretty smart. A bit of free hot water or a few extra degrees warmth for the batteries in winter are good deals all around. It's not exactly a free lunch, but it's close.

A Diverting Experience

Using a shunt regulator to dump power when the batteries are full is the only realistic way to regulate DC hydro and wind generators. Both types of machines have to be connected to the batteries at all times to prevent unloading and overspeeding. Overspeeding a hydro plant causes serious voltage spikes and premature wear on all the moving parts. Overspeeding a wind machine can send your blades into the next county.

With automotive type alternators like the Harris Hydro, constant battery current is required to energize the field. The field windings take battery current to make the field into an electromagnet. Once the alternator is spinning, the field will energize itself. But if you take away the battery, the alternator will speed up, producing a higher voltage, which is fed back into the field, producing a higher voltage, etc. A 12 volt alternator can easily put out 120 volts. Reconnecting it to the battery would

cause a serious and potentially dangerous voltage spike in the system.

Shunt Regulation

There are two types of shunt regulators. Pulse-width modulation (PWM) regulators use transistors to turn the dummy load on and off very fast. As the batteries approach the set regulation voltage, the on times or pulses get shorter than the off times. At full regulation, the charging pulse is on only long enough to keep the battery at a given voltage. Some regulators hold the batteries at that voltage for a set period of time, called the absorption phase, and then allow the batteries to come down to a lower voltage, called the float voltage.

Connect/disconnect regulators will switch the dummy load on at the regulation voltage and back off at a lower voltage. The voltage difference between on and off is called the hysteresis. I call it slam bang charging. Either type of shunt regulator will keep your batteries full and your charging sources under control. The choice of which to use can be a factor of price, convenience, opinion, and whether you are dumping the power as AC or DC.

Et Tu, PV?

Can we use shunt load regulation on a PV system as well? It is used that way in many hybrid systems such as PV/Hydro, PV/Wind, and PV/Wind/Hydro (go ahead, flaunt it!). In a system with only PV, however, I generally don't recommend it. PVs don't overspeed, so they are pretty easy to regulate. There are some very good listed series-type regulators on the market these days. A good series PWM regulator is reliable, easy, and cheaper to set up than a shunt regulator. Like anything else, there are exceptions to the rules. Call your local Wrench for help.

AC or DC?

Diverting DC power makes good sense if you don't have a lot of it. It's also the way to go if you have a small inverter or none at all. The good news is that you can use a PWM shunt regulator, which tends to get the most years out of a battery bank. The bad news is that you are severely limited in your choice of dummy loads.

High wattage, low ohmage resistors are hard to find in configurations that will divert a wattage roughly equal to your charging sources. DC water heating elements are expensive and not available to fit many water heaters. You can use AC water heating elements to dump DC, but the resistances are high, so you won't shed much power.

These elements are designed for 120 or 240 volt systems and have a high resistance. The current they can absorb decreases as you lessen the voltage (check it out with Ohm's law), and they just don't do very much

for you at 12 or 24 volts. For example, a 1,000 watt element designed for 120 volts will have a resistance of 14.4 ohms. In a 24 VDC system with a regulation voltage of 28.8 VDC, that element will only divert 2 amps. Big deal.

Shunting AC power works best if you have enough excess power to do something wonderful like provide some of your hot water. Resistive loads designed to eat 120 or 240 VAC are everywhere and inexpensive. Water heating elements and space heaters are readily available in many wattage ranges. You need to use the connect/disconnect type of regulator when switching AC loads.

Worried about your inverter being large enough to run the dummy *and* your other loads? It's a moot point. If your batteries are full enough to require regulation, you likely aren't using the inverter for anything much anyway. If you do turn on a big load, the battery voltage will soon drop enough to shut the dummy off.

The Dummy Load

The best and most reliable shunt loads are resistors. Water heating elements and space heaters are just big resistors. Light bulbs are resistors too, but I can't recommend them. Remember Murphy's Law? "Anything that can go wrong, will go wrong, and at the worst possible moment." In other words, your light bulb dummy load will burn out an hour after you leave for Christmas week at Grandma's!

The best resistor for a shunt load is a water heating element. Who doesn't use hot water? These are available in both 120 and 240 VAC models from 1,000 to 4,500 watts. Sometimes a 240 VAC element fed 120 VAC will be just right for your diversion. Hey, it's just a resistor! My system uses a 4,500 watt 240 VAC element fed 120 VAC from the inverter. It eats about 1,075 watts, just right for shunting my Whisper 1000 wind genny.


Danger, Will Robinson!

With a large charging source you may heat too much water! Run your element through a thermostat and make sure your temperature and pressure (T&P) valve works. I like to set up a second voltage sensing switch and a space heater in case the water gets too hot and the thermostat cuts the power. Setting your regulation point 0.1 to 0.2 VDC higher on the second regulator works fairly well.

Shunting DC

Shunting DC is straightforward. You need a voltage sensing switch (VSS) and a dummy load capable of dumping the full output of the charging source without burning up. Use Ohm's law to calculate the resistance and the power-handling capability of the dummy.

Shunting to DC loads with a Trace C-30

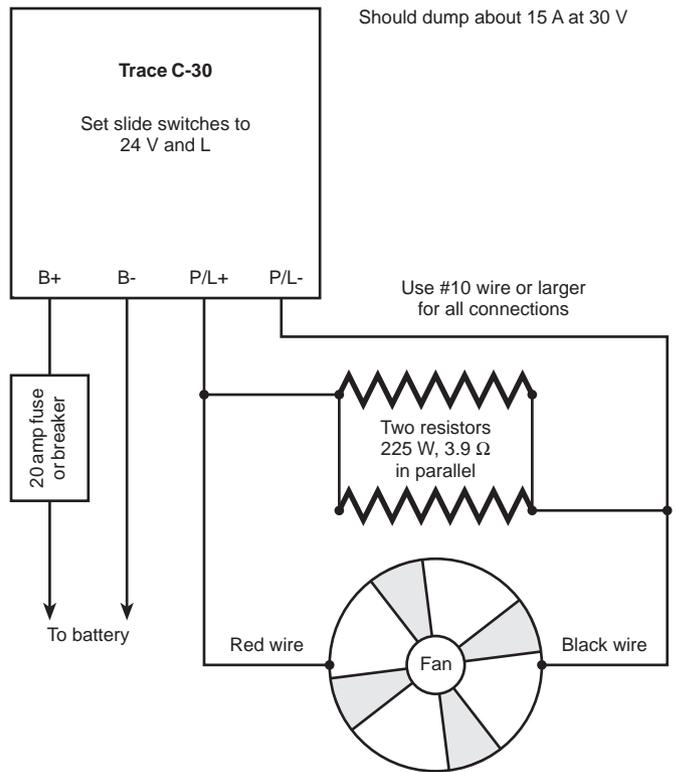

For example, say we need to divert 10 amps from a hydro plant charging a 24 volt battery system. First, choose your regulation point. Let's assume 28.8 volts. We use the formula:

$$R = E \div I$$

where R is resistance in ohms, E is potential in volts, and I is current in amps. This yields 28.8 V ÷ 10 A, or 2.88 Ω, in our system.

To figure the wattage value for our resistor, use the formula:


$$P = E \times I$$

where P is power in watts, E is potential in volts, and I is current in amps. So 28.8 V x 10 A = 288 W. We need at least a 288 watt resistor with a resistance of 2.88 Ω. The voltage sensing switch can be either a PWM type such as the Trace C-40 or AEE's Enermaxer, or a slam bang like the Trace C-30, Photron Simple Switch, or a homebrew.

Shunting AC with Trace SW Inverters

The Trace SW series inverters have three small voltage-controlled relays built in. Use them to control the coil of a larger relay capable of handling the current you need to dump. I prefer a solid-state relay such as Continental Industries S505-0SJ625-009. It has a

Shunting to AC loads with a Trace C-30

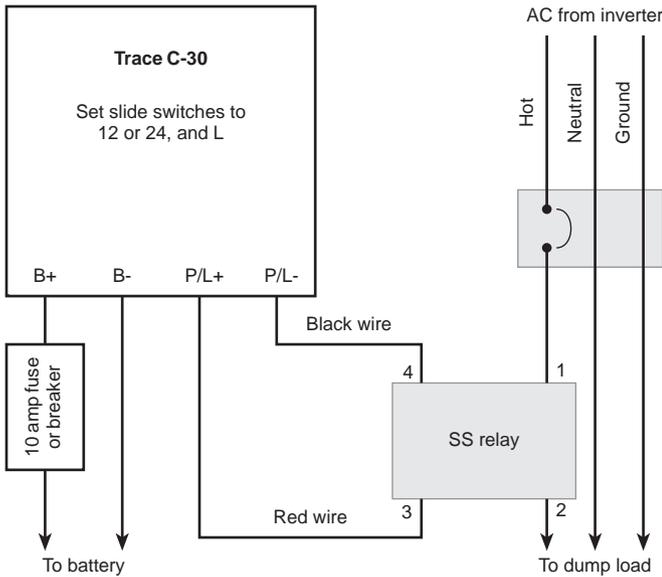


control rated from 90 to 280 VAC and contacts rated at 25 A from 24 to 330 VAC. That's plenty of range and headroom. See the schematic for details.

Shunting AC with Other Inverters


This works the same as shunting with the Trace SW, except that you'll need an external VSS and a relay with a DC-rated coil. If you want to use a solid-state relay, Continental makes the S505-0SJ625-000. It has the same 25 A and AC voltage rating on the contacts, but the control is 3 to 32 VDC. Your favorite renewable energy dealer can get these relays for you.

Any relay, and its wiring, needs to be mounted in a UL approved enclosure. The solid-state relays need to be mounted on a heat sink as well. I've found that mounting them directly to the back of a 6 by 6 by 4 inch

Shunting to AC loads with a Trace SW Inverter

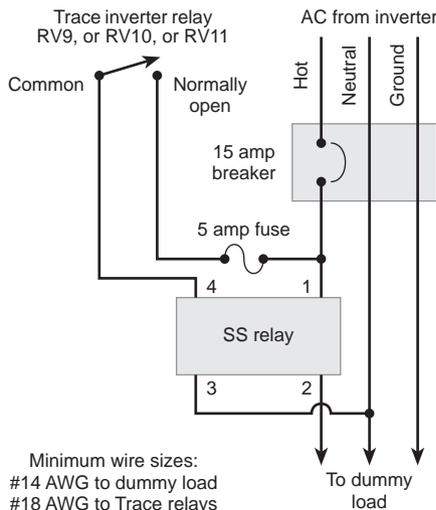

Shunting to Multiple AC loads with a Trace SW Inverter

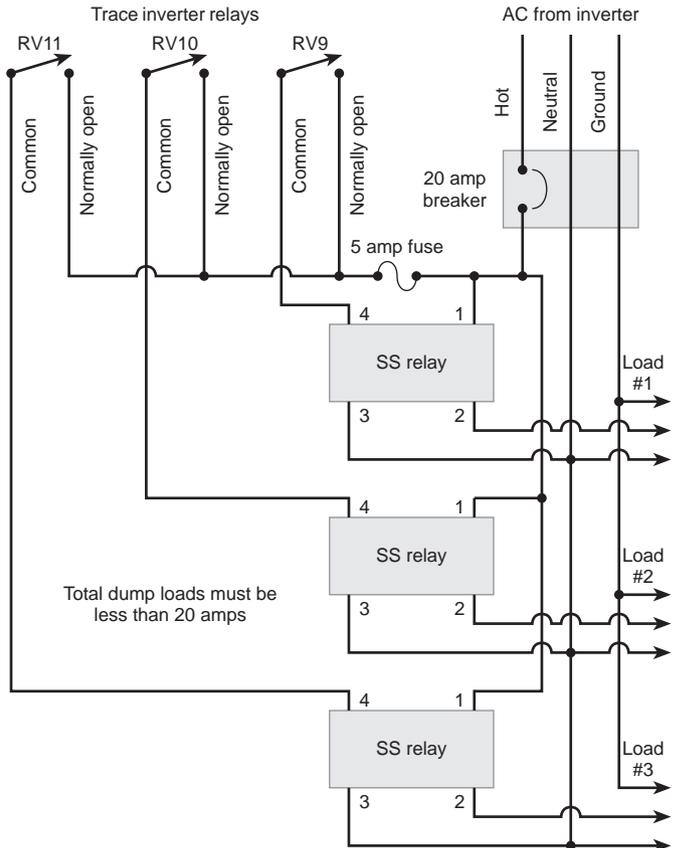

(15 x 15 x 10 cm) metal enclosure with heat sink grease works okay up to about 10 A at 120 VAC. If your load is more than that, you must heatsink and allow for heat dissipation.

It's a Wrap

Deciding which type of regulation is the best for your system isn't a trivial decision. Nor is it often cut and dried. My advice? Talk it over with your favorite Wrench. Support your local talent.

Access

Author: Bob-O Schultze, Electron Connection, PO Box 203, Hornbrook, CA 96044 • 800-945-7587 or 530-475-3401 • Fax: 530-475-3401
 econnect@snowcrest.net
 www.electronconnection.com

DC water heating elements: Alternative Energy Engineering, PO Box 339, Redway, CA 95560
 800-777-6609 or 707-923-2277 • Fax: 800-777-6648 or 707-923-3009 • energy@alt-energy.com
 www.alt-energy.com

Trace Engineering, Inc., 5916 195th NE, Arlington, WA 98223 • 360-435-8826 • Fax: 360-435-2229
 inverters@traceengineering.com
 www.traceengineering.com



The Greatest Breakthrough In Water Pumping Since Archimedes!!!

Water Self Sufficiency just got easy and inexpensive

Revolutionary patented water-powered "GLOCKEMANN" water pump now available in the USA

- Can lift to 600ft with just 30 inch drop in river.
- No more scrambling down river banks with containers of fuel for the pump.
- No more lifting your pump out of the river when it floods.
- No Electricity or Gas Bills for water pumping ever!
- Environmentally Irreproachable.

The Glockemann is available as:

- **160 WATER DRAGON.**
1250 gal/day to 30ft from 4 ft drop @ 1/2 gal/sec flow.
- **320 OASIS.**
5500 gal/day to 60 ft from 5 ft drop @ 2 gal/sec flow.

This worldwide patent protected pump should have been invented early this century, but we fell under the thrall of the infernal combustion engine as an answer to all our energy problems. U.S. Patent # 5613420

- **160 WATER DRAGON:** Engineering grade plastic, weight 22 lbs.
- **320 OASIS:** Cast Iron & Stainless Steel, weight 121 lbs.


320 OASIS PUMP OUTPUTS

USING 6" DRIVE PIPE

DELIVERY HEADS VS OUTPUTS IN U.S. GALLONS/DAY

DROP	15ft	30ft	60ft	100ft	150ft	200ft	300ft	400ft	600ft	FLOW
0ft				4830	3220	2430	1610	1200	810	2.3gpm
5ft			5500	3470	2520	1910	1290	970	640	2.0gpm
4ft		4250	2540	1950	1420	980	740	500	350	1.5gpm
3ft		5000	2950	1970	1300	990	660	460	330	1.6gpm
2.5ft	5200	3550	1950	1190	790	580	390	310	200	1.6gpm
2ft	4100	2250	1200	720	480	350	240	180	0	1.4gpm
1.5	2150	1150	510	340	210	170				1.0gpm
1.0ft	700	360	180							1.2gpm

DRIVE PIPE LENGTH TO BE BETWEEN 8 & 14 TIMES THE DROP
FOR GREATER LENGTHS USE A DRIVE PIPE'S SURGE TANK TO FEED THE DRIVE PIPE (SEE INSTALL GUIDE)
AS DRIVE PIPE'S BECOME LONGER THAN SUGGESTED FLOWS & OUTPUTS BEGIN TO REDUCE!



GLOCKEMANN PUMPS
NORTH AMERICA

AREARINE TRADING, LLC
610 Arroyos Dr. Unit 10 • Redlands, CA 92373
1-888-429-3025
Fax (909) 793-7369

U.S. DISTRIBUTOR FOR GLOCKEMANN/PECK ENGINEERING PTY. LTD., AUSTRALIA.

Tumbler Tech's New PowerPro DC to AC Power Inverters

PowerPro 125 125 watts continuous



Model Number : TP-125
Input Voltage : 10-15 VDC
Output Voltage : 115 VAC
Frequency : 60Hz +/- 3%
Continuous Output : 125W
Surge Power : 200 Watts

PowerPro 200 200 watts continuous



Model Number : TP-300
Input Voltage : 10-15 VDC
Output Voltage : 115 VAC
Frequency : 60Hz +/- 3%
Continuous Output : 200W
Surge Power : 400 Watts

PowerPro 300 300 watts continuous



Model Number : TP-300
Input Voltage : 10-15 VDC
Output Voltage : 115 VAC
Frequency : 60Hz +/- 3%
Continuous Output : 300W
Surge Power : 400 Watts

PowerPro 500 500 watts continuous



Model Number : TP-500
Input Voltage : 10-15 VDC
Output Voltage : 115 VAC
Frequency : 60Hz +/- 3%
Continuous Output : 500W
Surge Power : 800 Watts

Palo Alto HQ: (650) 494-3322 • Fax: 494-3062

e-mail: PowerPro@TrumPower.com

Web Site: www.josephson-ent.com/tumbler



The Midwest Renewable Energy Association

- Educational Institute Workshops -

MREA is a network for sharing ideas, resources, and information with individuals, businesses, and communities to promote a sustainable future through renewable energy and energy efficiency.

Membership and participation in the MREA are open and welcome to all interested individuals and organizations.

Workshop topics include:

- | | |
|---|----------------------------|
| Introduction to Renewable Energy Systems, Madison, WI | September 18 |
| Insulated Window Quilts, Madison, WI | September 19 |
| Wind/PV Hybrid Systems, Milwaukee, WI | September 24-26 |
| Basic/Intermediate Photovoltaics, Strum, WI | October 2-3 |
| Solar Hot Water, Custer, WI | October 9 |
| Active Solar Space Heating, Custer, WI | October 10 |
| Masonry Stoves, Custer, WI | October 16 |
| Wind System Installation, Custer, WI | CALL FOR DETAILS! Fall '99 |

Call or write for more information and course descriptions.

The Midwest Renewable Energy Association • PO Box 249, Amherst, WI 54406-0249

phone (715) 592-6595 • fax (715) 592-6596


e-mail: mreainfo@wi-net.com • website: www.the-mrea.org



CHANGE THE WORLD

Affordable On-Grid Solar Electricity

- ASE module with integrated 250-watt Advanced Energy utility-tie inverter
- Simple installation - no dc wiring, just connect to your load center
- Affordable - start with one, expand in the future without rewiring
- PC monitoring card option
- UL listed, American made

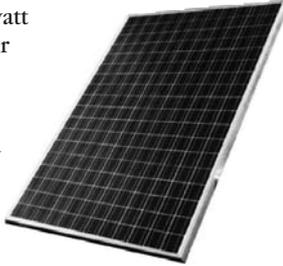

With our partner, Advanced Energy Systems, we offer you the tools to change the world, wherever you live, on-grid or off. Visit us at www.solarvt.com or www.advancedenergy.com

SOLAR WORKS, INC.

64 Main Street, Montpelier, VT 05602
Tel: (802) 223-7804 Fax: (802) 223-8980

THE DARKNESS ONLY STAYS AT NIGHT TIME * IN THE MORNING



Step Into the 21st Century ANYWAY.



Code-Compliant RE Installations:
Stand-alone or Grid-tied,
from Small Cabin to Village Power.
Consultation/Design/Site Survey
Sales/Installation/Service



Licensed/Insured Electrical Contractor CO License #3429

P.O. BOX 766 Frederick, CO 80530 Voice/Fax 303-833-4214

TOLL FREE: 888-39SOLAR

ALL THINGS MUST PASS * ALL THINGS MUST PASS AWAY *

IT WILL FADE AWAY * DAYLIGHT IS GOOD AT ARRIVING AT THE

RIGHT TIME * NO, IT'S NOT ALWAYS GOING TO BE THIS GREY *

Palouse Wind & Water

1011 Rothwell Road, Viola ID 83872
208-883-3676 or fax 208-883-3298
pwindh2o@moscow.com

We have 3 "NEW" Jacobs Wind Energy Systems.

They consist of the following:

- All new 20 KW Onan alternator
- Upgraded governor
- Upgraded gearhead & driveline
- Upgraded inverter & choke
- 120 foot galvanized steel tower with "big shoe" foundation
- 29 foot fiberglass & carbon fiber blades

Cost is \$28,850 plus shipping

State and Federal tax credits can apply

We also have four 17.5 KW Jacobs, also restored as above.
Prices start at \$18,900

While They Last!

Backup & Renewable Energy Systems For Homes, Cabins, & Other Applications

Be Prepared For Power Outages
Due To Y2K, Weather, or Other

- * Solar, Wind, & Hydro
- * Gas, Diesel, & Propane Generators
- * Trace, Solarex, BP, Winco,...
- * Full System Design & Tech Support



Call for FREE Information
Price List Packet or Order
Our Design Guide With
Specs for \$20



Natural Energy Systems, Inc.

1802 Richard Court * St. Paul, MN 55110
Phone: (651) 426-9577
Fax: (651) 407-1353
Email: energy.sys@pclink.com
Web: www.alternativepower.com

Super Efficient • Chest Style • Solar Powerable Refrigerators & Freezers

2 to 8 cubic feet inside volumes.
All units run on 12 & 24 Volts DC.

LOW KEEP

REFRIGERATION

Web & International:
RICHARD

POB 409, Fennville, MI 49408
Phone: 616-236-6197
www.datawise.net/~lowkeep

US Sales:
DAN

24651 Second Ave.,
Otsego, MI 49078
Phone: 616-692-3015

Let Us Build One For You!

EPOWER® Charger / Booster


Prices
start at
\$599.95



- 12V-50, 100, 200 Amp
- 24V-25, 50, 100 Amp
- 38-64 lbs.
- Overload Protection
- Regulated Output
- Safety On/Off Switch
- Extended run LP option available—some models
- OHV engine option available—some models
- We also make a high quality OHV, all copper winding, brushless, 3KW AC generator, 120V or 120/240V

EPOWER
1346 W- 400S, Albion, IN 46701
Phone 219-636-2099
www.epowerchargerboosters.com

Home & Heart

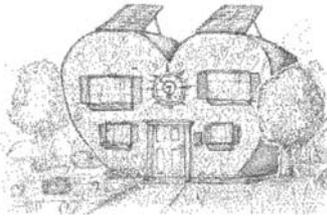

Kathleen Jarschke-Schultze

©1999 Kathleen Jarschke-Schultze

Bob-O read somewhere that people are afraid of death, electricity, and bees, in that order. I've read everything I could find on the subject of bees and beekeeping, and I find I only fear the first two. I will replace the third with "sharp knives" or "deep water."

Bee Adventurous

I went to pick up my bees on May first. I had set up my empty hives the evening before. On one hive I had painted a blue Celtic knot to help the bees identify their own hive. The two hives were next to each other on the south-facing, 18 inch high stand I had built.

The bee supplier we chose does not ship, so my friend Mona and I drove the 100 miles south to the bee ranch to pick up three packages of bees—two for me and one for her.

Each package includes three pounds of bees and a queen. They were all Italians, the most common bee in American beekeeping. The package consists of a box made of thin wooden slats with screen on the two broad sides. The queen is in her own cage, which is attached so it hangs down inside the box of bees. There is a can of sugar syrup that also hangs down into the package.

Bee Ranch

We knew we had arrived when we saw the orchard with all the bee hives. I went up and knocked on the door, and the beekeeper's wife answered. She said he was out in the trees somewhere, tending the bees, so she would get the bees for us. Okay, that seemed fine. We walked across the yard to a large metal building. The heavy door slid open and there in the warm, dark interior were our bees.

The three packages had been attached to each other with wooden lath. When you picked one up, the others came with it. The bees were buzzing quite a lot, being disturbed by the noise and light of our entry. The woman lifted the packages by the wood strips and followed me to my car. Several loose bees followed us too, the scent of the queens being irresistible to them.

I had put my station wagon's back seat down and spread a clean white sheet for our bees to rest on. When we set the packages in the car, the solo bees came in too. So we drove home with the packaged bees buzzing in the back and the strays flying around the interior of the car. Every time I would hear one by a window I would use the power control to lower the window and try to lose the bee. They were too wiley for that maneuver and would fly back to the screen of the closest package and rest there.

Hive Jive

By the time we got home it was about four in the afternoon and windy. We put our bee suits on and hived one of my packages. You can never get every bee out of the box. So after you pour out all that you can, you lay the the box at the entrance so that the remaining bees come out and enter the hive.

We then went up the road and hived Mona's bees. When I returned to my hives, all but one bee had gone into the first hive. I quickly hived the third package, not wanting to chill the queen. As with the first hive, I laid the package facing the entrance.

Earlier I had made some feeders using gallon jars with holes drilled into the lids. We placed these (one each) over the oblong hole on the inside cover of the hive, which is a lipped board placed directly over the frames. Then an empty full-sized super (basically a wooden box without a top or bottom) went over that. Finally, the outer telescoping cover was weighted down with a cinder block to make the hive weathertight.

The syrup in the feeder was a mixture of half water and half white sugar. We also placed one quart entrance feeders (Boardman type) on each hive. An entrance cleat reduces the entrances to conserve heat and allows the small number of bees (12,000) to protect their hive from intruders.

Bee Zen

The next morning I could hardly wait to check the hives. There were a couple of dead bees outside the entrance of the Celtic hive and about 25 dead bees outside the white hive. This didn't seem too bad. My plan was to wait for the first warm day and then release the queens. I had picked the packages up on a Saturday and the first warm day was supposed to be Tuesday. Bees need several days to accept a new queen. If released too soon, the hive bees might kill her.

On Sunday, I panicked. What if the queens starved before I released them? I called the bee ranch. The owner assured me that the queens would not starve, they just would not be able to start laying eggs yet. This was not an issue for me as my bees were starting out with new foundation and had to draw out the cells before the queens could begin laying anyway.

Bees are very serious about "bee space." If there is more than 3/8 inch or less than 1/4 inch, the bees will fill the



Kathleen lifts a frame out of the super.

space with propolis or spur comb. There's a little bit of slop between the frames and you have to get them evenly spaced. Since I was in a hurry to close the hives when I first installed the packages, I left too much space between two of the frames in the white hive. Now whenever I check it I have to scrape the spur comb off the inside cover.

Royal Outing

I released the queens on Tuesday as planned. They were alive and active. After I saw that, I quickly closed the hives to conserve heat. I ended up erecting a wind break next to the white hive. They became more active after that. I checked the hives one warm day. The Celtic hive has been very slow at drawing comb on the foundation. They are only working on four frames. The white hive has filled and capped several frames and is drawing comb on eight of the ten frames.

I think I need to put up a wind break by the Celtic hive. It is essential that the bees be able to keep the newly laid brood at a temperature of 92°F. With the downright cold weather we have had through May and into June, I am worried about the Celtic hive. I don't know if it can recover from this setback.

Bee Wrangling

I love beekeeping. It is totally fascinating. The more I am

around the bees, the less safety gear I wear. I usually wear just a head net and gloves. Once I was up filling the entrance feeders and I felt something crawling on my stomach. I lifted my shirt and a bee flew out.

I started a bee calendar in a monthly monitor datebook that had enough room on each day to keep notes. I record what the bees are doing and what I do to and for the bees. I also keep a running log of what plants and trees are blooming that the bees can utilize.

When I am out in my yard or garden and I see a honey bee, I just want to go sit and watch the hives. Sometimes I do just that. The bees come and check me out. Then they return to the hive. They are my friends, the bees.

Access

Author: Kathleen Jarschke-Schultze is thoroughly enjoying bee wrangling at her home in Northernmost California, c/o Home Power magazine, PO Box 520, Ashland, OR 97520 530-475-0830 • kjs@snowcrest.net

I recommend that you get these two books before you get your bees:

ABC and XYZ of Bee Culture, The A. I. Root Bee Library, US\$30 postpaid within the U.S. The A. I. Root Company, PO Box 706, Medina, OH 44258 • 800-289-7668 or 330-725-6677, ext. 3219 • Fax: 330-725-5624 kim@airoot.com • www.airoot.com • This is an encyclopedia on the scientific and practical culture of bees, first published in 1872 and reprinted regularly since. It's the bible of bees, a big thick reference, but kind of dry reading.

Honey Bees and Beekeeping, A Year in the Life of an Apiary, Keith S. Delaplane, University of Georgia. Available from Mann Lake Ltd. (see below) for US\$17.50 postpaid within the U.S. Great book, up-to-date on technique and treatments. Lots of pictures and a great read.

You also need to have your equipment before you get the bees. Here are several suppliers I have used:

Brushy Mountain Bee Farm, 610 Bethany Church Rd., Moravian Falls, NC 28654 • 800-233-7929 or 336-921-3640 • Fax: 336-921-2681 • sforrest@wilkes.net www.beeequipment.com

Mann Lake Ltd., 501 S. 1st St., Hackensack, MN 56452-2001 • 800-233-6663 or 218-675-6688 Fax: 218-675-6156 • beekeepr@mannlakeltd.com www.mannlakeltd.com

Mid-Continent Agrimarketing Inc., 1465 North Winchester, Olathe, KS 66061-5881 • 800-547-1392 or 913-768-8967 Fax: 913-768-8968 • mail@mid-conagri.com www.mid-conagri.com

Excellent Web site:
www.birkey.com/BLB/Beekeeping/besuply.html



THE ORIGINAL MULTI-ARRAY
White LED Flashlight
 The most practical flashlight ever made!



\$34⁹⁵
 Price Includes
 Batteries & Shipping
 Made in U.S.A.

Lasts Over 50 Hours
 on 3 'AA' Alkaline
 Batteries


It's Waterproof!

**Unbreakable LED
 Bulbs Last
 Thousands of Hours**



Call 1-800-522-8863
 To Order or for a FREE Catalog
 Visit Our Website at ccrane.com

MINI 12/8 **B. Z. PRODUCTS USA** **MINI 12/8**
 MINI PU CONTROLLER
 8 AMPS MAX FLOAT

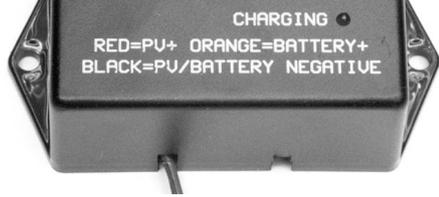

Low Cost. High Performance 8 amp PWM Charge Controllers.
 Ideal for RV's, marine, commercial applications.
 For all battery types & chemistries.
 Five year warranty
 Available world wide



B. Z. Products, Inc.
 7614 Marion Ct., St. Louis, MO 63143, USA
 tel: 314-644-2490, fax: 314-644-6121
 email: bpz@inlink.com

AC/DC Inverters, Solar Electric Modules

1-888-SOLARNOW
 Toll Free

HORIZON INDUSTRIES

**We Sell The Best
 & Service The Rest**

BBB MEMBER
 CAL SEIA

Mention This Ad & Receive A Free 100 Page Catalog
 2120 W Mission Rd (# L), Escondido, CA 92029
(760) 480-0403
www.horizonsolar.com

Water Pumps, DC Lights, DC Appliances

Batteries, Charge Controllers

**BATTERY BOX
 VENTILATOR**
 & BACK DRAFT DAMPER



- Positive hydrogen venting
- Stops back drafts
- Keeps batteries warmer
- Increases battery capacity
- Minimal power consumption
- Available in 12, 24 or 48 VDC
- * Trace SW Inverter or controller required

Power Vent \$79
 + \$7 S&H (cont. U.S.)
 CO residents add 3%
 Specify 12, 24 or 48V
 (48V vent \$104)




C.C. Solar Technologies
 POB 52, Salida, CO 81201
719.530.0718
 Or Ask Your Local R.E. Dealer

Harris Hydroelectric
 Hydro-Power for Home Use


Works with heads as low as 10 feet • Price starts at \$750


- New Features:**
- 17 bucket reshaped Pelton wheel
 - Powder coated castings
 - More efficient stator in high output models

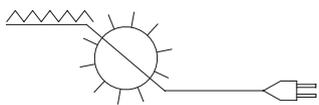

632 Swanton Road
 Davenport, CA 95017
 831-425-7652

*"The best Alternator-based MicroHydro generator I've ever seen."
 Bob-O Schultze, Hydroelectric Editor, Home Power Magazine*

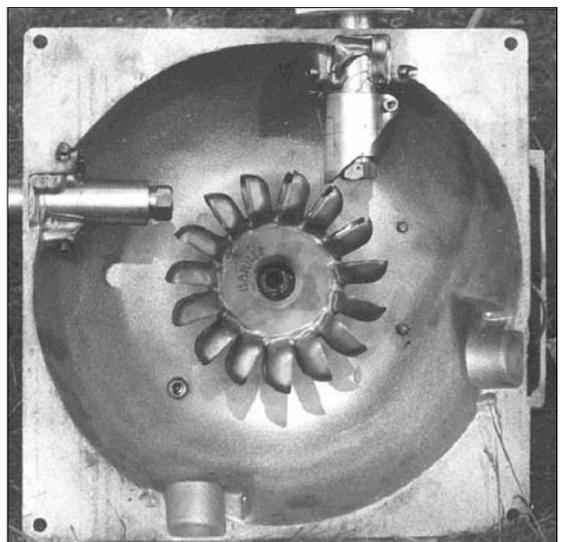

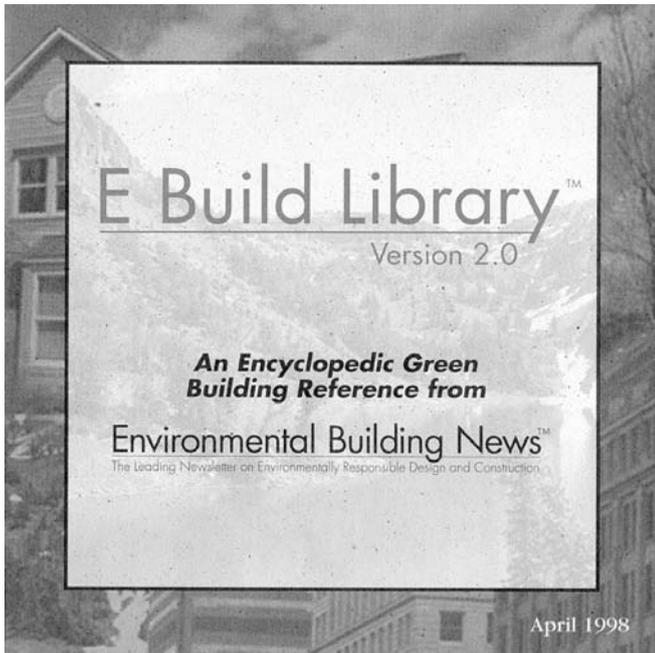

E Build Library CD-ROM, Version 2.0:

Compiled by
Environmental Building News

Reviewed by Joe Schwartz © 1999 Joe Schwartz

Accessing information related to sustainable green building technologies just got easier.

Brattleboro, Vermont based *Environmental Building News (EBN)* has compiled all of its back issues on a fully searchable CD-ROM. Now here's some material builders can get their hands on, and no heavy lifting!

Sustainable building has come a long way in the last decade, and *Environmental Building News* has been instrumental in fostering the movement. The monthly newsletter focuses on both residential and commercial scale projects. *EBN* is perhaps the best source for current perspectives on sustainable building systems and construction materials. While it has traditionally been more of an industry newsletter read by architects, designers, and contractors, the CD-ROM format makes it attractive to owner-builders as well.

The *E Build* CD is compatible with Macintosh system 7.1 or later, Windows system 3.1 or later, and standard UNIX operating systems. The files are in PDF format, and Adobe Acrobat Reader is included on the CD. The cost of the CD is US\$149 for non *EBN* subscribers, and US\$95 for current *EBN* subscribers. *EBN* accepts no advertising. All income comes from subs and sales of *EBN* products. A full set of printed back issues would cost over US\$300. A 12 issue subscription is US\$67 for individuals, US\$127 for organizations, and US\$39 for students.

E Build Library Version 2.0 includes 37 issues of *EBN*, from their first in 1992 to the November 1997 issue. All photos and graphics are included. In addition, a bibliography containing over 150 books, periodicals, and Web sites related to green building is provided. This alone is worth the price of admission. Finally, a green building products database provides access to manufacturers of environmentally responsible construction materials.

Without a doubt, what hooked me on this CD was *E Build's* search capability. Forget flipping through hard copy indexes and then trying to find the issue your buddy borrowed and never returned. The *E Build Library's* text search feature makes for super-efficient information retrieval. Type your subject into the text search box and related articles from all *EBN* back issues are listed. Each listing is hot linked to the specific article, making the information only a mouse click away.

By the time this issue of *Home Power* hits the streets, *E Build Library Version 3.0* will be out. The latest CD revision will include all of *EBN's* back issues through 1998, at the same price as version 2.0. Both the bibliography and the database from version 2.0 have also been expanded. I expect it will be just that much more of a great thing.

Access

Environmental Building News, 122 Birge St, Suite 30,
Brattleboro, VT 05301 • 800-861-0954 or 802-257-7300
Fax: 802-257-7304 • circ@ebuild.com
www.ebuild.com

Reviewer: Joe Schwartz, *Home Power*, PO Box 520,
Ashland, OR 97520 • 530-475-3179
Fax: 530-475-0836 • joe.schwartz@homepower.com
www.homepower.com



HAPPENINGS

CANADA

Aug 14-15, EarthFEST'99, Courtenay, BC. Exhibits and workshops on food, energy, shelter, transportation, water, waste, & sustainable communities. Non-profit event by Solar Energy Society of Canada & Canadian Organic Growers. Info: EarthFEST'99, 2050 Pine Place, Courtenay, BC, Canada V9N 3C1 • 250-334-8694 • Fax: 250-334-8695 earthfest@web.net • www.web.net/earthfest

Aug 11-14, North Sun '99. Biennial Conference on Solar Energy in high latitudes. Edmonton, Alberta. Info: Solar Energy Society of Canada, 116 Lesgar St #702, Ottawa, Ontario K2P 0C2, Canada +1-613-234-4151 • Fax: +1-613-234-2988 northsun.99@cyberus.ca www.solarenergysociety.ca

Alberta Sustainable House: Open on 3rd & 4th Saturdays (except holiday weekends), 1-4 PM, free. Cold-climate features/products based on health, environment, conservation, AE, recycling, low energy, self-sufficiency, & appropriate technology. Contact: Autonomous & Sustainable Housing, 9211 Scurfield Dr NW, Calgary, Alberta T3L 1V9, Canada • 403-239-1882 • Fax: 403-547-2671 jdo@acs.ucalgary.ca www.ucalgary.ca/~jdo/ecotecture.htm

The Institute for Bioregional Studies demonstrates & teaches ecologically-oriented, scientific, social & technological achievements. Info: IBS, 449 University Ave, Charlottetown, Prince Edward Island C1A 8K3, Canada • 902-892-9578

Vancouver Electric Vehicle Association, Call for meetings: 1402 Charlotte Rd., North Vancouver, BC V7J 1H2, Canada 604-987-6188 • Fax: 604-253-0644 rcameron@statpower.com

CHINA

Jun 11-15, 2000: Hydrogen 2000, Beijing, China. 13th world H2 conference. Info: WHEC2000/CICCST, Room 722 No 86 Xueyuan Nan Rd, Wei Gong Cun, Beijing 100081 China • (86-10) 62180145 Fax: (86-10) 62180142 zhenyj@public.bta.net.cn www.ciccst.org.cn/hydrogen

COLUMBIA

Oct 11, Expouniversidad 99—Energía, desarrollo y calidad de vida. Mechanical Engineering University of Antioquia, Medellín. Info: Marina Carvajal, carvaja@udea.edu.co

NICARAGUA

August 3-13, '99: Course on Solar Energy In Nicaragua (repeated Jan, 2000). Introduction to PV for developing countries: combination of lectures, field experience, and tourism.

Taught in English by Richard Komp of Maine Solar Energy Society and Susan Kinne of FENIX & Nicaraguan Engineering Univ (see *HP61*). PV panel assembly and installation of lighting systems in a rural village. \$750 (all expenses except air fare). Info: Barbara Atkinson • 215-942-0184 lightstream@igc.org

PORTUGAL

Nov 10–14, International Exhibition on Environmental Technology, Energy & Natural Gas. Info: Feir Internaciojnal De Lisboa 351-1-360-1500 • Fax 351-1-363-3893 expoambiente@aip.pt • www.emml.com

NATIONAL U.S.

American Hydrogen Association nat'l headquarters: 1739 W 7th Ave, Mesa, AZ 85202-1906 • 602-827-7915 Fax: 602-967-6601 • aha@getnet.com www.clean-air.org

American Wind Energy Association. Info about US wind energy industry, AWEA membership, small turbine use, & more. www.igc.org/awea

Reports on State Financial and Regulatory Incentives for RE. Order: North Carolina Solar Center, Box 7401 NCSU, Raleigh, NC 27695 • 919-515-3480 • Fax: 919-515-5778 www.ncsc.ncsu.edu/dsire.htm

Energy Efficiency and Renewable Energy Clearinghouse (EREC) offers: Insulation Basics (FS142), New Earth-Sheltered Houses (FS120), PV: Basic Design Principles & Components (FS231), Cooling Your Home Naturally (FS186), Automatic & Programmable Thermostats (FS215), & Small Wind Energy Systems for the Homeowner (FS135). Info: EREC, PO Box 3048, Merrifield, VA 22116 • 800-363-3732 TTY: 800-273-2957 • energyinfo@delphi.com www.eren.doe.gov

Oct 16, National Tour of Solar Homes. Info: ASES, 2400 Central Ave #G-1, Boulder, CO 80301 • 303-443-3130 • ases@ases.org www.ases.org/solar

Energy Efficiency and Renewable Energy Network (EREN), links to hundreds of gov't and private internet sites & offers "Ask an Energy Expert" online questions to specialists. www.eren.doe.gov 800-363-3732

Green Power web site: Discusses green power including deregulation, "green" electricity choices, technology, marketing, standards, environmental claims, & varying national & state policies. Links, articles & news. Global Environmental Options (GEO), & the Center for Renewable Energy & Sustainable Technology (CREST) www.green-power.com

Kids to the Country, an ongoing program to show at-risk urban children a country alternative. Info: PLENTY, 51 The Farm, Summertown, TN 38483 • 615-964-4391 ktc@thefarm.org

Tesla Engine Builders Association (TEBA): info & networking. One version is reported to consume 38 lbs of steam per HP/hr. Send SASE to TEBA, 5464 N Port Washington Rd Suite 293, Milwaukee, WI 53217 teba@execpc.com • www.execpc.com/~teba

Sandia's web site includes "Stand-Alone Photovoltaic Systems: A Handbook of Recommended Design Practices," "Working Safely with PV," & balance-of-system technical briefs, info on battery & inverter testing • www.sandia.gov/pv

Solar Energy & Systems, Internet college course. Fundamentals of small RE. Weekly assignments reviewing texts, videos, WWW pages, chat room, & email Q&A. Mojave Community College. \$100 plus \$10 registration. 800-678-3992 lizcaw@et.mohave.cc.az.us chacol@hal.mccnic.mohave.az.us

Federal Trade Commission free pamphlets: Buying An Energy-Smart Appliance, EnergyGuide to Major Home Appliances, & EnergyGuide to Home Heating and Cooling. Contact: EnergyGuide, FTC, Rm 130, 6th St & Pennsylvania Ave NW, Washington, DC 20580 • 202-326-2222 • TTY: 202-9326-2502 www.ftc.gov

The Interstate Renewable Energy Council, SEIA, & Sandia: handbook for government procurement officials and others on the specs and purchase of RE. US\$15 ppd (make checks to ASES), Interstate RE Council Distr Center, c/o ASES, 2400 Central Ave Ste G-1, Boulder, CO 80301

Solar curriculum for upper elementary & intermediate grades—Free! Six week science curriculum or individual sessions. Over 30 classroom presentations and demos using free or low cost materials. Student tested, teacher approved. Florida Solar Energy Center, Susan Schleith • 407-638-1017 www.fsec.ucf.edu

ALABAMA

The Self-Reliance Institute of NE Alabama seeks others interested in RE, earth sheltered construction, & other self-reliant topics. Info: SINA, 6585 Co Rd 22, Centre, AL 35960 • cevans9@tds.com

ARIZONA

Tax credits for solar in Arizona. A technician certified by the AZ Department of Commerce must be on the job site. Info: ARI SEIA, 602-258-3422

CALIFORNIA

Campus Center for Appropriate Technology, Humboldt State University, Arcata. Ongoing workshops and presentations on alternative, renewable, and sustainable living. Contact:

CCAT, HSU, Arcata, CA 95521 • 707-826-3551 • ccat@axe.humboldt.edu
www.humboldt.edu/~ccat

Aug 6-15, '99: 10-day Permaculture Design Workshop, Camptonville, Northern California. Led by permaculturists Dan and Cynthia Hemenway. Integrating human activity with the contour, soil, solar energy, and water flows of the site to provide water, food, shelter, energy, etc. Register for the full workshop or just the initial weekend. Enrollment is limited. Child care can be arranged with advance notice. Send SASE for a complete flyer. Scholarship applications may now be submitted—deadline: July 14. Scholarship & additional info: Birdsong Sundstrom, P.O. Box 125, Camptonville, CA 95922 • 530-287-3413 • birdsong@scn.net. To arrange for advanced work or online course credit, or to book another workshop in your own region, contact: Elfin Permaculture, P.O. Box 52, Sparr, FL 32192-0052 USA • Permacultur@aol.com

Aug 20-22, Home Education Conference, Radisson Hotel, Sacramento, non-religious home-schooling conf. Info: Barbara David, PO Box 231324, Sacramento, CA 95823 916-391-4942 • CHEC95@aol.com
www.HomeEdConference.com

Rising Sun Energy Center. Ongoing solar energy classes incl electricity, water heating, cooking, & kids day. Info: PO Box 2874, Santa Cruz, CA 95063 • 408-423-8749
sunrise@cruzio.com
www.cruzio.com/~solar

Siemens Solar PV training: Basic PV Technology Self-Study Course, & Comprehensive Photovoltaic System Design Seminar. Contact: Siemens Solar Training Dept, 805-388-6568 • Fax: 805-388-6395
cvernon@solarpv.com • www.solarpv.com

Institute for Solar Living, Sustainable Living Workshop series through October '99. Beginning & advanced solar electric systems, passive solar, ecological design, sustainable waste water design, straw bale, cob & rammed earth construction, & more. Info: ISL, PO Box 836, Hopland, CA 95449 800-762-7325

NCSEA Sacramento Solar Speaker Series, SMUD Customer Service Center, second Monday of every month, 7 to 9 pm. Speaker info, call 916-44-SOLAR

COLORADO

Sept 5-6, Tenth Annual Crestone Energy Fair, Crestone Town Park, Crestone, CO. Dealers, vendors, musicians, and builders together for sunny fun in the park. Energy Council/Green Goods Raffle. Solar and alternative building. Tour homes using PV, wind, solar thermal, straw bale, earthships, adobe, and more. Info: Mountain Power Design, Boxholder, Crestone, CO 81131 719-256-4838

Solar Energy International, hands-on workshops: solar, wind, & water power. One & two week sessions: PV Design & Installation, Advanced PV, Wind Power, Micro-hydro, Solar Cooking, Environmental Building Technologies, Solar Home Design, & Straw Bale Construction. Experienced instructors & industry reps. For owner-builders, industry technicians, business owners, career seekers, & international development workers. \$500/week. SEI, PO Box 715, Carbondale, CO 81623 970-963-8855 • Fax: 970-963-8866
sei@solarenergy.org • www.solarenergy.org

National Wind Technology Center, Golden, CO. Assisting wind turbine designers & manufacturers with development & fine tuning. Info: 303-384-6900 • Fax: 303-384-6901

FLORIDA

August 23–25, Energy '99, Achieving Your Goals Conference, Orlando. For professionals interested in energy & water efficiency, & renewable energy. Contact: JoAnn Stirling 800-395-8574
Fax 407-638-1010 • joann@fsec.ucf.edu
www.energy99.ee.doe.gov

GEORGIA

Nov 17-20, NAEVI '99, N American EV & Infrastructure Conference, Atlanta, GA. Info: EVAA, 601 California St #502, San Francisco, CA 94108 • 415-249-2960
Fax: 415-249-2699 • ev@evaa.org
www.evaa.org

IOWA

Sept 23–26, Iowa All-Energy Expo. Sheraton Convention Center, Cedar Rapids, Iowa. Events, solar cars, electric cars, Cedar Rapids electric bus, Electrathon, demos. Workshops: PV, wind, active vs passive, political issues. Iowa Electrathon Race. Info: I-Renew, PO Box 466, North Liberty, Iowa 52317 • 319-338-3200 • irenew@irenew.org
www.irenew.org

Iowa Renewable Energy Association (IREA) meets 2nd Sat every month at 9 AM, Prariewood, Cedar Rapids. All welcome. Call for schedule change. I-Renew, PO Box 466, North Liberty, Iowa 52317 319-338-3200 • irenew@irenew.org
www.irenew.org

KENTUCKY

Appalachia-Science in the Public Interest. Projects & demos in gardening, solar, sustainable forestry, & more. Info: ASPI, 50 Lair St., Mt Vernon, KY 40456 606-256-0077 • aspi@kih.net
www.kih.net/aspi

MASSACHUSETTS

Greenfield Energy Park needs help preserving Greenfield's historic past, using today's energy & ideas, creating a sustainable future. Info: Greenfield Energy Park, NESEA, 50 Miles St, Greenfield, MA 01301 • 413-774-6051 • Fax: 413-774-6053

Sept-Dec, Sustainability Series, workshops and lectures. Info: NESEA, 50 Miles St, Greenfield, MA 01301 • 413-774-6051
Fax: 413-774-6053 • nhazard@nesea.org
www.nesea.org

MICHIGAN

Tillers International, classes in draft animal power, small farming, blacksmithing, & woodworking. Catalog: Tillers Int'l, 5239 S 24th St., Kalamazoo, MI 49002 616-344-3233 • Fax: 616-344-3238
TillersInt@aol.com • www.wmich.edu/tillers

MONTANA

Sage Mountain Center: Life Skills Workshops. One day classes: Inexpensive earth-friendly home building, straw bale construction, log furniture, cordwood construction, natural & non-toxic interiors, & more. \$55 incl literature. Info: SMC, 79 Sage Mountain Trail, Whitehall, MT • 406-494-9875

NEVADA

July 23-28, 2000: Year 2000 Conference: GlobeEx—the Global Energy Exposition & ENERGEX 2000, Las Vegas, Nevada, Riviera Hotel Convention Center. Marketing U.S. alternative energy technologies to emerging markets. Pre-event certification workshops in PV and finance, technical & plenary sessions, keynotes, social activities, & energy tours in Nevada & California. Presenters: U.S. Secretary of Energy, Bill Richardson; Christopher Flavin, WorldWatch Institute; Admiral Richard Truly, National Renewable Energy Laboratory; Kun Mo Chung, International Nuclear Energy Academy; & Tim Mackay, Commonwealth Department. Exhibition & paper submission info: Ms. Kathleen J. Moon, PGI Exhibitions, 8989 Rio San Diego Dr., Suite 160, San Diego, CA 92108 • 619-294-2999 x 140
kmoon@pgi.com

NEW MEXICO

Profit From The Sun workshop series, Moriarty, NM. Renewable energy, energy conservation, sustainable living, & energy independence. Contact: James or Marek at PSF, Inc, 505-281-1300 days; or James at 505-832-1575 eves & weekends
proffit@flash.net

NORTH CAROLINA

How to get Your Solar-Powered Home: RE seminars through summer of 2000. Info: Solar Village Institute, PO Box 14, Saxapahaw, NC 27340 • 336-376-9530
solarvil@netpath.net

OHIO

Solar/wind classes. Second Saturday of each month, 10 AM to 2 PM. Tech info, system design, NEC compliance, efficient appliances. See equipment in use. Max 10 students. Register in advance. \$65/person \$85/couple (spouse only). In spring: hands-on straw bale post & beam building. Solar Creations, 2189 SR 511 S., Perrysville, OH 44864 • 419-368-4252
www.bright.net/~solarcre

OREGON

August 16-19, '99: Photovoltaic Workshop, Lane Community College, Eugene, Oregon. PV theory & application, & hands-on instruction. The class will end with a local installation. Instructor: Greg Holder, owner of Alternative Means in Fall Creek, Oregon, & resident PV expert at Lane Community College. Info: Northwest Energy Education Institute at Lane Community College 800-967-9687 or (541) 744-3977 www.nweei.org

Aprovecho Research Center, non-profit educational institute on forty acres in the OR forest. Internship Sept 1 and six week winter internship in Baja, Mexico: Study and research appropriate tech applications, learn Spanish, teach grade school, & work fruit orchards & gardens. Info: Internship Coordinator, Aprovecho Research Center, 80574 Hazelton Rd., Cottage Grove, OR 97424 • 541-942-8198

Oct 2, Solar Energy Association of Oregon: 20th Anniversary Conference, World Trade Center, Portland. Keynote speakers Jeff

Cook, Professor, Passive Solar Architect & Educator from AZ State Univ., & John Reynolds, Univ of Oregon, Building Energy Specialist. Speakers including Curtis Framel from the USDOE Million Solar Roof Program & Larry Sherwood from the Am. Solar Energy Society. Trade Show (open to the public), Building Projects & workshops, local solar energy specialists. Contact SEAO: 503-231-5662 • 205 SE Grand Ave, suite 202, Portland, Oregon 97214 www.oikos.com/seao

TEXAS

The El Paso Solar Energy Association bilingual web page. Info in Spanish on energy and energy saving. www.epsea.org www.epsea.org

WASHINGTON

Solar Energy International hands-on workshops in the San Juan Islands: Oct. 3, RE for the Northwest, \$75. Oct 4-9, PV Design & Installation, \$500. Oct 11-15, Microhydro Power, \$500. SEI, POB 715, Carbondale, CO 81623 • 970-963-8855 Fax: 970-963-8866 • sei@solarenergy.org

www.solarenergy.org. Or contact ianw@pacificrim.net for local information.

GreenFire Institute: workshops and info on straw bale construction. GreenFire, 1509 Queen Anne Ave #606, Seattle, WA 98109 206-284-7470 • Fax: 206-284-2816 wilbur@balewolf.com • www.balewolf.com

September 17-20, Water Harvesting, hands-on permaculture workshop, Orcas Island, WA. Contact: Bullock Workshops, c/o WE-Design, PO Box 45472, Seattle, WA 98145 or Michael Lockman, 206-567-5447 michaellockman@juno.com

WISCONSIN

Midwest Renewable Energy Association (MREA) Workshops. See ad. Call for cost, locations, instructors & further workshop descriptions. MREA Membership & participation: all are welcome. Significant others 1/2 price. Info: MREA, PO Box 249, Amherst, WI 54406 • 715-824-5166 Fax: 715-824-5399 • mreainfo@wi-net.com



Adopt a Library!

When Karen and I were living with kerosene lamps, we went to our local public library to find out if there was a better way to light up our nights. We found nothing about small scale renewable energy.

One of the first things we did when we started publishing this magazine twelve years ago was to give a subscription to our local public library.

You may want to do the same for your local public library. We'll split the cost (50/50) of the sub with you if you do. You pay \$11.25 and Home Power will pay the rest. If your public library is outside of the USA, then we'll split the sub to your location so call for rates.

Please check with your public library before sending them a sub. Some rural libraries may not have space, so check with your librarian before adopting your local public library. Sorry, but libraries which restrict access are not eligible for this Adopt a Library deal—the library must give free public access. — Richard Perez

To Adopt a Library write or call

Home Power®

PO Box 520, Ashland, OR 97520 USA
1-800-707-6585 or 541-512-0201 or FAX 541-512-0343
hp@homepower.com • www.homepower.com



Need a renewable energy quick-start for the ole' brain?

Home Power Quick-Start Subscription Special

our last six available issues, plus a one year surface subscription...all for \$45 inside USA
(Call for International Rates)

Home Power Magazine
P.O. Box 520, Ashland OR 97520 USA

800-707-6585 in USA, or 541-512-0201

VISA or MC



the Wizard speaks...

Resource Depletion

One of the possible threats to the ecological stability of the Earth is the depletion of resources from the environment. These resources are not limited to minerals and fossil fuels, but include the basic organic substances of life.

Almost all human activities tend to remove these resources from the biosphere. They wind up in manufactured things, in buildings, in garbage dumps, and as sewage that is dumped into the ocean. They also return to the environment as pollution of all kinds, including carbon dioxide from the burning of fossil fuels.

For similar reasons, fusion power is not an answer to the energy problem. In using water as a fuel, fusion will deplete hydrogen, an important organic constituent, from the biosphere. It will also increase the oxygen content of the atmosphere. There is no way to recover the hydrogen or to sequester the oxygen.

As resource use and population rise, a time may come when massive amounts of resources must be returned to the environment. This may be necessary to stave off ecological collapse. We can help to avoid this situation through such activities as composting and recycling. All activities which return resources to the environment or help to prevent further depletion should be encouraged.



**Charge Controller
Low-Voltage Disconnect
Circuit Board**

As featured in *Home Power* #60 and #63
Blank PC board \$20 • 8-Amp kit \$45 • 8-Amp assembled and tested \$60

Send check or money order to:
Eklektix, Inc., 2910 Carnegie Dr., Boulder, CO 80303
www.eklektix.com/solar • sales@eklektix.com

From the Fryer to the Fuel Tank

The Complete Guide to Using Vegetable Oil as an Alternative Fuel

Joshua and Kala Tickell

FULLY UPDATED AND REVISED SECOND EDITION

Now twice as big with new formulas and directions

Fuel any Diesel vehicle, generator, or engine with vegetable oil!

Complete instructions, photos, diagrams, parts lists, and resources for:

- Running a Diesel Engine on *Straight Vegetable Oil*
- Making Biodiesel from Used Cooking Oil
- Building a Small Scale Biodiesel Processor
- Growing and Processing Oilseed Crops
- Diesel Vehicle Ratings and Cold Weather Modifications

\$29.95 (Outside USA add \$5)
1-800-266-5564 or 419-281-1802 (24 hrs/day)
<http://www.veggievan.org/book.html>
U.S. check or money order payable to:
BookMasters, P.O. Box 388, Ashland, OH 44805

ELECTRIC CAR COMPONENTS & KITS

- *Reliable, Affordable Components
- *Large Library Of Adaptors
- *Most Experienced Tech Support
- *Design Assistance

Conversion Kits:


- **Basic & Deluxe Universal Kits*
Contain all drive system components. You add mounts, boxes, etc. to fit your model.
- **Complete Custom Bolt-In Kits*
Voltsrabbit for VW Rabbit, and *Voltsorsche* for Porsche 914. Completely prefabbed. No design or welding necessary. Kits include everything except donor car & batteries.

For Catalog, Send \$6.00 To:

ELECTRO AUTOMOTIVE
POB 1113-HP
FELTON, CA 95018

(Outside the U.S. & Canada, add \$5.00)

www.electroauto.com

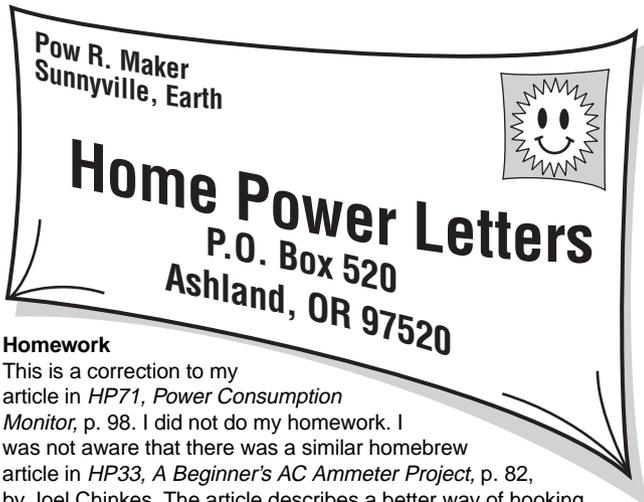

Homework

This is a correction to my article in *HP71, Power Consumption Monitor*, p. 98. I did not do my homework. I was not aware that there was a similar homebrew article in *HP33, A Beginner's AC Ammeter Project*, p. 82, by Joel Chinkes. The article describes a better way of hooking up an ammeter to a modified outlet. Joel called me to let me know, and I feel sorry for not mentioning his work. Michal Vojtisek-Lom mivst5+@pitt.edu • 877-6-MICHAL

Guerrilla Glitch

Dear *Home Power*, I live in the northeast. The utility company just installed a new meter. This new meter allows the meter reader to get the reading without leaving his vehicle.

I have a 900 watt (soon to be 2.8 KW) array and my Trace 4024 in sell mode. I noticed the reading on my utility bill does not match the actual meter reading. I suspected that the remote device keeps ticking forward and does not allow for "net metering" even though the mechanical part of it does.

I took a closer look (though the glass case, of course) at the way this meter obtains and transmits its data. The utility installed a sensor that simply counts the black lines on the watt-hour wheel. This sensor does not care what direction the wheel spins, it just keeps on counting those little black lines—UP! It is a modification to the standard KWH meter. You can identify it by the black sensor that covers the WH wheel in the front and a circuit board below.

Solar Guerrillas may have a problem with this type of meter. I will have to make some decisions now—make a call to the utility or allow for some confusion and lose my energy savings when they pull the meter. I estimate they will be off by 640 KWH over the year when the balance of the Kyocera 120s are installed.

With the use of Guerrilla Solar and energy saving measures, my grid KWH usage has dropped from 72 KWH per day to 8 KWH. Not bad for a 2,800 square foot home and (currently) 900 watts of solar. Anonymous Solar Guerrilla

Yipes! I suspect that the power company will replace your meter if they ever try to reconcile their remote reading with the reading on the actual meter. The bottom line is that the power company is actually charging you for the solar electricity you put online. They should be paying you since you live in a net metering state. Contact your utility and tell them you want to net meter your system. It will save you a nice chunk of change.

Good work! Reducing energy consumption from 72 to 8 KWH is quite a feat! Richard Perez

Y2K Prescription

Dear *Home Power*, what a pleasure to read an article on Y2K/RE that is so filled with common sense.

We have been in the RE business here in northwestern Ontario (Canada) for six years. Our homes, office, and shop run on solar &

wind, with backup generators (we are off-grid). Of course, our power consumption is small compared to average on-grid consumers.

Most of our business is for the summer cottage market as there are many lakes in the district where conventional power is not available. People are starting to catch on to the idea that you can have lights and a few other electrical conveniences at the cabin without the noise and fumes of a gas generator.

Living year round with RE is a whole different ball game—especially where winters are severe, daylight hours are short, and power consumption increases as a result. When people ask us about solar for Y2K for their conventional on-grid homes, we get some weird looks when we suggest that they: 1) install a good woodstove (that requires no electricity for fans, pumps, etc.); 2) dig a hole and build an outhouse; 3) purchase a good generator and be sure the wiring is installed properly. "But don't you sell solar panels?" is the usual response. "Yes, but..."

Your article sums up the rest of the story. In our opinion, too many dealers have sprung up and are trying to cash in on the Y2K scare. In reality, PV for this part of the world in January for conventional power users is unrealistic. Not so for the very wealthy dealers who try to make out, and likely may end up giving our industry a bad name. There are no quick fixes, as your article points out.

We have been supplying and installing RE systems for six years and intend to be doing so long after the Y2K bug (and whatever it brings with it) is squished and forgotten. Thank you for continuing to spread the good word. Power to ya! Jane Oldale, Frank's Alternate Energy, RR #3, Thunder Bay, ON Canada P7C 4V2 • sunwind@norlink.net www.sunwindwater.com

Fuel Cell Assumptions

While I enjoyed reading Joshua Tickell's *The Future of Transportation, HP70*, and concur with many of his conclusions and observations, I must take strong but respectful exception to his take on the role of transportation fuel cells. His statement, "fuel cell vehicles offer no relief from the shortage of fossil energy," is only, I feel, accurate given very stringent and unrealistic assumptions.

One such assumption: that hydrogen "would be produced from grid electricity." So? In the very same *HP* issue, the Guerrilla Solar profiles show hope for an end to hydrocarbon dominated grid power. It will take time for this change to happen, certainly, but it will take just as long for the hydrogen hybrid vehicle to become affordable and widespread. If the grid changes its sources, hydrogen becomes renewable.

And what of those living off-grid? Walt Pyle's excellent homebrew hydrogen article in *HP69* gives us a glimpse of what folks could do in the future. Imagine powering long-range vehicles without sacrificing garden acreage to biodiesel crops. I can think of no other fuel that gives people that freedom.

It seems to me that much of Joshua's anti-FC bias concerns the funding motives behind the current research frenzy. Right now, I agree: that cash is "a job creation program for desperate automakers," as he observes. But I say, so be it. We as hopeful consumers need research dollars to perfect the technologies, and the perceived market to mass produce the gadgetry and bring it to affordable levels. Personally I don't care where those R&D bucks originate. This research is good, period.

Also, just because this research focuses on the mobile FC for transportation, nothing prevents this focus from yielding immensely valuable applications yet unimagined. For example, rumor has it that extensive R&D is going into fuel cells powered not by hydrocarbons, but by ammonia (NH₃). Think of all the urine that could be filtered to create power... Sincerely, Jim Dempsey, Seattle, WA Jim@Dempsey.net

Jim, regardless of how much research money is spent on hydrogen fuel cells, it takes more energy to make, store, and convert hydrogen than hydrogen contains. No matter how you slice it, creating hydrogen with electricity and then converting the hydrogen back to electricity will consume more than 75 percent of the input energy. This means for every 1 unit of electrical energy you put in, you only get 0.25 units out. In terms of cost per kilowatt-hour, every \$1 spent on making hydrogen will yield \$0.25 in electricity.

Vegetable oil-fueled diesel cars and solar-powered electric cars are currently the two most efficient means of converting solar energy into long range transport (excluding walking, cycling, and horseback riding). Biodiesel contains at least 2.5 times the energy needed to fertilize, grow, harvest, process, and transport the fuel. This means one gallon of biodiesel contains 150 percent more energy than was used to make it. Diesel cars that get over 50 miles per gallon are on the market today. Over 3 billion gallons of used cooking oil are produced in the U.S. each year. There are over 50 million acres of cropland left fallow in the U.S. each year. In addition, the Department of Energy estimates that over 4 quadrillion BTUs of biodiesel (enough to meet the fuel needs of the U.S.) could be grown from algae on less than half a million acres of desert.

Our planet is quickly depleting its petroleum energy reserves. We should use the upcoming petroleum shortage as an incentive to institute efficient, inexpensive forms of solar-powered transportation. I refuse to wait around while flashy automobile ads tell me what a George Jetson fuel cell car might look like ten or twenty years from now. I want clean, reliable, inexpensive, decentralized, and accessible transportation today. Joshua Tickell • biodiesel@best.com

Induction Generator Kudos

I wish to commend Bill Haveland for the excellent article he wrote on induction generation in *HP71*. I have also done research and experimentation in this area (see *HP3*). There are a few things upon which I would like to comment.

My experience has been that higher efficiency is attainable using a three phase system, rather than the single phase system Mr. Haveland used. My systems use three wire output, three capacitors, and three phase transformation and rectification. Higher efficiency is attainable using a three phase system because it is balanced and the capacity will be greater because all three phases are being used in the generator. This may increase complexity somewhat, but it's more user friendly as the capacitors are now all the same size.

The primary demon contributing to low efficiency is the power factor (PF). This refers to the phenomenon in AC circuits in which voltage and current do not necessarily stay in sync. I have built induction systems where zero power made it to the batteries. Even though power was being generated, it would not make it through the transformers I used. This remarkable achievement I attribute to poor PF. This is a black art we are dealing with. Each motor and transformer combination acts differently. Single phase systems have inherently poor PF as the charging current can only come from the highest voltage part of the waveform. This is why a genset can only manage to put a fraction of its output through an inverter and into batteries.

There are techniques, other than using transformers, to get the power into batteries. Electronic power conditioning is a possibility. I have used Todd chargers and LCBs for this purpose. While efficiency is usually high, reliability often is not and seems to be related to the distance the customer is located from me. These devices are usually smaller and lighter than transformers. Some are tuneable which means that the system output can be optimized by adjusting a knob instead of changing capacitor size or using transformers with multiple taps. Custom built transformers can help here as they can be specified for the often odd frequencies and voltages.

I have some concerns over how the efficiency figures are arrived at in the article. I see in the first system (Bosque Del Cabo Lodge) that the rectifier efficiency is shown as 98.9 percent charging 12 V batteries. Even if center tapped transformers are used, which would create only one diode drop, this would produce about a 0.8 V drop in the standard diodes that he is using. In a 12 V system that is operating at 14 V, this would be $0.8 \div 14 = 5.7$ percent or a rectification efficiency of about 94.3 percent. It is not possible to achieve the figure stated in the article. This site also operates at 66 Hz or 4,000 rpm when the optimum speed for a head of 190 feet is 2,900 rpm and 48 Hz. The question posed in the article as to why one system operates at "abnormally high efficiency" might better be asked: why are the others so low?

Careful system design is everything. Although induction generation is an intriguing possibility, it will take more work and research to allow it to reach its potential. I enjoyed Mr. Haveland's article and I look forward to hearing from others regarding this very interesting subject. Paul Cunningham, CEO, Energy Systems & Design • 506-433-3153 Fax: 506-433-6151 • hydropow@nbnet.nb.ca www.microhydropower.com

Independently Dependent

Dear *HP* Being new to off-grid living, I have some concerns with renewable energy products. If it is the desire or necessity for one to be free of power companies, then independence is important. *Home Power* readers seem to be a self-supporting group of people—building, wiring, measuring, computing, and designing systems to provide energy for our everyday activities, whether cooking, washing, driving, lighting, or constructing solar installations for power. My concern is how can we be such an independent group of people and allow ourselves to be so dependent on the manufacturers of the equipment we use to accomplish this.

I have contacted most of the suppliers of inverter equipment and am finding they will not support purchasing or supplying documentation for the repair of their equipment—schematics, board layouts, circuit descriptions, repair parts, etc.

I realize not all want to, can, or should repair equipment, but for those that can do repair, that door is effectively shut as far as the manufacturers are concerned. One company source was candid and said, "We do not want you to repair your own equipment—we want to make the money." He went on to say they receive several calls per week from customers requesting schematics, etc. I find this to be a very interesting position since we can obtain documentation to repair a TV, microwave, VCR, CD player, DVD player, refrigerator, car, house wiring, but not solar equipment.

Even if I decide to repair the equipment and am not successful, I still have several choices. I can send the equipment to the manufacturer for repair at my expense, buy new equipment, do without, or design my own. Even if the equipment were under warranty, the manufacturer has the right to void it and charge me whatever they want for repairing the unit if I ruin it. Otherwise, I could purchase a new one. The point is that it should be my choice.

At the present time, I am required to reverse engineer the equipment and draw schematics, which is very time consuming. Safety, of course, is always a concern, but is this equipment more demanding than cars, brakes, steering, etc? I am interested in your position on this as you can bring a lot of pressure to the manufacturers. I do not believe anyone wants this for free, I am certainly willing to pay reasonable costs for documentation (my Expedition auto service manuals cost \$156). Any help you can provide for the long-term should help many individuals.

As a subnote, I am a "ham," WA7PNO (40+ years), and hold a first class radio license. I'm a Pentium III design program manager at Intel, a registered professional engineer, and have designed many solar controllers (using 8751 to 486s) for my RV over the years. I have all

of the necessary equipment to perform the repairs and the frequent upgrades I find necessary. John Young, Higley, AZ
john.e.young@intel.com

Hello John. Thanks for your letter. It echoes exactly how I feel. Inverters, controllers, and instruments should come with access to a full line schematic, printed circuit board layouts, and technical info on how they work and can be repaired. You are correct—this data is furnished, or can be obtained, with just about all other “appliances.”

I, too, am an FCC-licensed techie, and know how to run a DMM and a soldering iron. I too would like to be able to fix what goes wrong here, but can't because I don't have the “road map.” Richard Perez

Pedal Power

If I wanted to create a short-duration, simple, free, but effective source of AC electricity, couldn't I take an old electric motor which was made to work on AC, attach the moving part of the motor to a stationary bike, attach the leads to my home's AC network, and start pedaling? If so, I'm thinking this could produce enough juice to run my oil-burning (but electric ignition) boiler for short periods of time as a sort of winter-time-power-outage/Y2K stopgap. Am I crazy, or just electrically ignorant? Marc Bobrow, Windsor, CT
marc.a.bobrow@us.pwcglobal.com

Hello Marc. Yours is a frequently asked question, and your heart is in the right place. However, there are some technical problems with this idea.

The electric part of that oil burner could easily consume over 400 watts with pumps and blowers running. An Olympic cyclist can produce about 200 watts for a few seconds and about 75 watts for over an hour or so. Chances are you can't pedal hard enough or long enough to directly power that oil furnace.

Using an AC motor will work, but it will have to be spun at its rated rpm to produce 60 Hz electricity. Chances are that means spinning the motor at 1,800 rpm, which means a gear-up drivetrain from the bike. You'll have a lot of losses in this system, with much energy wasted in power transfer.

Consider putting a small (about 100 watt) DC permanent magnet motor (which is also a DC alternator) on the bike. Then pedal when you can and make about 75 watts while you are pedaling. Store this energy in a battery. Use an inverter to power the oil furnace and other small 120 VAC appliances. Richard Perez

Marc, a good article on the basics of pedal power is Pedal Power by John W. Hill, in HP23, p. 48. Another good one is Pushing Pedals, by David Haaren in HP31. HP56 features a pedal power homebrew article, Electro-Biking, by Bill Gerosa. You can search our Solar2 & Solar3 CD-ROMs for these articles and more. Joy Anderson

Baboon Problems

Dear *Home Power*, I get so much pleasure out of your magazine—thank you so much for doing what you do. It seems so few pleasures in life are guilt-free or good for one's health. I applaud the great work you've done over the years and hope you continue. Just got the *Solar3* CD-ROM—what an outstanding resource. The design is excellent.

I just moved from western Uganda to the forest in equatorial Tanzania where I do chimpanzee research and conservation. I've lived with solar for four years now. I use it for lights, radio, PowerBook, and battery charging. My new site has a stream, and I've just ordered a Lil' Otto—can't wait to try it out. My system is an eclectic mix of high-tech and ultra-low tech. In rural Africa, it can be a real challenge to design and maintain anything with locally available or handmade parts. I've been using six of AEE's 10 watt single crystal “clone” panels mounted on a wood frame with a Morningstar Prostar 20 to charge a 100 AH truck battery. I chose these panels because of their

compact size and ultra light weight—each like a clipboard—easy to pack in a bag and haul to Africa.

At my old place in western Uganda (about one mile south of the equator), I built a low (and I mean low) tech tracker made out of machete-made timber, a bungee (to return to east) and fishing line. From inside the house, you pulled on the line while looking at the ammeter! I built a solar hot water heater for about 30 bucks with a 10 gallon jerry can insulated with discarded bubblewrap and 30 meters of black plastic pipe as a collector—it worked great.

Here in Tanzania (about 29°E, 5°S), I'm in a forested valley. The resident baboons are my current problem. They like to sit on the array, which is currently mounted in a tree. I might try some heavy duty thorns, but in lieu of that, I envision some sort of efficient homebrew electric fence-type live wire. Maybe it needs an infrared sensor so it turns on in the presence of baboon? Any ideas? Bird droppings and leaves are one thing, but needless to say it is quite unpleasant to scale a tree and risk running into deadly green mambas, boomslangs, and cobras just so you can clean baboon crap off your solar panels.

I seem to always find myself having esoteric engineering problems. Deep cycle batteries are incredibly expensive here, of questionable quality (or not available in most of Africa), so we make do with truck batteries. I figure the PWM from Prostar helps this, and I try to cycle as shallow as possible and immediately recharge. Got two years+ out of my last Ugandan-made battery.

I use an “Eco-charger” bought from Real Goods to recharge NiCd's and alkalines for flashlight use. I've had great luck with this device, and would be interested to hear your opinion of it. It seems to charge my NiCd's quite well (lately I've been using the 1,000 mAH Radio Shack Hi-Cap AA's for flashlight use around camp). For forest use, I use alkalines (about 2 hours per day) which are then recharged in the Eco-charger. I generally frown on non-rechargeable batteries, but considering our snake situation (not to mention the leopards), the extra 1/2 volt gives a slightly brighter light. Also, NiCd's have that “sudden death” fading situation. We're running up and down valleys and cliffs and slithering through thick vines along bushpig trails following very fast chimpanzees for 12–14 hours a day with no food or water. Carrying an extra set of NiCd's is not desirable in this circumstance. (We do get to eat some of the chimp foods which are actually quite good, but only when they're not looking!) It's hard to know how much this charger extends the lives of alkalines, as you recharge them as soon as possible after each use, but I think the company's claim of 8–12 times is valid. I'm about to convert the entire research staff over to this system, and will let you know of the results. It seems to me this might be a good product for mainstream America to be using—those who are too lazy to use NiCd's (shame on them!) can simply pop them in and extend their battery's life considerably.

Another product of which I'm a huge fan is the Jade Mountain LED lamp. This is the 9 white-LED lamp made for them by LEDtronics. These babies draw around 60 mA or so (essentially nothing), and are just terrific. I cannot wait to see the great LED stuff that will come out in the next few years. I was testing a Holly Solar LED flashlight which I liked (alas—it was stolen). It had one LED powered by three AA cells, and I was thinking the 3 LED flashlight they make would be even better. Maybe not for anti-snake duty, but certainly in camp use it should extend battery life exponentially. I'm also in the process of an experiment with some homebrew LED lamps which came out of *Home Power* (LEDs from Hosfelt Electronics). A great white LED Web resource by the way is Don Klipstein (www.misty.com/~don/led.html).

In Uganda, the government estimates that the average household buys 100 liters of kerosene each year for light. With LEDs (the Jade Mountain small panel system comes to mind) one would think that this could be greatly reduced. I've often thought than an ultra simple portable task light with 3 LEDs or so, which could be powered from a

few cells and sold for about five dollars, would be a great product for Africa. Certainly LED replacement lamps for flashlights could be marketed here right now. NiCds are basically nonexistent in Uganda and Tanzania. People generally use horrible Chinese made (Matsushita licensed) cells which have a short life and are then discarded.

My partner Karen and I have often mused about starting a solar NGO to address some of these issues. I'm sure SEI has thought about these ideas quite a bit. I've often talked with a locally owned business in Kampala, Solar Energy for Africa, giving them new catalogs, and talking with them about marketing, new technologies, and some other product ideas. The solar market here is quite small, due to the high cost. Also, one needs to think about car batteries being used in the system, and factoring in yearly replacement costs. I would estimate that 90 percent of solar systems use car batteries. When you consider that three or four car batteries cost the same as one deep cycle, the cost works out very closely.

Needless to say, there is so much sun on the equator, not to mention year-round 12 hour days—no winter doldrums here. I can't help but envision Wattsun trackers with 90 watt BP panels everywhere. All power in Uganda is from a hydro dam on the Nile at Lake Victoria. As in many parts of the world, power cuts are a daily fact of life. I cannot help but think that if Uganda switched to compact fluorescents, "loading-shedding" (as they call it) would end overnight. We need to get the Chinese making cheap bulbs for the developing world.

Thanks again for the great work you do. If I can ever be of help, please let me know. John MacLachlan, The Jane Goodall Institute for Wildlife Research, Education, and Conservation, Gombe Stream Research Center, Gombe Stream National Park, Kigoma, Tanzania

John, thank you for your fascinating and entertaining letter. We're glad to hear about RE technology at work in the wilds of Africa. Would you consider writing up some of your systems for HP? I bet our readers would love to see the photos and hear more about what you're doing.

Though it's fun to dream of combining modern dairy technology with PV to make a baboon manure removal system, I think your idea of an electric fence wire sounds more practical. We've used electric fence here to keep raccoons out of our orchard and cows in the pasture. It's an easy load for PV to handle for most of the year, and the motion sensing switch is not necessary. The Parmak units use a small 6 or 12 volt module, not unlike the small panels you get from AEE. See HP21 for an article Richard wrote years ago on a homebrew fence charger. We've been pleased with an electric fencing product called Electrobraid (www.electrobraid.com), which is a nylon rope with copper wires woven into it. Perhaps the company could send you a sample for testing on baboons... Ian Woofenden

Fireplace Gizmo Found

Hi Richard, the latest *HP* arrived today, with lots of good stuff. Back in the *Letters* section, one reader asked about fireplace heat extractors. We had one about 20 to 25 years ago, back in the mid-70s, during the height of the energy crisis. I believe we got it at Sears. A quiet blower on the side pushed air through the grate, with the heated air coming straight out the front. We also bought a "fireplace doorscreen" from them, sized about two inches too short. This nicely complemented the approximately 2 inch high exhaust grill on which it perched. Lots of high temp cement later, it all worked. And the furnace stopped kicking in when we burned wood on winter nights.

I doubt that Sears still sells such a toy, but ya never know. And I'm sorry to say that I've completely forgotten the brand name of the blower/grate. Hmm...maybe a quick websurf would answer all... Hey, there's 69 hits using Alta Vista Advanced Query. The search term was "blower," and the boolean phrase was "fireplace and grate and blower." The first one that looked good is www.tfweb.com/fire/cozy.html, though they want \$395 for a unit.

Yipes! At least there's a line drawing, and it looks pretty close to what we used.

There may be other cheaper units out there. And I suppose that somebody who knew how to weld could whip one up and stick a blower on one end. Best, Jim Tolson • JTolson777@aol.com

Efficient Fans

Richard: A couple of months ago I wrote to *Home Power* for some advice on efficient fans with which to keep cool. Just wanted to give you an update. I found a pair of new-in-the-box Comair Rotron "Major" series fans at a surplus store for \$10 each. Digikey lists these fans as model MR2B3. 115 VAC, 30 watts, and \$56 new. Each fan will move 200 CFM. The only drawback is that they are noisy. So what I did is wire them in series. They still move a lot of air but they are now whisper quiet, and still draw only 30 watts.

I mounted the fans in a small frame that will fit in a window, also serving as a stand-alone unit that can be moved from room to room. Similar to "task lighting," the fans provide "task cooling." And just in time—we hit 100 degrees for the first time yesterday.

I think readers should be cautioned that these fans operate at very high speeds (even when running at half voltage) and are capable of doing severe damage to fingers. Some type of screening should be used as a finger guard to help prevent injuries. The fans are a bit spendy but I thought your readers may have some interest in a solution like this. Cheers, Chuck Penson • wa7zze@juno.com

Overpriced LED Lights

LED lights are overpriced! Who needs this kind of efficiency with an estimated payback of over 20 years? LED lights are the rage, but retailers could care less. How do you try to sell a \$100 flashlight and justify its lifetime of energy savings? This kind of efficiency is enough to put the lighting business out of business. Don Hall drhall@iglou.com

Hi Don. Good LED flashlights can be had for \$35 and under. This price has been going down quickly, as the price of high-quality LEDs drops. LEDs are getting cheaper as their demand for industrial applications increase. At the same time, their color spectrum is improving. Admittedly, common incandescent flashlights are cheaper (for now), but payback is not the only issue, either. Length of battery life for flashlights has long been a concern. With LED flashlights, fewer throw-away batteries are tossed, and there is less need to recharge the rechargeables. Personally, I like them and will soon be buying one for myself to keep in my vehicle and on my belt. My other flashlight is a 14.4 volt Makita—now that's a flashlight! Michael Welch

Evacuated Tubes

Hello everybody at *HP*, I'm a recent subscriber. I've only received one issue so far, but the *Solar 2* & *Solar3* CD-ROMs prove to me that I'm not going to be disappointed! Fantastic production!

I read an interesting article in a UK-based construction magazine today. Basically it was about solar power in general and discussed the future of government grants for such projects on an industrial basis (BIG projects). One topic that was briefly touched on was "Evacuated Heat Pipe Solar Collectors," a technology developed by NASA. These apparently consist of a 1 metre long glass tube which houses a strip of material in a vacuum which chemically reacts with light at all wavelengths, so it works even in the absence of direct sunshine! In the building where these are employed, which looks like a fairly large 5 bedroom house, they produce 40 gallons of piping hot water each and every day.

These things obviously exist already because they've been installed on the house in the magazine article, which was the centerpiece for a BBC TV programme called "Dream House." Sadly, I didn't catch the programme as I work in Saudi Arabia and rarely get back to the UK. I'm at the design stage for a totally off-grid house on a little (365 acre) island called Rakino in the bay of Auckland in New Zealand, so all my

vacation time gets spent in places other than the UK (too bloody cold and wet!).

To cut to the chase, have you ever heard of these evacuated tube creatures and what's the lowdown on them, price and availability-wise? Look forward to your reply, keep up the great work on the mag, and best regards. Buz Burrige • buzzard@prime.net.sa

Hello Buz, thanks for the kind words on the CD-ROMs. The evacuated heat pipe technology is not new and you've already found Thermomax who is probably the leading manufacturer. We have had a 20 tube Thermomax array here for over a year now. We have it mounted side-by-side with a conventional flat plate collector which has 25% more surface area. The Thermomax consistently outperforms the flat plate collector, especially in the winter when temperatures are low and the wind is blowing. Cost is somewhat higher than conventional flat plate thermal collectors, but not radically so.

We bought the Thermomax collector from our local solar domestic hot water contractor. They install a lot of them here in Oregon. The tubes are about 2 meters long and 10 cm in diameter. We have them roof-mounted, facing south at a 45 degree angle.

The Thermomax should work well in New Zealand, but it's probably not worth the expense in Saudi Arabia. They are most effective in locations with low wintertime ambient temperatures. Richard Perez

Generating Interest

Have enjoyed *Home Power* for a long time and learned much. Now it's time to put it to use.

We live just south of St. Louis, Missouri, in a rural area. Our home sits on top of a ridge with trees all around. Although we've never been without power for more than a few hours (due to a tornado), I am concerned since we have an almost entirely electric home. No utility services are available but electric (or propane, to which we are converting our space heat and water heater). Our water supply comes from a well approximately 550 feet deep which supplies three other families. It uses a 2 hp pump with 220 volt electric motor. It seems to draw no more than about 12 amps per leg but the fuses are 20 amps. I want backup power so I'm looking at a generator. I think I need one at least 5,500 watts and wonder if diesel would be best, even though it's more expensive. I would like your thoughts.

I've seen the ads recently for the Hanzi diesels. They are so much cheaper. Have you experience or reports on them? An article comparing different diesels would be helpful to many of us. Thanks much, Rich George RiGeorge@aol.com

Hello Rich. Let's just look at the pump first. Even though the pump consumes around 12 amps per leg, its starting surge is probably three times that. Measure this with an instrument such as the Fluke 87 digital multimeter (DMM), which can measure and record the amount of starting surge. Generators have no surge capability—max watts is max watts. Just for the pump, you should be looking in the 8,000 to 10,000 watt range.

Moving the space and water heating to propane is a great idea, its cheaper and more effective. Get a big yard bomb—our propane tank here is 500 gallons and we fill it only once a year. Consider also moving the cookstove over to propane. If you switch all the thermal applications from electricity to propane, wood, or solar, then the rest of your home's loads are relatively small compared to the pump you mentioned.

The degree of quality you need in a generator depends on how you use it. The less expensive imported models will not have the longevity of the domestic Kohlers and Onans. In a strictly backup application (like when the power's out for a day or two), you wouldn't put much more than 100 hours per year on the generator. With care, even the cheapest generator will run at least 1,000 hours. In backup service,

that's a total of ten years. By that time the generator will be obsolete, and the entire energy scene will have changed.

The Hanzi diesels are well made. In China, they power whole villages and run 24 hours a day. I really don't have enough hard information to write that generator article. We would have to install at least half a dozen of them and run them for a year or two to get real data. What I do have is hearsay testimony from many generator users. They write in here and share their experiences.

If you are strictly interested in short-term backup electricity (outage of an hour or two), then a battery and inverter combo costs only marginally more than a generator. For long term backup (power outages of weeks or months), the battery and inverter can greatly extend the life of the generator and reduce fuel costs. And once you have a battery/inverter combo, you can also add RE sources such as PV or wind.

In any case, please have your generator installed and wired to the appropriate loads by a professional electrician—someone who really knows how to do the installation. If the generator is not properly interfaced with your loads, then the grid can backfeed the generator (the generator will go down in flames, literally) or your generator can try to energize the entire grid when it's down. Richard Perez

World Sustainable Energy Fair vs MREF

A couple of years ago you reported that there were about 100,000 households relying on solar power for electricity and other power, mostly in the United States. This means that there are at least that many people with experience of using solar and other renewable energies for everyday use. If the climate of public policy ever changes, these people will be of use in teaching others how to do it.

So far it must be doubted whether the world's opinion formers and decision-makers have really grasped that we have serious problems with energy use and climate change. *Home Power* represents those who believe we don't have to wait for the big men to make their decisions but should go ahead without them.

The World Sustainable Energy Fair in Amsterdam (25–27 May 1999) was a contrast to such shows as the MidWest Renewable Energy Fair in Wisconsin. The American shows tend to concentrate on equipment for people doing it themselves, and are attended for the most part by people intending to do just that. It takes place outdoors and the equipment can be seen in action.

The energy fair in Amsterdam concentrated on government and big business and showed equipment inside a conventional conference and exhibition centre. The European Commission was represented with its ponderous policy documents.

Which of the two approaches is more effective? In Europe, governments seem to be taking serious steps towards promoting renewable energy, whereas in the U.S. governments are still inhibited by Big Business which seems to be unconvinced of the need to change. On the other hand, there seem to be many more individual Americans working with solar power on their own and rather few Europeans. Perhaps Americans need to do more to convince their governments, and Europeans need to do more work themselves.

I would guess that when the decision is made by the world's real decision makers (not necessarily those in the public eye), the changeover to a solar economy could take place astonishingly fast—perhaps in a single decade. So far, for all the talk about change, I don't think the world's leaders are yet serious.

Now, what would cause them to decide? Perhaps a hurricane in a place that has never seen one before, blowing in the windows of the White House, or a Wall Street bank? E.G. Matthews, Wimborne Energy Consultancy, 20 Brookside Road, Wimborne, Dorset BH21 2BL • Phone: 01202 885388 • wimtalk@compuserve.com

Electronic Subscriptions

Richard—first of all, great magazine!! I'm a new reader but am thoroughly impressed with the level of technical info and the overall commitment to renewables.

My question/comment is to inquire why you're not offering an electronic edition (Acrobat format) subscription option. It looks like you have sufficient internet infrastructure in place to make it work. Personally, I'm planning on ordering the CDs rather than hardcopy back issues and would love the opportunity to bypass the printed version altogether. I guess as long as you post the complete current version, I can always just download that and burn them to CD myself, but I would like the opportunity to financially support *Home Power*.

By the way, any idea of when the CD with the most recent (*HP61* and later) issues will be published? Thanks and Regards, Tom Ferguson
ferguson_tom@yahoo.com

Hello Tom, we've considered Acrobat-based electronic edition subs, but the cost overhead of collecting the money and keeping track of all the subs is too high. So we give the current issue away for free in that format. If you want to support Home Power, please adopt your local public library (see the ad in this issue).

Solar 4 (containing HP61 through HP70, battery & inverter lectures, video clips, and lots of other stuff) went on sale 21 June. Thanks for your kind words. We are pleased to be of use. Richard Perez

Pulse Charging

Hello Richard, I have been looking for information on pulse charging. Is it as good as commercial suppliers say? Can a system be homemade or is it too complicated?

Even I could build the controller from the article from *HP70* as posted on your Web site. Very good! Very complete! Thanks for a good site.
Richard Entenmann • entenmann@email.msn.com

Hello Richard. Yes, pulse charging is the way to go. Sandia Nat'l Labs has confirmed it with scientific testing. The only type of PV regulator to consider is a PWM type. Also the electronic desulfators work well. Pulse type units are more complicated than most charge controllers, but can be homebrewed. Sorry, no schematic for this yet. Thank you and I'm glad you liked the info and found it useful. Richard Perez

More on Cooling with Ground and Water

Richard, In *HP69*, Chris Snyder asks for information about soil cooling. Your answer and comment about being an electrical geek and asking readers for info is right on.

Enclosed is a newspaper article (*Northern Virginia Daily*, July 23, 1998) on the ground water cooling system we are installing. As the article states, on this site we have a virtually unlimited supply of cold water, however the same basic rules of physics apply, and one of our former employees cooled his 2,300 square foot home with a derivation of this system using a heat exchanger in his drilled well.

Ground cooling is not new technology. We were involved with a church renovation some years ago, and discovered a grating behind the pulpit, connected to a gazebo some distance away by a rock lined small tunnel. All this had been covered years ago by renovations, and of course the tunnel entrance was blocked with debris. A bit of clearing the entrance, and Voila! the whole picture comes into focus. The layout of the church: a raised pulpit at the rear of the building and a bell tower at the vestibule in the front, and we have exactly what your reader is looking for. Cool air flows from the gazebo, through the tunnel where it approaches the earth temperature, flows up through the grate behind the pulpit, over the edge of the pulpit stage, across the auditorium floor, and out the bell tower.

Unfortunately, a long tube is not as efficient as a manifold of tubes, since the temperature of the air decreases as it travels the length of the tube, and rate of heat transfer decreases as the differences

between the air and the ground decreases. The trick is to get the airflow so that the exit air is within 2–3 degrees of the ground temperature, and the excess water (humidity) is condensed out and collected. There are tables of heat transfer in abundance. However, given the vagaries of heat transfer and differences in installation, my suggestion is to make one grid, try it, and if more is needed, install another grid in parallel.

A little known fact about air conditioning is that the exit air from an air conditioner is very nearly 100 percent humidity, and only when mixed with room air and increasing the temperature to 70°F or so does the humidity drop. The humidity is important; if the dew point is about 60°F or below, we are comfortable at dry bulb temperatures of as much as 80°F. A ground cooling system will need about two or three times the flow of an air conditioner to be comfortable because it will be difficult to get the air below about 60°F in any area where air conditioning is needed.

Our system uses a recycled pair of freon heat exchangers with the flow path altered to give four progressive passes for the water so that the air flows counter to the water flow, which will get the air temps to within 2–3°F of the water temperature. We are installing the units in the attic, pulling the warm air from a plenum in the top hallway, and directing the cool air through the 12 chimneys to the rooms (a requirement because all the walls, interior, and exterior are solid masonry).

The water exits the coils only a couple of degrees cooler than the incoming air. We use the water for lawn sprinkling because the law frowns on putting "used" water back into the stream(?). Pat and Susan Goodman, Atlas Energy, 534 Redbud Rd, Winchester VA, 212603 • pat-goodman@telepad.com

Charge Controller Comments

I am starting to convert from the grid to energy independence. My starting point is solar electric. I have batteries, box, and ventilation; four 110 watt solar panels; and a 1.1 KW Exeltech inverter. I'm still missing the distribution box, the heavy DR3624 (for the well pump), charge controller, breakers, and lots of other small things, but I wanted to test out what I already had and needed a charge controller.

I found yours and built it (Thanks!). Had to do a bunch of substituting (local Radio Shack and my junk box were my only source of parts). I used a 7812 for the 7815 (24 V system), 10 K potentiometers for the 20 K versions, and a different power MOSFET. The voltage sensing part worked fine, but I couldn't get the MOSFET switch to work (or get a big enough heat sink on it for the 12 amps from the array) so I substituted a relay. I had to heatsink that 7812 to handle the 4 watt draw of the relay, but it's only on when the batteries are fully charged.

So far, it works great! Thanks again! But there's more—the addition of the relay also lets me add a float charge mode (the bulk charge mode is the one that you provide). I'm adding an LM317 adjustable 3-terminal regulator to the charge path and setting it so that it's enabled when the battery is not "charging." The battery is on the center pole of the double-throw relay. When the battery falls below 25.4 V (my "on" setting), the relay drops out and the arrays are connected to the battery directly. When it gets above 28.8 V (my "off" setting), the relay's enabled and connects the batteries to the 26.8 V current-limited path (limited to 1.5 amps by the LM317)—also fed by the array is the float portion! David Kunz • davek@clark.net



Do You Need Batteries?...

RAE Storage Battery Company

Since 1943... Quality & Service

Surrette Solar 1, 400 Series, Type CH 375 - L16

- 33.3% More Life Cycles
- Greater Reserve Capacity
- Expected Life of 10 Years
- Warranty 2 Years Unconditional
3 Years Prorated
- Available Wet & Dry Charged
- Engineered under careful guidelines
by Dave Surrette - Family owned
business Est. 1935



If you need Competitive Pricing
& Prompt Delivery call: 860-828-6007



Fax 860-828-4540
51 Deming Rd., POB 8005,
Berlin, CT 06037

Northwest Energy Storage is now wholesaling all Surrette
Batteries west of the Mississippi. Call 800-718-8816

LPM-10

State of Charge Meter.

Displays battery charge with 10 easy to read colored LED's. Great for use in RV's and Homes.... 12, 24, and 48 Volt models. Five year warranty. Available world wide.



B. Z. Products, Inc.

7614 Marion Ct., St. Louis, MO 63143, USA
tel: 314-644-2490, fax: 314-644-6121
email: bzp@inlink.com



PLANET DC

Now! RParts carries
Planet DC refrigerators
and freezers. We have
everything to meet all your
refrigeration needs at RPrices.
Guaranteed lowest.


Call 800-720-3907 for a brochure

RPARTS

REFRIGERATION PARTS SOLUTION

P.O. BOX 1903 SOUTH SAN FRANCISCO, CA 94083-1903
(800) 720-3907 (650) 525-1085 FAX (650) 525-1087
refparts@refparts.com www.refparts.com

Solar Pathfinder

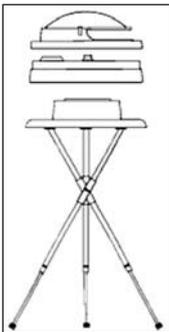

The Best Tool For Solar Site Analysis

We will be on the road during July & August. Please call & leave a message & we'll get back to you ASAP.

* Pathfinder with metal case & tripod
\$210, Handheld \$135 (+ shipping)

196 Moore Road, Dept. HP
Iron City, TN 38463-5332
Phone & Fax 931-724-6528



BACK HOME MAGAZINE

b/w on negative

3.0 wide

5.8 high

Make Money with your
RE Device?!

www.icbe.com

Register your Renewable Energy System with the International
Carbon Bank & Exchange, Inc. and gear-up for
Carbon Credit Trading.

CO₂ + SO₂ + NO_x = Savings

Ozonal Notes

Richard Perez

©1999 Richard Perez

Kathleen Retires!

After over ten years of working with *Home Power*, Kathleen Jarschke-Schultze is retiring. Don't worry readers, she will still be writing her regular *Home & Heart* columns, but she will no longer be part of our orders & sales crew. We all wish Kathleen the best of luck in her retirement and envy the free time she will have. Thanks, Kathleen, for the decade of hard and wonderful work you put into the RE industry and into *Home Power*.

Oregon's Net Metering Bill

It looks like Oregon may be the first state in the nation to pass a net metering bill that is not a net metering bill. After our success at getting our bill unanimously passed by Oregon's House, we ran into trouble in the Senate. Utilities stalled the bill for weeks in the Senate Public Affairs Committee and forced a number of compromises. We no longer get net metering, but now the utility can pay us only avoided generating cost (just like the existing, decades old, Federal PURPA law).

While the Oregon bill still does streamline the utility intertie process and forbid huge insurance requirements, it's been compromised to the point where all of us at *Home Power* are very disappointed. After a year of hard work in the political trenches, it's obvious where the political power really resides—with the utilities, not with the people. I predict that Oregon is going to become the number one Guerrilla Solar state in the USA.

ASES 99

I journeyed to Portland, Maine on June 12-17th to attend the 1999 American Solar Energy Society's annual conference. It was wonderful to meet and talk with some of the over seven hundred academic and industry folks who create and make the products we use daily in our RE systems. I was enlightened by the keynote address of Ross Gelbspan, author of *The Heat Is On*, regarding the facts of global warming. With utilities spending millions of dollars on ad campaigns to convince us that global warming is not happening, it was good and frightening to hear the truth.

We've got to stop pumping so much carbon into our atmosphere and we've got to stop it very quickly. According to Gelbspan, we need to cut our carbon emissions by 60 percent if we are to avoid global disaster. Get a copy of Ross' book and read it. Then put up some PVs and use them.

Guerrilla solar was a hot topic of discussion at ASES 99. I got a lot of "finger wagging" regarding *Home Power's* reports on guerrilla solar activity. Many folks told me it was irresponsible to report on it. Then the very same folks told me they were glad I was doing it because it gave them leverage when dealing with utilities—sort of a good cop, bad cop routine.

I was astounded when an installing dealer stood up and announced to the group that he'd installed thirteen guerrilla solar electric systems in the last three years. Even though his

state has a net metering law, the utilities are blocking interties in the usual manner—huge insurance requirements, gold plated disconnects, and expensive, needless engineering reports. I was also amazed to discover how many of the ASES attendees were operating their own guerrilla solar systems. While I can't say who they are, or where they are, be assured that guerrilla solar activity is not restricted to the grassroots level; it is also occurring at the academic and professional levels.

MREF

While ASES was interesting and informative, I was glad to get on an airplane and head for the Midwest Renewable Energy Fair. MREF is my idea of the ultimate in fun—PVs out in the sun where they belong, wind gennys actually producing power, and thousands of folks who are now using RE in their own lives. See a pictorial report on MREA's tenth annual fair on page 50 of this issue.

Next year, MREF and ASES will join forces. These two energy events will run back to back in Madison, Wisconsin. We have high hopes that we can fuse the industry and academic side of RE with its grassroots users. Don't miss the MREF/ASES combo in Madison next year. Put these dates on your calendar: MREF 2000 on June 16–18 and ASES on June 19–22. Come and join us for an entire week of RE activities.

Guerrilla Solar

We finally have a Guerrilla Solar Manifesto; see page 77 of this issue. Guerrilla solar makes a difference—it's putting RE online where it belongs, it challenges the century-long utility monopoly, and it shows the powers-that-be that we are serious about RE and our desires to heal this planet.

I put out a call to guerrillas everywhere. Send us information about your activities and we'll publish it. We'd like to have 300–500 words describing your system—what your charging sources are, how you are using the RE, and *why* you are a solar guerrilla. And send us 4–6 photos to choose from. We will keep your identity and location top secret. Let's keep up the pressure—it's scaring the hell out of the utilities!

In order to clear up confusion about guerrilla solar, we have come up with a definition: *Guerrilla solar is the unauthorized placement of renewable energy on a utility grid.*


Trends in Renewable Energy

Those of you with email should be reading the newsletter *Trends in Renewable Energy*, published by Bill Eggertson of the Canadian Association for Renewable Energies. You can request a sample copy by emailing sample@renewables.ca, or you can subscribe by emailing subscribe@renewables.ca. It's free and well worth the read.

Access

Richard Perez, *Home Power*, PO Box 520, Ashland, OR 97520 • 530-475-3179 • Fax: 530-475-0836
richard.perez@homepower.com
www.homepower.com



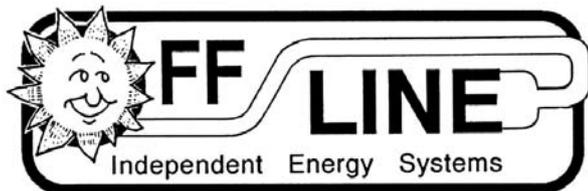

CA Lic. #661052

Our 16th Year Offgrid!

**We will meet or beat any other company's prices.
We provide excellent service and technical support.**

Residential Power • Water Systems • Communications
Wind • PV • Hydro • Custom Design • Installation • Mail Order

All Major Brands

SIEMENS



SunFrost



**California Rebates!
(559) 877-7080**



e-mail: ofln@aol.com
http://www.psnw.com/~ofln

located in the central Sierra, near Yosemite



OFFLINE
P.O. Box 231
North Fork, CA
93643

**CATALOG
AVAILABLE**

Global Power Systems

Specializing in the Design and Installation of:
Remote Home • Grid Connected • Back Up
Complete Power Systems

Tel: (909) 245-8040 31739 Riverside Dr. Suite L.
Fax: (909) 245-9611 Lake Elsinore, CA 92530

Qualified & Certified



Back Issues of Home Power!

Check out **HP65...**

It contains an index of all articles back to issue #1.

You can buy back issues individually:

- \$3.25 each for 17 through 20
- \$4.75 each for 21 through 45 (except for 35, 36, 38, 40, 41)
- \$5.75 each for 46 through 72 (except for 59, 60, 63, 64, 67)

- OR -

Deal #1: All available back issues for \$100

Deal #2: 6 or more issues (of 21 through 72) for \$4.00 each (sent bound printed matter).

for U.S. ZIP codes only, see page 81 for international back issues.

Check with your local library—through interlibrary loan you can get back issues.

The Jackson County Library in Oregon and the Alfred Mann Library at Cornell University have all issues.

Or, get the CD-ROMs—*Solar2 (HP1–HP42)*, *Solar3 (HP43–HP60)* and *Solar4 (HP61–HP70)*.

Home Power, PO Box 520, Ashland, OR 97520 • 800-707-6585 • 541-512-0201



**Good Info!
Good Deal!**
800-707-6585
in USA

Q&A

To Goo or Not to Goo

Dear Karen and Richard, I have a question which I think may also be of interest to your readers. Maybe you have already addressed it, but I could not find any reference. Several companies make a substance which is essentially a copper paste, used for reducing the resistance in terminal connections while also providing anti-oxidation and anti-seize benefits. Thomas and Betts (a large electrical supplier) is one source. What do you make of this? Should I use it when assembling my system components? Seems to me like a no-lose situation, except that it is somewhat expensive.

Aluminum paste is much cheaper and more easily available but I think it's primarily used as an aluminum anti-oxidant. Just a minor point—thanks for your time.
Geoff Yokum • Bfragrant@aol.com

Hello, Geoff. I am anti-goo. I've tried several varieties and have concluded that "tight and bright" is the best way to go with all connections. The only exception is when using aluminium wire or cable, then No-Ox goo is a necessity.

Over time all mechanical connections need to be polished bright and tightened—even if covered with conductive goo. In order to do this, the old goo must be cleaned off, which is difficult and messy. Go with tight and bright!

Controllers for Multiple Sources

Dear Mr. Perez, I am in need of advice regarding selection of appropriate charging equipment for a system being installed on my farm. Equipment selected to date includes two Trace 5548 inverters stacked for 120/240V, a 48 volt 700 AH battery bank, Platypus Hydro, 1,200 watts of solar panels, and a 15 KW diesel generator. My question is regarding selection of the charge controller(s) and possible inclusion of a pulse device to reduce sulfation. Platypus pushes their own charge controller which is complete with diversion load, and of course Trace would like to sell their offerings.

Should I use two charge controllers, or is a single controller adequate for this system, and if so, whose? Is there a single pulse unit that will be compatible with these three charging sources, i.e., generator, solar, and hydro, and where can it be found? If a pulse unit is not appropriate for all three charging sources, which one(s) should be integrated with it for the most benefit? The primary charging source will vary seasonally. Who manufactures the most suitable pulse unit, and where can it be obtained? Lee Mitchell • leemitch@ij.net

Hello Lee, I'd put individual regulators on the PV and the hydro. The Platypus regulator works great with their hydro, and I'd use it. The PWM charge controls I like best for PVs are made by Heliotrope (see their ad in any Home Power). The electronic desulfator is not dependent on the charging source, so that isn't a concern. Check out the Power Pulse in the Abraham Solar ad in this issue. We've been using ours for three years now and have seen good results. Richard Perez

Really BIG Batteries

Dear Home Power, My local air force base has big batteries that were removed from UPSs mounted in nuclear missile silos. I can get them for 0.01 cent per pound.

The batteries weigh 1,600 pounds each and are manufactured by Charter Power Systems (www.cdpowercom.com). Each one was removed after it failed a load test dropping under 80 percent capacity. Some have damaged tops or stripped filler caps, but load tested okay. The capacity is 635 AH at a 6 hour rate. They are 16 volts, plus or minus 2 volts.

Would these batteries be good for my off-grid system if I set up three of them for 48 volts? Logan & Jenni Bryce wlbruce@3rivers.net

Hello Logan. I'm leary of used lead-acid batteries. Most of the time they are a lot of trouble for a battery that will maybe last a while, but mostly won't. Also, how are you going to move a 1,600 pound battery? We have some 350 pounders here and moving them is a huge pain. Richard Perez

Controllers Without Batteries?

Hey there Richard, a quick "Can I do this?" question. I have two solar collectors (water heat) connected in a closed loop system. The system includes a high efficiency 18 watt DC permanent magnet motor/pump (purchased from AAA Solar) and an expansion tank. I am trying (operative word: "trying") to drive the motor by connecting it to a 17 watt solar panel and a charge controller (14 volts, 8 amp rating). The problem is that the motor won't always start running when the panel is exposed to the sun. When the panel is in the sun and I disconnect the positive lead between the charge controller and the motor and then reconnect the leads, the motor starts right up and runs fine. It will continue to run until a cloud causes the motor to stop, at which time I have to start it by disconnecting the positive lead again.

I discussed this problem with several of my engineering friends. They think the problem has to do with the fact that the motor (at rest) appears as a dead short to the charge controller, and so the charge controller won't pass the electricity on to the motor. I understand their

point, but it appears to me that the charge controller is allowing the panel voltage to be drawn down to almost nothing due to the starting current draw. The problem I have with my theory is that I thought the charge controller isolated the solar panel from the load. Thanks for any information you can give me. Daniel Wigant • DWigant@ElectroD.com

Hello Dan. Get rid of the charge controller. You don't need it and it's getting in the way of performance. If the PV will still not reliably start the motor, then you need a device called an LCB (linear current booster), which you can purchase from virtually any PV dealer. Your techie friends are partially right, the charge controller is probably not operating because it is designed to work with a battery in the circuit. Since you don't have a battery, the voltage may not be getting high enough to allow the charge controller to operate. Get an LCB and everything should work properly. Richard Perez

800 vs 900 MHz

Hi Richard, Did you at one time have an article on extending the range of an 800 MHz phone? I'm trying to extend mine to reach out and touch someone on my 40 acres. Scott Wilson • swilson@bigbear.com

Hello, Scott. No, we've never done an article on that although it's been discussed in our Letters section. The best thing to do is replace your phone with one of the new 900 MHz 2 GHz spread spectrum cordless models. They work glitch-free at over 1/4 mile right out of the box.

I believe C. Crane and Co (www.ccrane.com) sells a replacement long range antenna and the new spread spectrum cordless phones. Also, you can purchase hot-rodded cordless phones for remote use from Childs Play, 655 Redwood Dr., Garberville, CA 95440 • 707-923-2934. If you have any local ham friends, they could hotrod the antennas in an afternoon. Richard Perez



**HELIOTROPE
GENERAL**

b&w
on negative

2.3 wide
9.9 high

**WE WROTE THE BOOK ON
ELECTRIC CAR CONVERSIONS**

CONVERT IT How-To Manual
by Michael Brown with Shari Prange

Expanded & Updated 3rd Edition
\$30.00 tax & postage included

"We built Mr. Brown's car,
and we won." Bruce Burk,
St. Johnsbury Academy,
1991 American Tour de Sol
Open Class Winner.

www.electroauto.com



ELECTRO AUTOMOTIVE
POB 1113-HP, FELTON, CA 95018



Home Power MicroAds



Rates: 10¢ per CHARACTER, including spaces & punctuation. \$15 minimum per insertion. Please send a check with your ad. Your cancelled check is your receipt.

Help us prevent fraud! Home Power MicroAds from individuals must supply serial number(s) for equipment being sold. Businesses must supply a published phone number(s) and a physical address. If at all possible, please pay for your ad via personal or business check or credit card.

While Home Power is doing everything we can to prevent fraud, we can assume no responsibility for items being sold.

PURE CASTILE & VEGETARIAN SOAPS. Handmade in an AE environment. We also have hard to find natural bath & body care products. FREE catalog: SIMMONS HANDCRAFTS 42295 AE, Hwy 36, Bridgeville, CA 95526

HYDROELECTRIC SYSTEMS: Pelton and Crossflow designs, either complete turbines or complete systems. Assistance in site evaluation and equipment selection. Sizes from 100 watts to 5 megawatts. Manufacturing home and commercial size turbines since 1976. Send for a free brochure. Canyon Industries Inc., P.O. Box 574 HP, Deming, WA 98244, 360-592-5552.

XXXXXXXXXX USED SOLAR MODULES XXXXXXXXX
XXXXXXXXXX 64 Watts \$319 XXXXXXXXX

BZ 8 amp pwm controller \$49, Ex 2KW inverter SB, 110 amp charger New \$850. Buy, sell New/Used, Trace, NiCds. refrigerator. Try to match anyone's prices. Call or send S.A.S.E. to Craig Eversole, 10192 Choiceana, Hesperia CA 92345 for free flyer. M/C VISA Discover 760-949-0505

The big-box Solar Mart may talk a good game from behind the order desk, but are they actually out there doin' it? VERMONT SOLAR ENGINEERING takes pride in being a reality-based dealer/designer/installer. We know the products because we work with them every day— PV, hydro, wind & domestic hot water, from components to complete systems. So reject the romantic salespeak offered by the volume dealers and give us a call. Thanks! 800-286-1252, 802-863-1202, 863-7908(fax). PO Box 697, Burlington, VT 05402. Our Website contains our installation portfolio and attractive sale pricing—www.vtsolar.com-Visa/MC

START YOUR OWN TECHNICAL VENTURE! Don Lancaster's newly updated INCREDIBLE SECRET MONEY MACHINE II tells how. We now have autographed copies of the Guru's underground classic for \$18.50, Synergetics Press, Box 809-HP, Thatcher, AZ 85552. (520) 428-4073, VISA/MC.

INTERESTED IN INTENTIONAL COMMUNITY? Communities magazine offers complete, updated listings of intentional communities not found in the Communities Directory. Practical information about forming/joining community — alternative buildings & structures; getting off the grid, legal, financial & land options. Plus Eco-villages, Cohousing, decision-making, conflict resolution, successful communities, children in community, research findings on community living. Quarterly. \$18/yr, \$5/sample. 138-HP Twin Oaks Rd, Louisa, VA 23093. (540) 894-5798.

EARTH-SHELTERED HOMES This definitive manual by noted authority Loren Impson features detailed building instructions for the amazingly affordable and practical Ferro-Cement Dome Home. Only \$15 from Sun Life 71 Holistic Hollow, Mount Ida AR 71957

OVER 23 YEARS IN SOLAR Business. Talmage Solar Engineering, Inc. has served customers from the islands off the coast of Maine to Honduras. We take time to figure out the exact needs of each customer, design and engineer systems that will work and give the best possible price on equipment. Give us a chance to show that our experience will help you build a solar power system that will work. We are always here to give back up support. 18 Stone Rd Kennebunkport, ME 04046 207-967-5945 E-mail tse@talmagesolar.com website www.talmagesolar.com

DC GENERATORS, Onan, 1500 Watt, 12 Volt, perfect for RE system, military surplus, 3 hp engine, 2 cylinder, OHV, \$595 + shipping, discount for quantity orders, Endless Energy Systems, 2147 185th Street, Fairfield, Iowa 52556, 515 469-2748, e-mail: michaelh@lisco.com

CHINA DIESEL Generators 3Kw to 15 Kw \$1795 to \$4395 12 & 24 Volt diesel battery chargers 1 gal/20 hrs \$1195.00 870-427-9621 Dave Hall PO Box 60 Bergman AR 72615

I AM A SOLAR WHOLESALER looking for retailers to carry my solar electronic and hobby goods. Phone # (916) 486-4373. Please leave message.

RADIO/TELEPHONES FOR Remote Home or Business: Commercial quality, up to 20+ mi, Best Prices. (208-263-9755 PST) Send \$1 cash: KRES, Box 215-HP, Kootenai, ID 83840.

VERMONT PV DEALER. David Palumbo/Independent Power & Light has been installing off-grid systems, and helping do-it-yourselfers (who buy their equipment from him) with free professional design advice for over 10 yrs. Trojan and Surrette batteries. FREE with battery purchase IP&L deep cycle battery instructions. Trace, Solarex, Siemens, and BP at fair prices. Large supply of wire and cable. Beware of "fast buck artist," slick talking, "lowest price anywhere" mail order companies who don't take the time to find out what you really need and can't spend the time on personal support and service. Buy from an honest dealer who knows the products and cares about your success in using them. David's installations are innovative, simple to live with, and successful. And our long following of do-it-yourself customers always come back for more because they can rely on getting straight talk, no BS, and the best service possible. "David is one of the original RE pioneers... he knows how to really squeeze all the energy out of a KWH!" Richard Perez (HP60). I P & L, 462 Solar Way Drive, Hyde Park, Vermont 05655. Call David Palumbo 802-888-7194. Email: indeppower@aol.com. Web site: INDEPENDENT-POWER.COM. No catalog requests please. Please call for appointment before visiting.

FOR SALE: Photocopied reprints of *Home Power* issues 1-10 available. All proceeds will be donated to IRENEW. Call 815-469-5334 or e-mail Jeff_Green@msn.com. Sold only in sets of 1 thru 10 for \$30 which includes shipping in most cases.

NEMO SUBMERSIBLE WELL Pumps feature Flojet pumps enclosed in rubber gasketed all metal cases. Complete units low as \$155. Case Kits just \$50. Free Info Packet— Call 508-627-1319

DIRECT TO YOU SALE!!!! (no pickups on these items) Servel by Dometic 8.0 cu. ft. propane fridge \$1,049; Surrette Solar batteries(5 & 7 yr. warranty): CH-375-L16(6v, 375 ahr.),\$189; T-12-250(12v, 250 ahr.), \$239; Trojan T-105, \$65; all items freight extra. New Bogart Tri-metric meter \$169 delivered. VT Solar 1-800-286-1252

VERY LOW PRICES Solar Electric & Thermal Equip. Panels-Inverters, Charge regulators, wind generators-pumps-controls Please Call (888) 817-1737 or write to 6 Cresta Cir. #7, San Rafael, CA 94903

EDTA RESTORES SULFATED Batteries. EDTA tetrasodium salt, info, catalog, \$12/lb plus \$3.50 ship & handle. Trailhead Supply 325 E. 1165 N. Orem, UT 84057 http://www.webspawner.com/users/trailheadsupply e-mail: trailheadsupply@webtv.net

STEAM ENGINE KIT, all materials with machining drawings. Power small boat, generator, or machinery. Information; 55¢ stamp to Pearl Engine Co, RR1 Box 45 Sutton VT 05867, 802-467-3205

SOUTH TEXAS Solar - SBT Designs, sells and installs solar products and systems in a six county region. (210)698-7109. Our Alternative Energy Catalog only \$4.00 plus postage. Visit our showroom at 25840 IH-10 West #4, Boerne, Texas 78006 or visit us on the Internet at www.sbtdesigns.com

FREE SOFTWARE-Free Service will cut years off your home mortgage. Save you thousands of dollars. No Costs. Write: Dickinson Financial, Dept HP1, S51W22930 Partridge Lane, Waukesha WI 53189. Email dickinsn@execpc.com

R.E. BIOBASED LAWN Mower, Bush hedger, Tree trimmer and pellet mulcher ALL IN ONE! Child Safe, Coyote Not. Quiet! Pack 100 lbs. on trail friendly Feet using old weeds, NOW a Legal Pet in CA. Over 200 Colors to chose from! Young Male \$800, TrailPro \$1200, Wooly \$1000, Breed Female \$1900. Wool sample \$5 to: C.W.R. 1111 Hwy 339, Yerington, NV 89447—Llamas, Island Donkeys and Llamas at Cottonwood Ranch.

WANTED: The Midwest Renewable Energy Association is in need of two wind generator towers. We'd like Rohn SSV towers, one at 90' to 100', and the other at 110' to 120'. Donations always accepted. Please call Mick at 920-837-7523 or Katy at 715-592-6595.

Independence with a view! Lake-home with almost 5000sqft produces own electricity. Greenhouse, garden spaces, fruit trees, root cellar, summer kitchen, sauna, workshop, horse barn, lots of bedrooms. Share with your friends or have a retreat/B&B. \$310,000. 715-967-2730 skrug@win.bright.net

Business for sale: Well established Alternate energy/infloor heating located in N-W WI. Excellent customer base, consistently increasing local and national/international sales. Inventory, equipment, contracts, Blue sky. 715-967-2730.skrug@wind.bright.net

FIVE FOOT HIGH Nuclear Submarine Batteries are very conservatively designed to outlast the lifetime of a submarine boat (35 years). One of the great improvements is the use of calcium in the very thick oxide-lead positive plate. This allows low gassing during charging which results in only adding water once every two years, and much lower charge loss, due to charge migration during standby. We estimate for home use you will get 50 years or better with good care. Each cell can provide 15,400 watts per hour! A 12 volt system = 6 cells x 15,400 watts = 92,400 watt hours!! 2.2 volts per cell; 7000 amp hrs. When power is drawn from batteries at 200 amperes or less instead of 7000 amp-hours as above, kilowatt-hour ratings are increased 20 to 30%. This is due to the lower heating effect of the acid. Operating batteries at room temperature increases the efficiency still more. Using the electrolyte bubbling system built into the cells increases the efficiency still more. These batteries were made by Exide, one of the leaders of battery manufacturing. Weight 1068 lbs. with acid; 900 lbs. dry; 14" x 14" x 5 ft. high; fiberglass case for extra strength; 22 gal. ordinary auto battery acid (available in most cities for \$1.50 per gal.); all new cells shipped dry on pallets \$3,000 per cell, FOB Brockton MA. Will run average house for 6 months between charges. Can be trickle charged from commercial power, wind generators, or photovoltaic. You will find the quiet power of batteries is far better for peace of mind than a noisy generator that has to be serviced & fueled regularly. Be prepared for the Y2K problem in the year 2000 when many power companies will experience microprocessor and computer problems in managing the national grid system. Can your business handle a 2 or 3 week power outage? Is it worth the gamble? Why deal with small batteries with short lifetimes, replace the weak link in photovoltaic systems with true lifetime submarine battery cells! 508-588-5246

CHINESE DIESEL GENERATORS. 10 KW, 115/230 volt, 60 Hz@1800 RPM, Water cooled, electric start, Old style heavy, brush alternators, 3 hours per gallon, average home use. Tool kit, overhaul parts, \$3195.00 + freight. Wheel kits available. Other sizes available. Voice 315-628-0601, Fax 315-628-5797, Email: ellison@gisco.net

PROPERTY FOR SALE in sunny Costa Rica ideal for solar elec. tranquil secluded setting 30 mins from town 60 mins from Pacific beaches. Simple 4br home on approx 1 acre with tropical fruit trees. Only \$15,000. Call 011-506-385-1568 evenings or write Apdo 62-5200 Nicoya Guanacaste Costa Rica

SOLAR POWER OF TEXAS. For the installation of complete solar systems we cover the entire state. We can deliver any home power equipment that's related to the industry. We offer Solarex MST 43 watt modules at 2.57 Amp 12 Volt for \$185 each when you purchase ten or more. We have many other great bargains. For more information you can reach us at 7711 Colony Rd. Tolar TX 76476 or 800-474-1160 or email gaf@itexas.net. You can also visit us at our Web site at www2.itexas.net/gaf/

XXXXXXXXXX SW4024 \$2,299 XXXXXXXX Modules: US-64 \$299, BP275 \$369, SP75 \$379. Trace SW2512 \$1849, DR 3624 \$1099, DR 2424 & 2412 \$899, DR1524 & 1512 \$699. Prosigne 2512 \$1899. SunMar Excel NE \$899. Vestfrost R/F \$999, Vestfrost Freezer \$599, Consul propane 7.8 cu.ft. \$989. Air 403 12 & 24 volt \$479. Ten years industry experience. References available. Call today (toll free) 877-222-4990

NEW IN THE BOX Trace 2012 inverter with built-in standby battery charger, for sale. Call (507) 498-3277 nights.

FOR SALE:TWO New BP590 panels, \$450 each. Want: Kyocera J63 or J59 high voltage panels. New or used. 707-937-5565 Northern Cal.

HAVE YOU BUILT the MK 8.3 controller in issue 42 of *HP*, pg 31? We will pay you to build these D.C. generator controllers for us. Contact Genny DeeCee at 530-284-7849 8-5PDT, or frenergy@psln.com

BRAKEDRUM Windmill Plans by famous turbine designer Hugh Piggott. Plans: \$11. Wind Power Workshop Book: \$19. Available in USA only from www.picoturbine.com

YOUR ALASKAN SOLAR EXPERTS! Complete source for Alaskan alternative power. ABS Alaskan, 2130 Van Horn Road. Fairbanks, AK 99701 907/452-2002, AK 800/478-7145

The Mother Earth News, #s 1-125, and Lifestyle #s 1-8. All in excellent condition. \$275 postpaid within 48 states, OBO. Call Ian at 360-293-7448

BLACK/RED MARRIED Cable-AWG #12 heavy vinyl coating very flexible. Ideal for DC applications. 100 ft coil—\$20 each plus S/H email: bf@datawise.net, fax: 1 616 236 6186, mail: BTF Ltd POB 409 Ferrville MI 49408 USA

YOUR ALASKAN SOLAR EXPERTS! Complete source for Alaskan alternative power. ABS Alaskan, 2130 Van Horn Road. Fairbanks, AK 99701 907/452-142 2002, AK 800/478-7145

USED SUNFROST Refrigerator 12 VDC, Custom sized, walnut veneer cabinet, Underneath Storage Cabinet Stand w/Drawer included. Approx. Ten years old and similar to current RF-16 model. two compressors, new electronics, Outside Dimensions 68"hx34"wx27"d, Inside dimensions Freezer 26"x19"x13"h, Fridge 28"x28"x24"h. Works very well and is in excellent condition. All shelves included along with voltmeter and wire connections. Comparable factory price is \$3190 including options plus long waiting time. This one unit only is available immediately at Six Rivers Solar in Eureka,CA \$2000 firm. Call Greg at (707) 444-9277 9-noon PST.

3-BDR HOME,Energy self-sufficient, w/10 kW Jacobs wind generator on 100 ft. free-standing Rohn tower, 12x20 ft. workshop, 2.5 acres, 40 miles S of Santa Fe, \$150,000, Tim 505-281-1531

WATTS UP? Power Meter/electricity monitor up to 1500 watts/12.5 amps cumulative kilowatt hours Made in USA \$89 Post Paid BMS&S 1-888-917-9764

HOME POWER Back Issues—make offer: 1) vol 1-18 (1-4 have 3-ring binder punch holes) 2) vol 19-34 (no 33) 3) vol 35-69 Greg Colin, PO Box 1825, Chelan, WA 98816

TECHNICIAN IN RE is interested in buying used Photovoltaic Panels, Charge regulators and Track Racks in small quantities, but regularly. Shipment should be made to Florida. Payment terms to be agreed. Interested persons please write indicating models and prices to: Nieves Garcia, c/Corregidor Diego de Valderrabano, 1-28030 Madrid—Spain

FREE PROPERTY LIST for mountain land, some with creek or river frontage in beautiful Scott Valley, Northern California just 15 minutes west of Yreka off I-5 to 320 acre parcels, perfect area for retirement or country lifestyle. Call Scott Valley Real Estate (530) 468-2252, www.svre.com

MAKE YOUR OWN ELECTRICITY. Books, plans, kits for homebrew and educational solar and wind electricity www.picoturbine.com

FOR SALE TRACE DR1524 series inverter with conduit box option 3 years old like new condition. Call Michael 904 677 5736 \$700.00

FOR SALE: TWO Jacobs 32V. Mod. 60 2800 Wind Generators, complete with Tower and one control panel. 208-354-8661.

4.5 KW DIESEL Generators 7 available, runs 19 hrs @ full load, equipped with electric start & pull start, wheel kits, 6.5 gallon tank, water separator, (2) 110 & (1) 220V waterproof outlets w/circuit breakers. These are new units with 1 year warranties. \$2295 each or discount all together. Powerhouse Energy Systems 305 NE 8 Ct Pompano Beach FL 954-781-4167.

WWW.DC-PC.COM 12vdc desktop PC systems \$450 FOB 28 watts std kybd mouse minitower 486 FD HD w/ LCD VGA & DOS; runs MS Windows. box 9 Tilly AR 72679 888-376-6651

SILENT PORTABLE POWER STATIONS Anywhere, Anytime, No fossil fuels. 1000, 1500, or 2500 watt 115 VAC & 12 VDC on a compact chassis with a pull handle (one or two people can put it in your car or closet) yet has 2000 watts of battery storage area, making it ideal for emergencies, contractors, remote power camping & fun. These units can be charged with solar, your auto, or house AC and monitored with their easy to read built in volt & amp meters. Some of the many options including a 250 amp switch & connector for expanding the battery pack allowing for long operation of large loads. Promotional prices starting @ \$599.00 FREE Brochures write Monte Ogdahl @ pob 5471, SF NM 87502 or (505) 422-2268 Email @ monsan@socal.verio.net

STORAGE BATTERIES for SOLAR and WIND Energy Systems. 1000 AH Flooded Lead Calcium cells. Used in good condition. \$250 per cell. TEXRESYS, Inc. 940-564-3792 www.texresys.com.

Trace 2624SB Inverter. 24VDC, 2600 Watt Continuous, 6kW surge, 60A Charger, 30A transfer switch. \$625 707-765-6107

YOUR ALASKAN SOLAR EXPERTS! Complete source for Alaskan alternative power. ABS Alaskan, 2130 Van Horn Road. Fairbanks, AK 99701 907/452-2002, AK 800/478-7145

MUST SELL—Willing to negotiate Trace Sine Wave 4048 \$2,280 shipped anywhere in U.S. Never used. Heart 2012—\$640.00. 7.2 cu. ft. propane refrig/freezer by Danby \$860.00 Delivered anywhere in U.S. Immediate delivery on Trace inverters and power panels or power modules, Heart 750 watt w/25 amp charger \$315, Solarex MSX 120, 120 watt \$575. Call 305-536-9917 or Fax 305-371-2353

Index to Advertisers

- Abraham Solar — 95
Adopt a Library — 129
Advanced Composting Systems — 82
Alternative Energy Engineering — 5
Alternative Energy Systems Co — 67
Alternative Solar Products — 18
American Solar Energy Society — 89
Applied Power Corporation — 4
BackHome Magazine — 137
Backwards to the Future — 47
Backwoods Solar Electric Systems — 63
Bell Solar International Inc — 98
Bogart Engineering — 97
Bowers Power Systems — 103
BP Solar — 2 & 41
Brand Electronics — 59
BZ Products — 125 & 137
C. Crane Company — 125
C.C. Solar Technologies — 125
Canrom Photovoltaics Inc — 47
China Diesel — 65
Cottonwood Ranch — 82
Creative Energy Tech — 103
Dankoff Solar Products — 64
Delivered Solutions — IBC
Eklektix — 130
Electro Automotive — 130 & 141
Electron Connection — 96
Energy Conservation Services — 64
Energy Outfitters — 117
Energy Systems & Design — 111
Environmental Marketing Inc — 78
EPOWER — 122
ETA Engineering Inc — 106
Exeltech — 52
Feather River Solar Electric — 78
FireWind&Rain — 48
Global Power Systems — 139
Glockemann Pumps of America — 121
Golden Genesis Global Distribution — OBC
Green Mountain — 53
Greenshelf — 107
Guerrilla Solar T-shirts — 82
Harris Hydroelectric — 125
Heart Interface — 1
Heaven's Flame — 91
Heliotrope General — 141
Hitney Solar Products — 103
Home Power Back Issues — 139
Home Power Biz Page — 81
Home Power CD-ROMs — 80
Home Power Sub Form — 80
Home Power T-shirts — 91
Horizon Industries — 125
HOTPRO — 109
Hydrocap — 117
I-RENEW — 76
Intermountain Solar Technologies — 73
International Carbon Bank and Exchange — 137
Jack Rabbit Energy Systems — 79
KTA — 106
Low Keep Refrigeration — 122
Maple State Battery — 107
MHS Solar — 63
Millennium Power Systems — 30
Morningstar — 78
MREA Workshops — 121
Natural Energy Systems — 122
New Electric Vehicles — 91
New England Solar Electric Inc — 110
New England Solar Homes — 39
Newinli Corp — 73
Northern Arizona Wind & Sun — 99
Northwest Energy Storage — 57 & 76
Offline — 139
Palouse Wind & Water — 122
Planetary Systems — 78
Quick Start REading Special — 129
Quicksilver Electric Company — 122
RAE Storage Battery Co — 137
RCH Fan Works — 110
Refrigeration Parts Solution — 137
Renewable Energy Videos — 82
Rolls Battery Engineering — 66
RV Power Products — 72
Siemens Solar Industries — 19
Simmons Handcrafts — 139
Simpler Solar Systems — 79
Snorkel Stove Company — 103
Solar Depot — IFC
Solar Electric Inc — 107
Solar Energy International — 90
Solar On Sale — 97 & 111
Solar Pathfinder — 137
Solar Plexus — 83
Solar Village Institute — 83
Solar Webb Inc — 110
Solar Works — 122
Solarex — 49
SolarRoofs.com — 107
SolarSense.com — 9
Solec — 33
Soltek — 117
Southwest Renewable Energy Fair — 80
Southwest Windpower — 32 & 106
Staber Industries — 99
Sun Electronics — 58
Sun Frost — 72
SunAmp Power Company — 102
Sunlight Energy Corp — 79
SunLine Solar — 107
Sunweaver — 82
SunWize — 83
Surrette Battery Company Ltd — 47
Trace Engineering — 17 & 66
Tractel Inc — 102
Trojan — 16
Tumbler Technologies — 121
Two Seas Metalworks — 40
U.S. Battery — 31
Vanner Power Systems — 71
Veggie Van — 130
Vermont Solar Engineering — 107
Wattsun (Array Tech Inc) — 111
Windstream Power Systems Inc — 82
Wisconsin Energy Bureau — 102
World Power Technologies — 72
Zomeworks — 110



WHAT DO YOU WANT?

- Pre-Packaged Solar Electric Systems
- Easy-To-Install, Hassle-Free Systems
- Great Prices
- Engineered & Partially Pre-assembled
- Code Compliant Systems
- Easy-to-follow Installation Manual
- Technical Assistance Provided
- Owner-Builder Discounts




- PV Panels
- Batteries
- Regulators
- Inverters
- Switchgear
- Wind Generators
- Solar Water Heaters

WE FIGURED YOU WOULD!

SO WE MADE:



- Utility-Connected Models
- Off-Grid, Stand-Alone Models
- Hybrid Models with Wind or Hydro

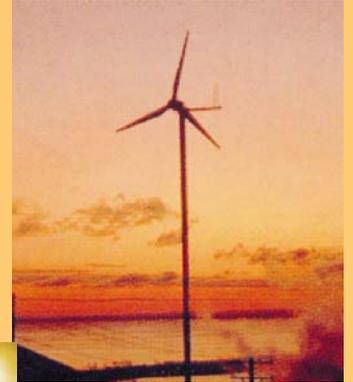

ATTRACTIVE DEALER DISCOUNTS

Checkout our on-line catalog at
www.solardepot.com/pvcatalog/index.html



WE ARE



Solar-Depot-San Rafael
61 Paul Drive
San Rafael, CA, 94903

email staff@solardepot.com

(415) 499-1333

Fax (415) 499-0316

Orderline (800) 822-4041



Solar Depot-Sacramento
8605 Folsom Blvd.
Sacramento, CA, 95826
email soldrpo@calweb.com
(916) 381-0235
Fax (916) 381-2603
Orderline (800) 321-0101





Refrigerators And Freezers

- Super Energy Efficient
- Totally Recyclable
- Thousands In Service On And Off The Grid
- European Styling
- Refrigerator Available With Stainless Steel Doors



Exclusively Distributed By



GOLDEN GENESIS COMPANY
Global Distribution

7812 East Acoma Drive
Scottsdale, Arizona 85260

480.951.6330 800.544.6466 Fax 480.951.6329

Website www.goldengenes.com



Home Power Subscription

\$22.50 per year (6 issues) to U.S. Zip codes via 2nd Class U.S. Mail
\$36.00 per year (6 issues) to U.S. Zip codes via 1st Class U.S. Mail
\$30.00 (U.S. drawn on U.S. Bank) International Surface Mail, see pg. 81 for Air Rates

Home Power Magazine, PO Box 520, Ashland, OR 97520
Subscriptions: 800-707-6585 (inside USA) or 541-512-0201 or FAX 541-512-0343
Editorial and Advertising: 530-475-3179 or FAX 530-475-0836

To subscribe to Home Power, please fill out the sub form below, enclose payment as a check, money order, or Visa/MasterCard, and mail this form. Tape the form well or use an envelope so your check doesn't fall out. Your sub or renewal will start with HP's next regularly scheduled issue. Please allow up to ten weeks for the start of your 2nd class sub. For those wishing **International Subscriptions or Back Issues of Home Power, please see page 81.**

- New 2nd Class Sub-\$22.50 to USA Zip Codes New 1st Class Sub-\$36 to USA Zip Codes Sub Renewal Specify 1st or 2nd Class Change of Address Include Old Address
- Gift subscription
From (give your name and address here) _____

DO YOU WANT US TO SEND YOU A SUBSCRIPTION RENEWAL NOTICE?

The number of the last issue in your subscription is printed on your mailing label.

- Yes, remind me by mail when my subscription runs out. No, I'll check my mailing label so we can save energy & paper.

PLEASE CLEARLY PRINT BELOW THE COMPLETE NAME AND ADDRESS FOR THIS SUBSCRIPTION

NAME _____

STREET _____

CITY _____ STATE _____ ZIP _____

PHONE _____ E-MAIL _____

-  **Credit Card Orders:** please check the type of card you have and fill in the information below.
- Signature (as shown on Card) _____ Exp. Date _____
-  Credit Card Number _____ Amount \$ _____

The following information about your renewable energy usage helps us produce a magazine which better serves your interests. This information will be held confidential. We do not sell our mailing list. Completion of the rest of this form is not necessary to receive a subscription, but we would greatly appreciate your input.

NOW: I use renewable energy for (check ones that best describe your situation)

- All electricity
- Most electricity
- Some electricity
- Backup electricity
- Recreational electricity (RVs, boats, camping,)
- Vacation or second home electricity
- Transportation power (electric vehicles)
- Water heating
- Space heating
- Business electricity

In The FUTURE: I plan to use renewable energy for (check ones that best describe your situation)

- All electricity
- Most electricity
- Some electricity
- Backup electricity
- Recreational electricity (RVs, boats, camping,)
- Vacation or second home electricity
- Transportation power (electric vehicles)
- Water heating
- Space heating
- Business electricity

RESOURCES: My site(s) have the following renewable energy resources (check all that apply)

- Solar power
- Wind power
- Hydro power
- Biomass
- Geothermal power
- Tidal power
- Other renewable energy resource (explain)

The GRID: (check all that apply)

- I have the utility grid at my location.
- I pay _____¢ for grid electricity (cents per kiloWatt-hour).
- _____% of my total electricity is purchased from the grid.
- I sell my excess electricity to the grid.
- The grid pays me _____¢ for electricity (cents per KiloWatt-hour).

(continued on reverse)

I now use, or plan to use in the future, the following renewable energy equipment (check all that apply).

NOW	FUTURE		NOW	FUTURE	
<input type="checkbox"/>	<input type="checkbox"/>	Photovoltaic modules	<input type="checkbox"/>	<input type="checkbox"/>	Methane digester
<input type="checkbox"/>	<input type="checkbox"/>	Wind generator	<input type="checkbox"/>	<input type="checkbox"/>	Thermoelectric generator
<input type="checkbox"/>	<input type="checkbox"/>	Hydroelectric generator	<input type="checkbox"/>	<input type="checkbox"/>	Solar oven or cooker
<input type="checkbox"/>	<input type="checkbox"/>	Battery charger	<input type="checkbox"/>	<input type="checkbox"/>	Solar water heater
<input type="checkbox"/>	<input type="checkbox"/>	Instrumentation	<input type="checkbox"/>	<input type="checkbox"/>	Wood-fired water heater
<input type="checkbox"/>	<input type="checkbox"/>	Batteries	<input type="checkbox"/>	<input type="checkbox"/>	Solar space heating system
<input type="checkbox"/>	<input type="checkbox"/>	Inverter	<input type="checkbox"/>	<input type="checkbox"/>	Hydrogen cells (electrolyzers)
<input type="checkbox"/>	<input type="checkbox"/>	Controls	<input type="checkbox"/>	<input type="checkbox"/>	Fuel cells
<input type="checkbox"/>	<input type="checkbox"/>	PV tracker	<input type="checkbox"/>	<input type="checkbox"/>	RE-powered water pump
<input type="checkbox"/>	<input type="checkbox"/>	Engine/generator	<input type="checkbox"/>	<input type="checkbox"/>	Electric vehicle

FOLD HERE AND TAPE EDGES

Please write to us here. Tell us what you like and don't like about Home Power. Tell us what you would like to read about in future issues. Thanks for your attention and support.

Check here if it is OK to print your comments as a letter to Home Power.

FOLD HERE AND TAPE EDGES

Return Address



Home Power Magazine
Post Office Box 520
Ashland, OR 97520